முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரியின் EIA / EMP வரைவு

(EIA அறிவிப்பு 2006 மற்றும் அதன் திருத்தங்களின்படி பொது விசாரணைக்கு சமர்ப்பிக்கப்பட்டது)

ToR அடையாள எண். TO24B0108TN5964918N(F.No.10951), தேதி 16.07.2024

முன்மொழியப்பட்ட குவாரி குத்தகை விவரங்கள்	
சர்வே எண்	34/1B1, 35/2B, 35/3 மற்றும் 35/4
கிராமம்	நல்முக்கல்
வட்டம்	மரக்காணம்
மாவட்டம்	விழுப்புரம்
விஸ்தீரணம்	4.75.0 ஹெக்டேர்
முன்மொழியப்பட்ட உற்பத்தி (முதல் ஐந்து வருடம்)	8,89,700 கன மீட்டர் சாதாரண கல் 96,210 கன மீட்டர் கிராவல்
நிலம்	பட்டா நிலம்

(NABET இன் படி பிரிவு எண். 1(a) துறை எண்.1)

திட்டத்தின் வகை: B1 கிளஸ்டர் சுரங்கம், மொத்த கிளஸ்டர் பகுதி –10.65.0 ஹெக்டேர்

அடிப்படை கண்காணிப்பு காலம் – மார்ச் 2024-முதல் மே 2024 வரை.

விண்ணப்பதாரர்

திரு.V.நாகராஜன்,

த/பெ.வரதராஜ் கவுண்டர், எண். 65, மரக்காணம் ரோடு,

பெருமுக்கல் கிராமம், மரக்காணம் வட்டம்,

விழுப்புரம் மாவட்டம்-604301.

அறிக்கை தயாரித்தவர்

தி/ள். குளோபல் மைனிங் சொல்யூஷன்ஸ்,

(NABET அங்கீகாரம் மற்றும் ISO 9001 சான்றளிக்கப்பட்ட நிறுவனம்)

பிளாட் எண். 6, புலஎண். 13/2, A2, VS சிட்டி, RC செட்டிப்பட்டி, கோட்டமேட்டுப்பட்டி, ஓமலூர், சேலம், தமிழ்நாடு –636 455

NABET அங்கீகார எண் - NABET/EIA/2326/IA 0110

தொடர்புக்கு **: 97502 23535, 94446 54520**

Email: infoglobalmining@gmail.com: globalminingsolutionssalem@gmail.com

செப்டம்பர் - 2024

திருத்தம் பக்கம்

வரிசை எண்	பக்க எண்.	பிரிவு / பத்தி / வரி (எனபொருந்தும்)	திருத்தம் செய்யப்பட்ட தேதி	மேற்கொள்ளப்பட்ட திருத்தங்கள்	திருத்தத்தின் காரணம்	திருத்தம் மேற்கொள்ளும் அங்கீகரிக்கப்பட்ட நபரின் கையொப்பம்
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

அங்கீகாரம்

தி/ள். குளோபல் மைனிங் சொல்யூஷன்ஸ் சேலம், திரு.V.நாகராஜன், (குத்தகைதாரர்) அவர்களுக்கு விழுப்புரம் மாவட்டம், மரக்காணம் வட்டம், நல்முக்கல் கிராமத்தில், 4.75.0 ஹெக்டேர் & கிளஸ்டர் பரப்பு 10.65.0 ஹெக்டேர் பரப்பளவில், முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரிக்கான சுற்றுச்சூழல் தாக்க மதிப்பீடு (EIA) ஆய்வை மேற்கொள்வதற்காகவும் மற்றும் சுற்றுச்சூழல் மேலாண்மை திட்டத்தை (EMP) உருவாக்குவதற்கும், எங்கள் நிறுவனம் மீதுள்ள நம்பிக்கைக்காக மிகவும் நன்றி. EIA/EMP அறிக்கையைத் தயாரிப்பதற்காக இரண்டாம் நிலைத் தகவல்களைச் சேகரிப்பதற்காக சம்பந்தப்பட்ட அரசாங்க அதிகாரிகள் வழங்கிய ஒத்துழைப்பையும் உதவியையும் நாங்கள் நன்றியுடன் ஒப்புக்கொள்கிறோம். நல்முக்கல் கிராமம் மற்றும் அருகிலுள்ள கிராமங்களைச் சேர்ந்த உளூர் மக்களுக்கும், முழுக் கள ஆய்வின் போது முழு மனதுடன் ஒத்துழைத்ததற்கும், தொடர்ந்து ஈடுபாடு காட்டியதற்கும் எங்கள் மனமார்ந்த நன்றிகள்.

இதற்கு:தி/ள்.குளோபல் மைனிங் சொல்யூஷன்ஸ்

(எம்.பிரபு)

நிர்வாக இயக்குனர்

மேற்கொள்ளுதல்

MoEF & CCக்கு ஏற்ப, OM எண். J – 11013/41/2006-IA.II (I) தேதி 5வது அக்டோபர் 2011, தமிழ்நாடு, விழுப்புரம் மாவட்டம், மரக்காணம் வட்டம், நல்முக்கல் கிராமத்தில், 4.75.0 ஹெக்டேர் & கிளஸ்டர் பரப்பு 10.65.0 ஹெக்டேர் பரப்பளவில், முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரியின் EC க்காக சமர்ப்பிக்கப்பட்ட EIA/EMP அறிக்கையில் உள்ள உள்ளடக்கம் மற்றும் தகவலைச் சொந்தமாக வைத்திருப்பதற்கான உறுதிமொழியை நாங்கள் வழங்குகிறோம்.

இதற்கு: தி/ள்.குளோபல் மைனிங் சொல்யூஷன்ஸ்

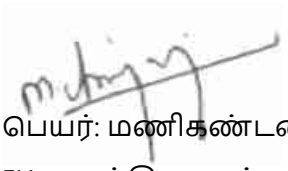

பெயர்: மணிகண்டன் மாணிக்கம்
EIA ஒருங்கிணைப்பாளர் - கனிமங்களின் சுரங்கம்

மேற்கொள்ளுதல்

இந்த EIA & EMP ஆனது MoEF&CCOM எண்J-11013/41/2006-*IA.II* (1) தேதியிட்ட 4 ஆகஸ்ட் 2009 மற்றும் அதன் திருத்தங்கள் ஏற்ப தயாரிக்கப்படுகிறது. மேலும், சுற்றுச்சூழல், வனம் மற்றும் காலநிலை மாற்ற அமைச்சகத்தால் வழங்கப்பட்ட அனைத்து குறிப்பு விதிமுறைகளும், TOR கடிதம் எண்: TO24B0108TN5964918N (F.No.10951) தேதி: 16.07.2024 கணக்கில் எடுத்துக்கொள்ளப்பட்டு, இந்த வரைவு EIA/EMP அறிக்கையில் இணைக்கப்பட்டுள்ளது.இந்த EIA & EMP ஆனது தமிழ்நாடு விழுப்புரம் மாவட்டம், மரக்காணம்வட்டம், நல்முக்கல் கிராமத்தில், 4.75.0 ஹெக்டேர் & கிளஸ்டர் பரப்பு 10.65.0 ஹெக்டேர் பரப்பளவில் முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரிய 8,89,700 கன மீட்டர் சாதாரண கல் 96,210 கன மீட்டர் கிராவல் உற்பத்தி செய்வதற்காக தயாரிக்கப்பட்டுள்ளது. மற்றும் EIA/EMP அறிக்கையில் இணங்கப்பட்டுள்ள விவரங்கள் உண்மையில் சரியானவை.

EIA/EMP அறிக்கை, தி/ள் குளோபல் மைனிங் சொல்யூஷன்ஸ் (ஜிஎம்எஸ்), சேலம் ஆல் தயாரிக்கப்பட்டது. ஜிஎம்எஸ் என்பது ஒரு *NABET* அங்கீகாரம் பெற்ற கனிமச் சுரங்கத்தின் EIA/EMP அறிக்கையைத் தயாரிப்பதற்கான (திறந்தவெளி சுரங்கம் மட்டும்) ஆலோசகர். *NABET* சான்றிதழ் எண். *NABET/EIA/*2326/*IA* 0110, மற்றும் இந்த சான்றிதழ் 04.01.2026 வரை செல்லுபடியாகும்.

இதற்கு: தி/ள்.குளோபல் மைனிங் சொல்யூஷன்ஸ்

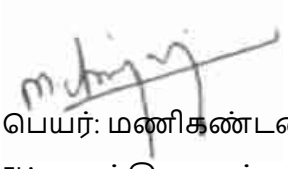

பெயர்: மணிகண்டன் மாணிக்கம்
EIA ஒருங்கிணைப்பாளர் - கனிமங்களின் சுரங்கம்

QUALITY COUNCIL® OF INDIA
Creating an Ecosystem for Quality

NABET

National Accreditation Board for Education and Training

NABET

Certificate of Accreditation

Global Mining Solutions

Plot No - 6 SF No 13/2 A2, VS City, RC Chettypatty,
Kottamettupatty, Omalur, Salem, Tamil Nadu-636455

The organization is accredited as ***Category-B*** *under the QCI-NABET Scheme for Accreditation of EIA Consultant Organizations, Version 3: for preparing EIA-EMP reports in the following Sectors –*

S. No	Sector Description	Sector (as per)		Cat.
		NABET	MoEFCC	
1	Mining of minerals-opencast mining only	1	1 (a) (i)	A

Note: Names of approved EIA Coordinators and Functional Area Experts are mentioned in IAAC minutes dated February 10, 2023, posted on the QCI-NABET website.

The Accreditation shall remain in force subject to continued compliance with the terms and conditions mentioned in QCI-NABET's letter of accreditation bearing no. QCI/NABET/ENV/ACO/23/2724 dated March 31, 2023. The accreditation needs to be renewed before the expiry date by Global Mining Solutions, Salem following the due process of assessment.

NABET

Sr. Director, NABET
Date: March 31, 2023

Certificate No.
NABET/EIA/2326/IA 0110

Valid up to
January 4, 2026

For the updated List of Accredited EIA Consultant Organizations with approved Sectors please refer to the QCI-NABET website.

நிபுணரின் அறிவிப்பு

தமிழ்நாடு, விழுப்புரம் மாவட்டம், மரக்காணம் வட்டம், நல்முக்கல் கிராமத்தில், 4.75.0 ஹெக்டேர் & கிளஸ்டர் பரப்பு 10.65.0 ஹெக்டேர் பரப்பளவில் உத்தேச சாதாரண கல் மற்றும் கிராவல் குவாரிக்கு பங்களிப்பு செய்யும் நிபுணர்களின் அறிவிப்பு. மேற்கூறிய EIA ஐ உருவாக்கிய EIA குழுவில் நானும் ஒரு பகுதியாக இருந்தேன் என்பதை இதன் மூலம் சான்றளிக்கிறேன்.

EIA ஒருங்கிணைப்பாளர் பெயர்: மணிகண்டன் மாணிக்கம்

கையொப்பம் மற்றும் தேதி

ஈடுபாட்டின் காலம்: மார்ச் 2024- முதல் மே 2024 வரை.



தொடர்பு தகவல்:

தி/ள்.குளோபல் மைனிங் சொல்யூஷன்ஸ்,

பிளாட் எண்.6, SF எண். 13/2, A2, VS சிட்டி, RC செட்டிபட்டி,

கோட்டமேட்டுப்பட்டி, ஓமலூர்,

சேலம், தமிழ்நாடு - 636 455

வ. எண்	செயல்பாட்டு பகுதிகள்	நிபுணர்கள் பெயர்	ஈடுபாடு (காலம் மற்றும் பணி**)	கையொப்பம் மற்றும் தேதி
1	AP	தனலட்சுமி ராமநாதன்	தற்போதுள்ள காற்றின் தரத்தை மதிப்பீடு செய்தல், சுற்றுப்புற காற்றில் திட்டத்தின் தாக்கம் மற்றும் காற்று மாசுபாட்டிற்கான பரிந்துரைகளை குறைக்கும் நடவடிக்கைகள். காலம்: மார்ச் 2024-முதல் மே 2024 வரை.	
2	WP	அபிராமி கலியபெருமாள்	தற்போதுள்ள நீரின் தரத்தை மதிப்பீடு செய்தல், மேற்பரப்பு மற்றும் நிலத்தடி நீரின் தரத்தில் திட்டத்தின் தாக்கம், பாதிப்பைக் குறைப்பதற்கான தணிப்பு நடவடிக்கைகளை பரிந்துரைத்தது. காலம்: மார்ச் 2024-முதல் மே2024 வரை.	
3	SHW	ராமதாஸ் என்	திட்டத்தில் இருந்து உருவாகும் கழிவுகளை மதிப்பீடு செய்தல், கழிவு மேலாண்மை நடைமுறைகள் பரிந்துரைக்கப்பட்டது. காலம்: மார்ச் 2024-முதல் மே 2024 வரை.	
4	SE	சரஸ்வதி கே	அடிப்படை SE ஆய்வு. தரவு தொகுப்பு மற்றும் மதிப்பீடு. பகுதியின் SE நிலையில் திட்டத்தின் தாக்கம். CER திட்டத்தின் உருவாக்கம். காலம்: மார்ச் 2024- முதல் மே2024 வரை.	
5	EB	சரவணன் எஸ்	பிரதேசத்தின் சூழலியல் தொடர்பான அடிப்படை தரவு சேகரிப்பு. காலம்: மார்ச் 2024-முதல் மே 2024 வரை.	
6	HG	ரவீந்திரன் என்	இப்பகுதியின் நீர்வளவியல் அம்சம். நிலத்தடி நீர் ஆழம் மற்றும் இப்பகுதியின் நிலத்தடி நீரில் திட்டத்தின் தாக்கம். காலம்:மார்ச் 2024 -முதல் மே 2024 வரை.	
7	AQ	ஸ்ரீலதா திருவீதியுலா	பகுதி மூல மாதிரியைப் பயன்படுத்தி காற்றின் தர மாதிரியாக்கம். தூசியின் தரை மட்ட செறிவின் கணிப்பு. தகுந்த தணிப்பு நடவடிக்கைகளை பரிந்துரைத்தல். காலம்: மார்ச் 2024- முதல் மே2024 வரை.	
8	NV	தனலட்சுமி	பகுதியின் சுற்றுப்புற இரைச்சல் ஆய்வு.	

		ராமநாதன்	குவாரி செயல்பாடு மற்றும் திட்டத்தால் ஏற்படும் சத்தத்தின் தாக்கம் காரணமாக அதிகரிக்கும் சத்தம். காலம்: மார்ச் 2024- முதல் மே2024 வரை.	
9	LU	தனலட்சுமி ராமநாதன்	செயற்கைக்கோள் படங்களின் அடிப்படையில் நில பயன்பாட்டு வரைபடம் தயாரித்தல். நில பயன்பாட்டு வகைப்பாடு மற்றும் பகுப்பாய்வு. சுற்றியுள்ள நில சூழலில் திட்டத்தின் தாக்கம் கணிப்பு. காலம்: மார்ச் 2024- முதல் மே 2024 வரை.	
10	RH	எஸ்.வி. பிரசாந்த்	சுரங்க நடவடிக்கைகள் தொடர்பான இடர்களை கண்டறிதல். அவசரகால பேரிடர் மேலாண்மை திட்டத்தை தயாரித்தல். தொழிலாளிக்கு பாதுகாப்பு உபகரணங்களை வழங்குவதற்கான திட்டம். காலம்: மார்ச் 2024- முதல் மே 2024 வரை.	
11	SC	சிசுபால் சிங்	மண் கண்காணிப்பு, மண்ணின் வகை, மண் மேலாண்மை நடைமுறைகள், மேல் மண்ணின் பயன்பாடு குறித்த இரண்டாம் நிலை தரவு சேகரிப்பு. காலம்: மார்ச் 2024- முதல் மே 2024 வரை.	
12	GEO	வள்ளியப்பன் மெய்யப்பன்	புவியியல் வரைபடம், குவாரி மற்றும் குப்பைகளின் ஸ்திரத்தன்மை, சுரங்க குவாரியின் பயன்பாட்டிற்குப் பிறகு சுரங்க நிலைத்தன்மைக்கான மேலாண்மைத் திட்டம் மற்றும் பகுதியின் புவியியல் அம்சம். காலம்: மார்ச் 2024- முதல் மே 2024 வரை.	

EIA உள்ளடக்கங்கள்

அத்தியாயம்	தலைப்பு	பக்க எண்
1	**அறிமுகம்**	**67**
1.1	அறிக்கையின் நோக்கம்	67
1.2	திட்டம் மற்றும் திட்ட ஆதரவாளரின் அடையாளம்	69
1.3	இயல்பு, அளவு, திட்டத்தின் இருப்பிடம் மற்றும் நாடு, பிராந்தியத்திற்கு அதன் முக்கியத்துவம் பற்றிய சுருக்கமான விளக்கம்	70
1.4	ஆய்வின் நோக்கம் - நடத்தப்பட்ட ஒழுங்குமுறை இணக்கங்கள் விவரங்கள் (குறிப்பு விதிமுறைகளின்படி)	71
2	**திட்ட விளக்கம்**	**74**
2.1	திட்டத்தின் வகை	74
2.2	திட்டத்தின் தேவை	75
2.3	இடம் (பொது இடம், குறிப்பிட்ட இடம், திட்ட எல்லை & திட்ட தள தளவமைப்பு ஆகியவற்றைக் காட்டும் வரைபடங்கள்):	75
2.4	செயல்பாட்டின் அளவு அல்லது அளவு (திட்டம் அல்லது திட்டத்திற்குத் தேவைப்படும் தொடர்புடைய செயல்பாடுகள் உட்பட):	83
2.5	ஒப்புதல் மற்றும் அமலாக்கத்திற்கான முன்மொழியப்பட்ட அட்டவணை	84
2.6	தொழில்நுட்பம் மற்றும் செயல்முறை விளக்கம்	84
2.7	திட்ட விவரம், திட்டம் போன்றவற்றின் கூறுகளைக் காட்டுவது வரைதல் உள்ளிட்ட திட்ட விளக்கம்	89
2.8	சுற்றுச்சூழல் தரநிலைகள், சுற்றுச்சூழல் இயக்க நிலைமைகள் அல்லது பிற EIA தேவைகள் (தேவையான தேவைகள்) ஆகியவற்றைப் பூர்த்தி செய்வதற்கான திட்டத்தில் இணைக்கப்பட்ட தணிப்பு நடவடிக்கைகளின் விளக்கம்	96
2.9	தொழில்நுட்பத் தோல்வியின் அபாயத்திற்கான புதிய & சோதிக்கப்பட்ட தொழில்நுட்பத்தின் மதிப்பீடு:	99
3	**சுற்றுச்சூழலின் விளக்கம்**	100
3.1	திட்ட பகுதியின், காலக் கூறுகள் மற்றும் முறை	100
3.2	சுற்றுச்சூழல் கூறுகளுக்கான அடித்தளத்தை நிறுவுதல்	104
3.3	அனைத்து சுற்றுச்சூழல் கூறுகளின் அடிப்படை வரைபடம்	105
4	**எதிர்பார்க்கப்பட்ட சுற்றுச்சூழல் தாக்கங்கள் மற்றும் தணிப்பு நடவடிக்கைகள்**	**150**
4.1	திட்ட இடம் சாத்தியமான விபத்துக்கள், திட்ட வடிவமைப்பு, திட்ட கட்டுமானம், வழக்கமான செயல்பாடுகள் இறுதி குழுமத்தின் காரணமாக ஆய்வு செய்யப்பட்ட சுற்றுச்சூழல் பாதிப்புகளின் விவரங்கள்	151
4.2	எதிர்பார்க்கப்பட்ட தாக்கங்கள் மற்றும் தணிப்பு நடவடிக்கைகள்	151
4.3	சுற்றுச்சூழல் கூறுகளின் மீளமுடியாத மற்றும் திரும்பப்பெற முடியாத உறுதிப்பாடுகள்	156
4.4	தாக்கங்களின் முக்கியத்துவத்தை மதிப்பீடு செய்தல் (முக்கியத்துவத்தை தீர்மானிப்பதற்கான அளவுகோல்கள், முக்கியத்துவத்தை ஒதுக்குதல்).	168

4.5	தணிப்பு நடவடிக்கைகள்	169
5	**மாற்றுகளின் பகுப்பாய்வு (தொழில்நுட்பம் & தளங்கள்)**	174
5.1	மாற்று தொழில்நுட்பம்	174
5.2	ஒவ்வொரு மாற்றின் பாதகமான தாக்கங்களின் சுருக்கம்	174
5.3	முன்மொழியப்பட்ட தடுப்பு நடவடிக்கைக்கான மாற்று தொழில் நுட்பம்	174
5.4	மாற்று தளம்	174
6	சுற்றுச்சூழல் கண்காணிப்பு திட்டம்	**175**
6.1	சுற்றுச்சூழல் கண்காணிப்பு	175
7	**கூடுதல் படிப்புகள்**	**179**
7.1	பொது ஆலோசனை	179
7.2	இடர் மதிப்பீடு & மேலாண்மை	179
7.3	மறுவாழ்வு மற்றும் மீள்குடியேற்றம் (ஆர் & ஆர்) திட்டம்	181
8	**திட்ட பலன்கள்**	**192**
8.1	உள்கட்டமைப்பில் மேம்பாடுகள்.	192
8.2	சமூக உள்கட்டமைப்பில் மேம்பாடுகள்	192
8.3	வேலை வாய்ப்பு: திறமையான, & திறமையற்ற வேலையாள்	193
8.4	மற்ற உறுதியான பலன்கள்	193
9	**சுற்றுச்சூழல் செலவு பலன் பகுப்பாய்வு**	**194**
10	**சுற்றுச்சூழல் மேலாண்மை திட்டம்**	**195**
10.1	நோக்கங்கள்	195
11	**சுருக்கம் மற்றும் முடிவுகள்**	**202**
11.1	திட்டத்தைச் செயல்படுத்துவதற்கான அனைத்து சாத்திய கூறுகள்.	202
11.2	பாதகமான விளைவுகள் எவ்வாறு குறைக்கப்பட்டன என்பதற்கான விளக்கம்	208
12	**ஈடுபட்டுள்ள ஆலோசகர்களின் வெளிப்பாடு**	**220**

படங்களின் பட்டியல்

படங்களின் எண்	தலைப்பு	பக்க எண்
1.1	கிளஸ்டர் குவாரிகளைக்காட்டும் செயற்கைக் கோள்படம்	68
2.1	இட வரைபடம்	76
2.2	திட்டத் தளத்தைக் காட்டும் கூகுள் படம்	77
2.3	திட்டப் பகுதியின் மேற்பரப்புத் திட்டம்	78
2.4	திட்டப் பகுதியின் புவியியல் வரைபடம்	79
2.5	ஏற்கனவே உள்ள தள அம்சங்களைக் காட்டும் டோபோ வரைபடம்	81
2.6	திட்ட தள புகைப்படங்கள்	82
2.7	நீர் இருப்பு வரைபடம்	85
2.8	திட்டப் பகுதியிலிருந்து 10 கிமீ சுற்றளவு பிராந்திய புவியியல்	88
2.9	வெடிக்கும் முறை (நிலை)	90
2.10	குவாரி செயல்பாட்டின் ஓட்ட விளக்கப்படம்	91
2.11	குவாரியின் இறுதி நிலை	95
3.1	ஆய்வுப் பகுதியின் சுற்றுச்சூழல் அமைப்பு	103
3.2	குத்தகைப் பகுதியிலிருந்து 1 கிமீ சுற்றளவுக்கு 50 மீட்டர் இடை வெளியைக் காட்டும் அடிப்படை வரைபடம்	106
3.2.A	திட்டப்பகுதியின் செயற்கைக் கோள்வரை படம் (10 கிமீசுற்றளவு)	107
3.3	இந்தியாவின் நில அதிர்வு வரைபடம்	108
3.4	விண்ட் ரோஸ் ப்ளாட்	109
3.5	சுற்றுப்புற காற்று கண்காணிப்பு இடங்கள்	111
3.6	சுற்றுப்புற காற்றின் தர தரவு A1 – சுரங்க குத்தகை பகுதி	113
3.7	சுற்றுப்புற காற்றின் தர தரவு A2 – நல்முக்கல் கிராமம்	113
3.8	சுற்றுப்புற காற்றின் தர தரவு A3 – தொள்ளமூர் கிராமம்	114
3.9	சுற்றுப்புற காற்றின் தர தரவு A4 – குன்னபாக்கம் கிராமம்	114
3.10	சுற்றுப்புற காற்றின் தர தரவு A5 – ஏந்தூர் கிராமம்	115
3.10. a	சுற்றுப்புற காற்றின் தர தரவு A6 – தென்னம்பூண்டி கிராமம்	115
3.11 & 3.11 a	நிலத்தடி நீர் / மேற்பரப்பு நீர் மாதிரி இடங்கள்	118
3.12	நீர் பகுப்பாய்வின் சில பொதுவான அளவுருக்களின் மதிப்புகள்	121
3.13	இரைச்சல் கண்காணிப்பு இடங்கள்	122
3.14	6 இடங்களில் பகல் மற்றும் இரவு சமமான மதிப்புகள்	123
3.15	மண் மாதிரி இடங்கள்	123
3.16	ரிமோட் சென்சிங் செயற்கைக்கோள் படம்	127
3.17	ஆய்வுப் பகுதியின் நிலப் பயன்பாடு/நில அட்டை வரைபடம்	131
3.18	ஆய்வுப் பகுதியின் கிராம வரைபடம்	135
3.19	பாலின வாரியான மக்கள் தொகை பரவல்	139
3.20	பாலின வாரியான எழுத்தறிவு	139
3.21	இடையக மண்டலத்திற்குள் தொழில் கட்டமைப்பு	140
3.22	நீரோடை வடிவம் வரைபடத்தின் 10 கிலோ மீட்டர் சுற்றளவு	142

3.23	புவியியல் வரைபடத்தின் 10 கிமீ சுற்றளவு	144
3.24	ஆய்வுப்பகுதியின் 10 கிமீ சுற்றளவு புவியியல் புறத்தோற்றம் வரைபடம்	145
3.25	ஆய்வுப் பகுதியின் 10 கிமீ சுற்றளவு மண் வகை வரைபடம்	146
3.26	ஆய்வுப் பகுதியின் பருவமழை அல்லாத நீர் நிலை வரைபடம்	147
3.27	ஆய்வுப்பகுதியின்மழைக்காலநீர்நிலைவரைபடம்	148
4.1	நீர் தேவை வரைபடம்	154
4.2	PM 2.5 க்கான GLC கணிப்பு ஐசோப்லெத்	162
4.3	PM10 க்கான GLC கணிப்பு ஐசோப்லெத்	163
4.4	GLC முன்கணிப்பின் ஐசோப்லெத் - PM2.5க்கான ஒட்டுமொத்த படம்	164
4.5	GLC முன்கணிப்பின் ஐசோப்லெத்–PM10 க்கான ஒட்டுமொத்த	165
7.1	PM 2.5 க்கான GLC கணிப்பு ஐசோப்லெத்	184
7.2	PM10 க்கான GLC கணிப்பு ஐசோப்லெத்	185
7.3	GLC முன்கணிப்பின் ஐசோப்லெத் - PM2.5க்கான ஒட்டுமொத்த படம்	186
7.4	GLC முன்கணிப்பின் ஐசோப்லெத்–PM10 க்கான ஒட்டுமொத்த	187
10.1	அமைப்பு விளக்கப்படம்	199

அட்டவணை பட்டியல்

அட்டவணை எண்.	தலைப்பு	பக்க எண்
1.1	கிளஸ்டர் சுரங்க விவரங்கள்	67
1.2	முன்மொழியப்பட்ட திட்ட விவரங்கள்	70
2.1	திட்டத்தின் கிளஸ்டர் சுரங்க விவரங்கள்	74
2.1a	திட்டத்தின் முக்கிய அம்சங்கள்	75
2.2	திட்டத்தின் எல்லை ஒருங்கிணைப்புகள்	76
2.3	தற்போதைய நில பயன்பாட்டு முறை	80
2.4	சுரங்கம் மூடும் கட்டத்தில் நிலபயன்பாடு	80
2.5	சட்டரீதியான அனுமதிகள், அனுமதிகள், என்ஓசி, ஒப்புதல்களின் நிலை	83
2.6	ஒப்புதலுக்கான முன்மொழியப்பட்ட அட்டவணை	84
2.7	தண்ணீர் தேவை	85
2.8	திட்டத்தில் ஈடுபட உள்ள இயந்திரங்கள்	86
2.9	சுரங்க விவரங்கள்	91
2.10	5 ஆண்டுகளுக்கு உற்பத்தியின் சுருக்கம்	93
2.11	இறுதிநிலை குழி விவரம்	94
3.1	குத்தகை பகுதியின் விளக்கம்	100
3.2	மழைப்பொழிவு தரவு	108
3.3	சுற்றுப்புற காற்றின் தரக்கண்காணிப்பு இடங்களின் விவரங்கள்	110
3.4	6 இடங்களில் காற்று மாதிரி பகுப்பாய்வின் முடிவுகள்	112
3.5	நீர் மாதிரி இடங்கள்	117
3.6	மேற்பரப்பு நீர் பகுப்பாய்வு முடிவுகள்	119
3.7	நிலத்தடி நீர் பகுப்பாய்வு முடிவுகள்	120
3.8	இரைச்சல் கண்காணிப்பு முடிவுகள்	122
3.9	மண் மாதிரி பகுப்பாய்வின் முடிவுகள்	124
3.10	மையமண்டலத்தில் உள்ள தாவரங்கள்	125
3.11	தாங்கல் மண்டலத்தில் உள்ள தாவரங்கள்	125
3.12	தாங்கல் மண்டலத்தில் விலங்கினங்கள்	126
3.13	முக்கிய நில பயன்பாட்டு அலகுகள்	129
3.14	சதவீதத்தில் ஆய்வுப் பகுதியின் முக்கிய நில பயன்பாட்டு அலகுகள்	134
3.15	ஆய்வு பகுதியில் உள்ள கிராம விவரங்கள்	136
3.16	ஆய்வுப் பகுதியின் மக்கள்தொகை விவரம்	138
3.17	கல்வி உள்கட்டமைப்பு	140
3.18	மருத்துவ உள்கட்டமைப்பு	141

3.19	பிற உள்கட்டமைப்பு	141
4.1	நிலத்தடி நீர் நிலை	155
4.2	விலங்கினங்களுக்கான தாக்கங்கள் மற்றும் தணிப்பு நடவடிக்கைகள்	156
4.3	திட்டம் செயல் படுத்தப்பட்ட பிறகு PM2.5 செறிவுகள்	166
4.3.a	திட்ட அமலாக்கத்திற்குப் பிறகு PM2.5 இன் கிளஸ்டர் செறிவுகள்	166
4.3.b	திட்டம் செயல் படுத்தப்பட்ட பிறகு PM210 செறிவுகள்	166
4.3.c	திட்ட அமலாக்கத்திற்குப் பிறகு PM10 இன் கிளஸ்டர் செறிவுகள்	167
4.4	கண்காணிப்பு இடங்களில் இரைச்சல் நிலைகள்	168
4.5	பல்வேறு சுரங்க நடவடிக்கைகளால் மனிதர்களுக்கு ஏற்படும் பாதிப்புகள்	171
6.1	சுற்றுச்சூழல் கண்காணிப்பு அட்டவணை	176
6.2	PP ஆல் பராமரிக்கப்பட வேண்டிய முக்கியமான பதிவுகள்	178
6.3	சுற்றுச்சூழல் மேலாண்மை திட்ட பட்ஜெட்	178
7.1	ஆபத்துகள் மற்றும் முன்னெச்சரிக்கை நடவடிக்கைகள்	180
7.2	500மீ சுற்றளவில் உள்ள குவாரிகளின் விவரங்கள் (500மீ சான்றிதழின்படி)	181
7.3 & 7.3a	திட்ட அமலாக்கத்திற்குப் பிறகு PM 2.5 இன் செறிவுகள் (முன்மொழியப்பட்ட சுரங்கத் தளம் & கிளஸ்டர்)	188
7.4 & 7.4a	திட்டம் செயல்படுத்தப்பட்ட பிறகு PM 10 இன் செறிவுகள் (முன்மொழியப்பட்ட சுரங்கத் தளம் & கிளஸ்டர்)	189
7.5	போக்குவரத்து பாதிப்பு	190
10.1	சுற்றுச்சூழல் மேலாண்மை திட்டம்	196
10.2	சுற்றுச்சூழல் மேலாண்மை திட்ட செலவு	201
11.1	குத்தகை பகுதியின் விளக்கம்	206
11.2	சுற்றுப்புற காற்றின் தரக்கண்காணிப்பு இடங்களின் விவரங்கள்	208
11.3	இடங்களில் நிலத்தடி நீர் மாதிரி பகுப்பாய்வு முடிவுகள்	209
11.4	இரைச்சல் கண்காணிப்பு முடிவுகள்	210
11.5	மண்மாதிரிபகுப்பாய்வின்முடிவுகள்	210
11.6	ஆய்வுப் பகுதியின் முக்கிய நில பயன்பாட்டு அலகுகள் சதவீதத்தில்	211

இணைப்புகளின் பட்டியல்

வ.எண்	உள்ளடக்கம்	இணைப்பு எண்
1	குறிப்பு விதிமுறைகள் (ToR)	1
2	துல்லியமான பகுதி தொடர்பு கடிதம்	2
3	சுரங்கத் திட்டம் மற்றும் படங்கள் அங்கீகரிக்கப்பட்டது	3
4	500 மீட்டர் சுற்றளவு கடிதம்	4
5	VAO சான்றிதழ்	5
6	நில ஆவணம்	6
7	மாவட்ட ஆய்வு அறிக்கை	7
8	கண்காணிப்பு அறிக்கை	8
9	ஆய்வக NABL சான்றிதழ்	9
10	திட்டத்தின் 500மீ சுற்றளவில் அமைந்துள்ள கட்டமைப்புகள்	10
11	காடு மற்றும் சரணாலயங்களைக் காட்டும் 10 கிமீ வரைபடம்	11
12	வாக்குமூலம்	12
13	CER கடிதம்	13

குறிப்பு விதி முறைகளின் இணக்கம்

வ. எண்	ToR புள்ளிகள்	பதில்	பக்க. எண்
1	**SEIAA இன் குறிப்பிட்ட நிபந்தனைகள்**		
1.1	விரிவான விவாதங்களுக்குப் பிறகு, SEAC இன் பரிந்துரையை ஆணையம் ஏற்றுக்கொண்டு, முடிவு செய்தது SEAC பரிந்துரைத்த நிபந்தனைகளுக்கு உட்பட்டு, MoEF & CC மற்றும் குறிப்பிட்ட மற்றும் நிலையான நிபந்தனைகளுக்கு உட்பட்டு, ஒருங்கிணைந்த சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆய்வு மற்றும் தனியான சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தைத் தயாரிப்பதற்கான கிளஸ்டரின் கீழ் பொது விசாரணையுடன் குறிப்பு விதிமுறைகள் (ToR) . i) திட்டப் பகுதியைச் சுற்றி அமைந்துள்ள நீர்நிலைகளைக் கருத்தில் கொண்டு, தரை மட்டத்திலிருந்து 33 மீட்டர் ஆழத்திற்கு குறிப்பு விதிமுறைகள் வழங்கப்பட்டுள்ளன. திருத்தப்பட்ட சுரங்கத் திட்டத்தை முன்மொழிபவர் அதற்கேற்ப வழங்க வேண்டும்..	இறுதி EIA இன் போது, திருத்தப்பட்ட சுரங்கத் திட்டம் (தரைமட்டத்திற்கு கீழே 33 மீ வரை) சமர்ப்பிக்கப்படும்.	
2	**SEAC இன் குறிப்பிட்ட நிபந்தனைகள்**		
2.1	சட்டப்பூர்வ பணியாளர்களை நியமித்தல், தகுந்த சுற்றுச்சூழல் கண்காணிப்பு, சரக்குகளை நல்ல முறையில் பராமரித்தல் ஆகியவற்றுடன் முறையான மற்றும் அறிவியல் அணுகுமுறையின் மூலம் கிளஸ்டரில் உள்ள சுரங்க நடவடிக்கைகளை திறம்பட நிர்வகிப்பதற்கு குழு உறுப்பினர்களாக	ஒப்புக்கொண்டார்	

	கிளஸ்டரில் உள்ள அனைத்து சுரங்கங்களையும் சேர்த்து ஒரு கிளஸ்டர் மேலாண்மை குழு (CMC) அமைக்கப்படும். சாலைகள் மற்றும் கிராமம் / ஊராட்சி சாலைகள், அங்கீகரிக்கப்பட்ட வெடிப்பு நடவடிக்கை போன்றவை. EIA மதிப்பீட்டின் போது PP பின்வரும் விவரங்களை உறுதிமொழி வடிவத்தில் சமர்ப்பிக்க வேண்டும்: (i) CMC உருவாக்கும் ஒப்பந்தத்தின் நகல். (ii)உறுப்பினர்களின் பங்கை வரையறுக்கும் குழுவின் அமைப்பு விளக்கப்படம் (iii) திட்டமிட்ட செயல்பாடுகளைச் செயல்படுத்தும் 'நிலையான செயல்பாட்டு நடைமுறைகள்' (SoP).		
2	குத்தகை அமலாக்கத்தின் போது, மத்திய மின்சார ஆணையத்தின் அறிவிப்பு எண். CEA-PS-16/1/2021-CEI பிரிவு dt 08.07.2023 இன் விதிகளின் கீழ் தகுதிவாய்ந்த அதிகாரியிடமிருந்து NOC முன்மொழிபவர் பெற வேண்டும்.	ஒப்புக்கொண்டார்	
3	நீர்நிலைகள் அருகிலேயே அமைந்திருப்பதால், நிலத்தடி நீர் நிலைகளில் சுரங்க நடவடிக்கையின் தாக்கங்களைத் தீர்மானிக்க குவாரியின் நீர்நிலை நிலையை மதிப்பிடுவதற்கான அறிவியல் ஆய்வுகளை PP மேற்கொள்ளும்.	ஒரு புகழ்பெற்ற நிறுவனத்தில் இருந்து ஹைட்ரோஜியோலாஜிகல் ஆய்வு நடந்து கொண்டிருக்கிறது; இருப்பினும், இறுதி EIA சமர்ப்பிப்பு அறிக்கை அத்தியாயம் 7 இல் இணைக்கப்படும்.	

4	முன்மொழிபவர் (i) 50 மீ, (ii) 100 மீ, (iii) 200 மீ மற்றும் (iv) 300 மீ (v) 500 மீ சுற்றளவில் அமைந்துள்ள கட்டமைப்புகளைக் கணக்கெடுத்து கணக்கிடுமாறு கேட்டுக் கொள்ளப்படுகிறார். வசிப்பவர்களின் எண்ணிக்கையுடன் கூடிய குடியிருப்பு வீடுகள், அது உரிமையாளருடையதா (அல்லது) இல்லையா, வழிபாட்டுத் தலங்கள், தொழிற்சாலைகள், தொழிற்சாலைகள் கொட்டகைகள் போன்றவை கட்டிடத்தின் உரிமையாளரைக் குறிக்கும் விவரங்கள், கட்டுமானத்தின் தன்மை, கட்டிடத்தின் வயது, எண் குடியிருப்பாளர்களின், அவர்களின் தொழில் மற்றும் வருமானம் போன்றவை	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் இணைப்பில் 5-இணைப்பாக கொடுக்கப்பட்டுள்ளது.	
5	திட்ட ஆதரவாளர் வேலிகள், மரங்களை நடுதல், கட்டப்பட்ட மழை வடிகால் வண்டல் தொட்டி மற்றும் பச்சை வளையம் ஆகியவற்றின் புகைப் படங்களை வழங்க வேண்டும்; அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்தின்படி அருகிலுள்ள குவாரிகள் மற்றும் அருகிலுள்ள நீர்நிலைகளுக்கு இடையே பாதுகாப்பு தூரத்தை பராமரித்தல் வேண்டும்.	குவாரி குத்தகை விண்ணப்பித்த பகுதியில் மரங்கள் இல்லை. வேலி மற்றும் மரங்கள் நடும் பணிகள் நடைபெற உள்ளன. பாதுகாப்பு மண்டலப் பகுதியில் தாவர வளர்ச்சி மற்றும் அழகியலை மேம்படுத்த பாதுகாப்பு மண்டலத்தில் பசுமைப் வலயம் / தோட்டம் மேற்கொள்ளப்படும். சுரங்கத்திற்குப் பிந்தைய கட்டத்தில், 0.86.00 ஹெக்டேர் பரப்பளவு பசுமை மற்றும் தோட்டத்தின் கீழ் இருக்கும்.	
6	முன்மொழிபவர் EIA ஆய்வின் ஒரு பகுதியாக உயிரியல் பன்முகத்தன்மை ஆய்வை மேற்கொண்டு மற்றும் அது அறிக்கையில் சேர்க்கப்பட வேண்டும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-4 இல் கொடுக்கப்பட்டுள்ளது.	

7	முன்மொழிபவர் குவாரி குத்தகை காலம் முழுமைக்கும் அதாவது 10 வருடம் EMP ஐ தயார் செய்யும், மேலும் குவாரி குத்தகை காலம் முழுவதும் EMP கடைபிடிப்பதாக உறுதிமொழி அளித்த உறுதிமொழியையும் ஆவணம் அளிக்க வேண்டும்.	ஒப்புக்கொண்டார். கடைபிடிக்கப்படும்.	
8	முன்மொழியப்பட்ட சுரங்க குத்தகைப் பகுதியில் ஒரு 'குழி' இருப்பது தொடர்பான பிரமாணப் பத்திரத்தை முன்மொழிபவர் அளிக்க வேண்டும்.	ஒப்புக்கொண்டார். கடைபிடிக்கப்படும்.	
9	தற்போதுள்ள மற்றும் முன்மொழியப்பட்ட குவாரிகளின் ஒட்டுமொத்த சுற்றுச்சூழல் பாதிப்புகள் பற்றிய விரிவான ஆய்வுகளை முன்மொழிபவர் மேற்கொள்ள வேண்டும், இதில் தோண்டுதல் மற்றும் வெடித்தல், ஏற்றுதல் மற்றும் சுற்றியுள்ள கிராமம் மற்றும் கட்டமைப்புகள் ஆகியவை அடங்கும்.	ஒப்புக்கொண்டார். கடைபிடிக்கப்படும்.	
3	**SEAC இன் நிலையான நிபந்தனைகள்**		
1	தற்போதுள்ள/செயல்படும் சுரங்கங்களின் விஷயத்தில், சம்பந்தப்பட்ட AD (சுரங்கங்கள்) இலிருந்து பெறப்பட்ட ஒரு கடிதம் சமர்ப்பிக்கப்பட வேண்டும் மற்றும் அதில் பின்வருவன அடங்கும். i. அசல் குழி அளவு ii. தோண்டபட்ட அளவு Vs EC அங்கீகரிக்கப்பட்ட அளவு iii. கணக்கிடப்பட்ட கையிருப்பு இருப்பின் படி இருப்பு அளவு. iv. தோண்டபட்ட ஆழம் Vs தேதியின்படி அனுமதிக்கப்பட்ட ஆழம் v. சட்டவிரோத/சட்டவிரோத சுரங்கம் பற்றிய விவரங்கள்	இது ஏற்கனவே குழி உள்ளது. AD/DD சுரங்க விவரங்கள் இறுதி EIA & EMP இல் இணைக்கப்படும்.	

	vi. கடந்த பணியின் போது குவாரியில் விதிமீறல். vii. சுரங்க குத்தகை பகுதிக்கு வெளியே வெட்டப்பட்ட பொருட்களின் அளவு viii. பாதுகாப்பு மண்டலம்/பெஞ்சுகளின் நிலை ix. திருத்தப்பட்ட / மாற்றியமைக்கப்பட்ட சுரங்கத் திட்டம் 6 மீ உயரத்திற்கு மிகாமல் மற்றும் இறுதி ஆழம் 50 மீட்டருக்கு மிகாமல் இருப்பதைக் காட்டுகிறது.		
2	முன்மொழியப்பட்ட சுரங்கப் பகுதியைச் சுற்றியுள்ள குடியிருப்புகளின் விவரங்கள் மற்றும் தளத்தின் சுற்றளவில் இருந்து 300மீ சுற்றளவுக்குள் குடியிருப்புகள் அமைந்துள்ள இடம் குறித்த சமீபத்திய VAO சான்றிதழ்.	VAO விடமிருந்து பெறப்பட்ட கடிதம் இணைப்பு - 5ஆக இணைக்கப்பட்டுள்ளது.	
3	முன்மொழிபவர் (i) 50 மீ, (ii) 100 மீ, (iii) 200 மீ மற்றும் (iv) 300 மீ (v) 500 மீ சுற்றளவில் அமைந்துள்ள கட்டமைப்புகளைக் கணக்கெடுத்து கணக்கிடுமாறு கேட்டுக் கொள்ளப்படுகிறார். வசிப்பவர்களின் எண்ணிக்கையுடன் கூடிய குடியிருப்பு வீடுகள், அது உரிமையாளருடையதா (அல்லது) இல்லையா, வழிபாட்டுத் தலங்கள், தொழிற்சாலைகள், தொழிற்சாலைகள் கொட்டகைகள் போன்றவை கட்டிடத்தின் உரிமையாளரைக் குறிக்கும் விவரங்கள், கட்டுமானத்தின் தன்மை, கட்டிடத்தின் வயது, எண் குடியிருப்பாளர்களின், அவர்களின் தொழில் மற்றும் வருமானம் போன்றவை	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் இணைப்பில் 4-இணைப்பாக கொடுக்கப்பட்டுள்ளது.	

4	முன்மொழியப்பட்ட குவாரியி லிருந்து 1 கிமீ தொலைவில் அமைந்துள்ள ஏரி, குளங்கள் போன்ற நீர்நிலைகளில் முன்மொழியப்பட்ட குவாரி நடவடிக்கைகளின் தாக்கத்தை சுட்டிக்காட்டும் விரிவான நீரியல் அறிக்கையை PP சமர்ப்பிக்க வேண்டும்.	ஆய்வு நடந்து வருகிறது. இது இறுதி EIA & EMP இல் இணைக்கப்படும்.	
5	முன்மொழிபவர் புகழ்பெற்ற நிறுவனம் மூலம் உயிரியல் பன்முகத்தன்மை ஆய்வை மேற்கொள்வார் மற்றும் அது EIA அறிக்கையில் சேர்க்கப்படும்.	இணங்கியது. ஆய்வுப் பகுதியின் பல்லுயிர் அறிக்கை இறுதி EIA சமர்ப்பிப்பின் போது வழங்கப்படும்.	
6	DFO கடிதம், ரிசர்வ் காடுகள், பாதுகாக்கப்பட்ட பகுதிகளின் அருகாமை தூரம், சரணாலயங்கள், புலிகள் காப்பகம் போன்றவை, உத்தேசிக்கப்பட்ட இடத்திலிருந்து 25 கிமீ சுற்றளவு வரை.	இறுதி EIA/EMP அறிக்கையில் RF & PF இன் அருகாமை தூரம் DFO கடிதம் மூலம் வழங்கப்படும்.	
7	ஏற்கனவே உள்ள (அல்லது பழைய) குவாரியில் குத்தகைக்கு முன்மொழியப்பட்ட வழக்கில், அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்தின்படி பெஞ்சுகள் உருவாக்கப்படாத (அல்லது) பகுதியளவு உருவாக்கப்படும் போது, திட்ட ஆதரவாளர் (PP) அறிவியல் ஆய்வுகளை மேற்கொள்ள வேண்டும். பணிபுரியும் பெஞ்சுகளின் சரிவு நிலைத்தன்மை மற்றும் தற்போதுள்ள குவாரி சுவர், புகழ்பெற்ற ஆராய்ச்சி மற்றும் கல்வி நிறுவனங்களில் ஏதேனும் ஒன்றை உள்ளடக்கியதன் மூலம் - CSIR-மத்திய சுரங்க மற்றும் எரிபொருள் ஆராய்ச்சி நிறுவனம் / தன்பாத், NIRM/பெங்களூரு,	-	

	ஜியோடெக்னிகல் இன்ஜினியரிங் பிரிவு IIT-Madras, NIT-Dept of Mining Engg, Surathkal, and Anna University Chennai CEG Campus. EC ஐப் பெறுவதற்கான மதிப்பீட்டின் போது குவாரிச் சுவரின் நிலைதன்மை நிலை மற்றும் சாத்தியமான தணிப்பு நடவடிக்கைகள் ஆகியவற்றைக் குறிக்கும் மேற்கூறிய அறிக்கையின் நகலை PP சமர்ப்பிக்க வேண்டும்.		
8	எவ்வாறாயினும், புதிய குவாரிகளின் விஷயத்தில், முன்மொழியப்பட்ட குவாரிக்கான ஒரு கருத்தியல் 'சாய்வு நிலைப்புத் திட்டத்தை' முன்மொழிபவர் சமர்பிக்க வேண்டும், மதிப்பீட்டின் போது EC ஐப் பெறும்போது, பணியின் ஆழம் தரை மட்டத்திலிருந்து 30 மீட்டருக்கு அப்பால் நீட்டிக்கப்படும்.	EC மதிப்பீட்டின் போது இது இணைக்கப்படும்	
9	MMR 1961 இன் படி, முன்மொழியப்பட்ட குவாரியில் வெடி வெடித்தல் நடவடிக்கையானது, முன்மொழிபவரால் நியமிக்கப்பட்ட பிளாஸ்டர் மைனிங் மேட் மைன் ஃபோர்மேன், IIII வகுப்பு சுரங்க மேலாளர் போன்ற சட்டப்பூர்வ திறமையான நபரால் மேற்கொள்ளப்படுகிறது என்று PP உறுதிமொழியை அளிக்க வேண்டும்.	ஒப்பந்தம் இணைக்கப்பட்டுள்ளது	
10	முன்மொழியப்பட்ட குவாரியில் லைன் டிரில்லிங் மற்றும் மஃபிள் பிளாஸ்டிங் ஆகியவற்றை உள்ளடக்கிய கட்டுப்படுத்தப்பட்ட வெடிக்கும் நடவடிக்கையை மட்டுமே மேற்கொள்வதற்கான கருத்தியல் வடிவமைப்பை PP முன்வைக்கும்,	ஒப்பு கொள்ளபட்டது கடை பிடிக்கப்படும்.	

	அதாவது வெடிப்பு தூண்டப்பட்ட நில அதிர்வுகள் கட்டுப்படுத்தப்படும் மற்றும் வெடிப்பு நடந்த இடத்திலிருந்து 30 மீட்டருக்கு அப்பால் பறக்கும் பாறைகள் பயணிக்கக்கூடாது.		
11	EIA ஒருங்கிணைப்பாளர்கள், கடந்த காலத்தில் அதே இடத்தில் அல்லது மாநிலத்தில் வேறு இடங்களில் முன்மொழிபவரால் நடத்தப்பட்ட குவாரி/குவாரிகளின் விவரங்களை வீடியோ மற்றும் புகைப்பட ஆதாரங்களுடன் பெற்று அளிக்க வேண்டும்.	இந்த விவரங்கள் இறுதி EIA சமர்ப்பிப்பின் போது சமர்பிகபடும்.	
12	15.01.2016க்குப் பிறகு முன்மொழியப்பட்ட சுரங்கக் குத்தகைப் பகுதியில் சுரங்க நடவடிக்கையை முன்மொழிபவர் ஏற்கனவே மேற்கொண்டிருந்தால், முன்மொழிபவர் AD/DD, சுரங்கங்களில் இருந்து பின்வரும் விவரங்களை அளிக்க வேண்டும்.	இந்த விவரங்கள் இறுதி EIA சமர்ப்பிப்பின் போது சமர்பிகபடும்..	
13	AD/DD சுரங்கங்களால் வழங்கப்பட்ட கடைசி பணி அனுமதியுடன் முந்தைய சுரங்கங்களின் செயல்பாடு மற்றும் நிறுத்தத்தின் காலம் என்ன?	இது ஏற்கனவே குழி உள்ளது. AD/DD சுரங்க விவரங்கள் இறுதி EIA & EMP இல் இணைக்கப்படும்.	
14	வெட்டியெடுக்கப்பட்ட கனிமங்களின் அளவு. • ஒரு வருடத்தில் அதிகபட்ச உற்பத்தியை எட்டியது • சுரங்கத்தின் அங்கீகரிக்கப்பட்ட ஆழத்தின் விவரம். • முன்பு அடையப்பட்ட சுரங்கத்தின் உண்மையான ஆழம்.	இது ஏற்கனவே குழி உள்ளது. AD/DD சுரங்க விவரங்கள் இறுதி EIA & EMP இல் இணைக்கப்படும்.	

	• அந்த குத்தகை பகுதியில் ஏற்கனவே வெட்டியெடுக்கப்பட்ட நபரின் பெயர். • EC மற்றும் CTO ஏற்கனவே பெற்றிருந்தால், அதன் நகல் சமர்ப்பிக்கப்படும். • அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்தின்படி (அல்லது EC வழங்கப்பட்டால்) நிர்ணயிக்கப்பட்ட பெஞ்சுகளுடன் சுரங்கம் மேற்கொள்ளப்பட்டதா.		
15	சுரங்க குத்தகைப் பகுதியின் அனைத்து கம்மர் ஆயத்தொகுப்புகளும், உயர்-தெளிவு இமேஜரி/டோபோ ஷீட், டோபோகிராஃபிக் ஷீட் ஜியோமார்பாலஜி, லித்தாலஜி மற்றும் சுரங்க குத்தகைப் பகுதியின் புவியியல் ஆகியவற்றில் மிகைப்படுத்தப்பட்டவை வழங்கப்பட வேண்டும். முன்மொழியப்பட்ட பகுதியின் அத்தகைய படம் நில பயன்பாடு மற்றும் ஆய்வுப் பகுதியின் (கோர் மற்றும் பஃபர் மண்டலம்) பிற சுற்றுச்சூழல் அம்சங்களை தெளிவாகக் காட்ட வேண்டும்.	திட்ட ஒருங்கிணைப்புகள் செயற்கைக்கோள் படங்களில் மிகைப்படுத்தப்பட்டு, அத்தியாயம் - 2 இல் படம் எண் - 2.1 ஆக கொடுக்கப்பட்டுள்ளது. புவியியல் மற்றும் புவியியல் புறத்தோற்றம் வரைபடம் படம் எண்.3.23, 3.24 அத்தியாயம் 3 இல் வழங்கப்பட்டுள்ளது. மண் வரைபடம் படம் எண். 3.25, அத்தியாயம்-3-ன் கீழ் கொடுக்கப்பட்டுள்ளது. கோர் மற்றும் பஃபர் மண்டலம் காட்டும் 10 கிமீ சுற்றளவில் அட்டவணைத் திட்டம் அத்தியாயம் - 3 இல் படம் எண்.3.1 & படம் 3.2 இல் கொடுக்கப்பட்டுள்ளது.	
16	க்ளஸ்டர், கிரீன் பெல்ட், ஃபென்சிங் போன்றவற்றை உள்ளடக்கிய ட்ரோன் வீடியோ சர்வேயை PP மேற்கொள்ளும்.	அதற்கான பணிகள் நடைபெற்று வருகின்றன. இந்த விவரங்கள் இறுதி EIA சமர்ப்பிப்பின் போது சமர்பிகபடும்.	

17	அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்தின்படி, தற்போதுள்ள மரங்களை மீண்டும் நடுதல் மற்றும் அருகிலுள்ள குவாரிகள் மற்றும் நீர்நிலைகளுக்கு இடையே உள்ள பாதுகாப்பு தூரம் உள்ளிட்ட சுற்றளவில் போதுமான வேலிகள், பச்சை பெல்ட் ஆகியவற்றின் புகைப்படங்களை ஆதரவாளர் வழங்க வேண்டும்.	குவாரி பகுதியில் மரங்கள் இல்லை. வேலி மற்றும் மரங்கள் நடும் பணிகள் செய்யப்படவுள்ளது. பாதுகாப்பு மண்டலப் பகுதியில் தாவர வளர்ச்சி மற்றும் அழகியலை மேம்படுத்த பாதுகாப்பு மண்டலத்தில் பசுமைப் பட்டை / தோட்டம் மேற்கொள்ளப்படும். சுரங்கத்திற்குப் பிந்தைய கட்டத்தில், 0.86.0 ஹெக்டேர் பரப்பளவு மரங்கள் நடப்பட்டு இருக்கும்.	
18	திட்ட ஆதரவாளர் கனிம இருப்புக்கள் மற்றும் சுரங்க இருப்புக்கள், திட்டமிடப்பட்ட உற்பத்தி திறன், முன்மொழியப்பட்ட வேலை முறை, நியாயப்படுத்துதல், சுரங்க நடவடிக்கைகளால் சுற்றியுள்ள சூழலில் எதிர்பார்க்கப்படும் பாதிப்புகள் மற்றும் அதற்கான தீர்வு நடவடிக்கைகள் ஆகியவற்றை வழங்க வேண்டும்.	புவியியல் இருப்புக்கள் 21,37,500 கனமீட்டர் சாதாரண கல் மற்றும் 1,42,500 கனமீட்டர் கிராவல். தோண்டக் கூடிய இருப்புக்கள். 10,15,275கனமீட்டர் சாதாரண கல் மற்றும் 96,210கனமீட்டர் கிராவல்.	
19	சுரங்கச் சட்டம்' 1952 மற்றும் MMR, 1961 இன் விதிகளின்படி நியமிக்கப்பட வேண்டிய பல்வேறு சட்டப்பூர்வ அதிகாரிகள் மற்றும் பிற திறமையான நபர்களை நியமிப்பதைக் குறிக்கும் நிறுவன விளக்கப்படத்தை திட்ட ஆதரவாளர் வழங்க வேண்டும். பாதுகாப்பு மற்றும் சுற்றுச்சூழலை பாதுகாக்க.	இணங்கியது. படம் 10.1 ஐ பார்க்கவும்	

20	திட்ட முன்மொழிபவர் ஹைட்ரோ ஜியோலாஜிகல் ஆய்வை மேற்கொள்வதன் மூலம், நிலத்தடி நீர் மற்றும் திறந்தவெளி கிணறுகள் மற்றும் மேற்பரப்பு நீர்நிலைகளான ஆறுகள், கால்வாய்கள், குளங்கள் போன்றவற்றின் எண்ணிக்கையை விவரிக்கும் நீர்மட்ட வரைபடத்தைக் கருத்தில் கொண்டு 1 கிமீ (ஆரம்) சுரங்க நடவடிக்கைகளால் கிணறுகளில் ஏற்படும் பாதிப்புகளை மதிப்பிடுவதற்காக PWD / TWAD இலிருந்து பருவமழை மற்றும் பருவமழை அல்லாத பருவங்களுக்கு சேகரிக்கப்பட்ட நீர் நிலை தரவுகளுடன். உண்மையான கண்காணிக்கப்பட்ட தரவுகளின் அடிப்படையில், வேலை செய்வது நிலத்தடி நீரில் குறுக்கிடுமா என்பது தெளிவாகக் காட்டப்படலாம். இது சம்பந்தமாக தேவையான தரவு மற்றும் ஆவணங்கள் வழங்கப்படலாம்.	ஒரு புகழ்பெற்ற நிறுவனத்தில் இருந்து ஹைட்ரோஜியோலாஜிகல் ஆய்வு நடந்து கொண்டிருக்கிறது; இருப்பினும், இறுதி EIA சமர்ப்பிப்பு அறிக்கை அத்தியாயம் 7 இல் இணைக்கப்படும்..	
21	மேற்பரப்பு நீர்/நிலத்தடி நீரின் தரம், காற்றின் தரம், மண்ணின் தரம் மற்றும் போக்குவரத்து/வாகன இயக்கம் ஆய்வு உட்பட தாவரங்கள்/விலங்குகள் தொடர்பான சுற்றுச்சூழல் மற்றும் சுற்றுச்சூழல் அளவுருக்களுக்கான அடிப்படைத் தரவை முன்மொழிபவர் அளிக்க வேண்டும்.	அனைத்து சூழல்களுக்கான அடிப்படைத் தரவுகள் கோடை காலத்திற்காக (மார்ச் முதல் மே 2024 வரை) சேகரிக்கப்படுகின்றன.	
22	மண் ஆரோக்கியம், பல்லுயிர் பெருக்கம், காற்று மாசுபாடு, நீர் மாசுபாடு, காலநிலை மாற்றம் மற்றும் வெள்ளக் கட்டுப்பாடு மற்றும் சுகாதார	விரிவான ஒட்டுமொத்த தாக்க ஆய்வு மேற்கொள்ளப்பட்டு, அது அத்தியாயம் 4 இல் இணைக்கப்பட்டுள்ளது.	

	பாதிப்புகள் ஆகியவற்றின் அடிப்படையில் குறிப்பிட்ட சுற்றுச்சூழலைக் குறிப்பிட்டு குவாரியில் மேற்கொள்ளப்படும் சுரங்க நடவடிக்கைகளால் ஒட்டுமொத்த தாக்க ஆய்வை முன்மொழிபவர் மேற்கொள்ள வேண்டும். அதன்படி, சம்பந்தப்பட்ட குவாரி மற்றும் சுற்றுப்புற குடியிருப்புகளை மனதில் வைத்து சுற்றுச்சூழல் மேலாண்மை திட்டம் தயாரிக்கப்பட வேண்டும்.	அதன்படி, காற்று, நீர், இரைச்சல் மற்றும் மண் சூழல் ஆகியவற்றைக் கருத்தில் கொண்டு விரிவான சுற்றுச்சூழல் மேலாண்மைத் திட்டம் தயாரிக்கப்பட்டு, அத்தியாயம் 7ல் விவரங்கள் கொடுக்கப்பட்டுள்ளன.	
23	மழை நீர் சேகரிப்பு மேலாண்மை, நீர் இருப்பு (மழைக்காலம் மற்றும் பருவமழை அல்லாத இரண்டும்) உடன் ரீசார்ஜ் செய்யும் விவரங்களுடன் சமர்ப்பிக்க வேண்டும்.	மழை நீர் சேகரிப்பு திட்டம் அத்தியாயம் 4 இல் கொடுக்கப்பட்டுள்ளது.	
24	வனப்பகுதி, விவசாய நிலம், மேய்ச்சல் நிலம், வனவிலங்கு சரணாலயம், தேசிய பூங்கா, விலங்கினங்களின் இடம்பெயர்ந்த பாதைகள், நீர்நிலைகள், மனித குடியிருப்புகள் மற்றும் பிற சுற்றுச்சூழல் அம்சங்களைக் குறிக்கும் ஆய்வுப் பகுதியின் நில பயன்பாடு குறிப்பிடப்பட வேண்டும். சுரங்க குத்தகைப் பகுதியின் நில பயன்பாட்டுத் திட்டம், செயல்பாட்டுக்கு முந்தைய, செயல்பாட்டு மற்றும் செயல்பாட்டுக்கு பிந்தைய கட்டங்களை உள்ளடக்கியதாக தயாரிக்கப்பட்டு சமர்ப்பிக்கப்பட வேண்டும். நில பயன்பாட்டு மாற்றம் ஏதேனும் இருந்தால், அதன் தாக்கம் கொடுக்கப்பட வேண்டும்.	குத்தகைப் பகுதியை ஆய்வு செய்ய செயற்கைக்கோள் படங்கள் பயன் படுத்தப் பட்டுள்ளன மற்றும் நிலப் பயன்பாடு பற்றிய விவரங்கள் அத்தியாயம் 3 இல் கொடுக்கப்பட்டுள்ளன.	

25	சுரங்க குத்தகைக்கு வெளியே உள்ள நிலப்பரப்பு தூரம், அதன் நில பயன்பாடு, R&R சிக்கல்கள் ஏதேனும் இருந்தால், சுரங்க குத்தகைக்கு வெளியே நிராகரிக்கப்பட்ட நிலத்தின் விவரங்கள் வழங்கப்பட வேண்டும்.	பொருந்தாது. இங்கு குவாரியில் கனிம மற்றும் மேற்புற கழிவுகள் எதுவும் உற்பத்தியாகவில்லை.	
26	சுரங்க நடவடிக்கைகளுக்கான நீதிமன்றக் கட்டுப்பாடுகளை ஈர்க்கும் திட்டப் பகுதிகள் 'முக்கியமாக மாசுபட்டவை' என அறிவிக்கப்பட்ட பகுதிகளுக்கு அருகாமையில் குறிப்பிடப்பட வேண்டும், மேலும் தேவைப்படும் இடங்களில், TMCB (அல்லது) துறை போன்ற பரிந்துரைக்கப்பட்ட அதிகாரிகளிடமிருந்து அனுமதிச் சான்றிதழ்கள். முன்மொழியப்பட்ட சுரங்க நடவடிக்கைகள் பரிசீலிக்கப்படும் வகையில் புவியியல் மற்றும் சுரங்கம் பாதுகாக்கப்பட வேண்டும் மற்றும் வழங்கப்பட வேண்டும்.	பொருந்தாது கடுமையான மாசுபட்ட பகுதிகளுக்கு அருகாமையில் இல்லை.	
27	திட்டத்தில் மேற்கொள்ள உத்தேசிக்கப்பட்டுள்ள நீர் பாதுகாப்பு நடவடிக்கைகள் பற்றிய விளக்கம் அளிக்கப்பட வேண்டும். திட்டத்தில் முன்மொழியப்பட்டுள்ள மழைநீர் சேகரிப்பு பற்றிய விவரங்கள் ஏதேனும் இருந்தால் வழங்கப்பட வேண்டும்.	இந்த குவாரியால் நீர் சூழலில் ஏற்படும் சுரங்க நடவடிக்கைகளின் தாக்கம் ஆய்வு செய்யப்பட்டு, தணிப்பு நடவடிக்கைகள் முன்மொழியப்பட்டுள்ளன. மழை நீர் சேகரிப்பு திட்டம் அத்தியாயம் 4 கொடுக்கப்பட்டுள்ளது.	

28	இத்திட்டத்தின் காரணமாக உள்ளூர் போக்குவரத்து உள்கட்டமைப்பில் ஏற்படும் தாக்கம் சுட்டிக்காட்டப்பட வேண்டும்.	உற்பத்தி மிகவும் குறைவாக உள்ளதால், 5/10 டன் அளவுள்ள சில டிரக்குகள் மட்டுமே போக்குவரத்துக்கு பயன்படுத்தப்படும். உள்ளூர் போக்குவரத்தில் போக்குவரத்தின் விளைவு மிகக் குறைவு.	
29	ஒரு மர ஆய்வு ஆய்வு (எண்கள், இனங்களின் பெயர், வயது, விட்டம் போன்றவை) சுரங்க குத்தகைக்கு பயன்படுத்தப்பட்ட பகுதி & 300 மீ இடையக மண்டலம் மற்றும் சுரங்க நடவடிக்கையின் போது அதன் மேலாண்மை ஆகிய இரண்டிலும் மேற்கொள்ளப்பட வேண்டும்.	திட்டப் பகுதியின் 300மீ இடையகப் பகுதிக்குள் மரங்கள் இல்லை.	
30	முன்மொழியப்பட்ட திட்டத்திற்கான விரிவான கண்ணிவெடி மூடல் திட்டம் EIA-/EMP அறிக்கையில் இடம் சார்ந்ததாக இருக்க வேண்டும்.	விரிவான சுரங்க மூடல் திட்டம் அத்தியாயம் 7 இல் கொடுக்கப்பட்டுள்ளது.	
31	முன்மொழியப்பட்ட இடத்திற்கு அருகில் உள்ள தாவரங்கள் மற்றும் விலங்கினங்கள் பற்றிய ஆய்வின் ஒரு பகுதியாக, EIA ஒருங்கிணைப்பாளர் உள்ளூர் மாணவர்களுக்கு உள்ளூர் தாவரங்கள் மற்றும் விலங்கினங்களைப் பாதுகாப்பதன் முக்கியத்துவத்தைப் பற்றி கல்வி கற்பிக்க முயல வேண்டும்.	ஏற்றுக்கொள்ளப்பட்டது. அது செய்யப்படும்.	
32	திட்டத்தைச் சுற்றியுள்ள பசுமைப் பட்டையின் நோக்கம், தப்பியோடிய உமிழ்வுகள், கார்பன் வரிசைப்படுத்துதல் ஆகியவற்றைக் கைப்பற்றுவது மற்றும் அழகியலை	விரிவான பச்சை வளையம் மேம்பாட்டுத் திட்டம் 0.86.0 ஹெக்டேர் பரப்பளவில் முன்மொழியப்பட்டுள்ளது. பசுமை மண்டல மேம்பாட்டுத் திட்டம் செய்யப்படவுள்ளது.	

	மேம்படுத்துவதோடு, உருவாக்கப்படும் சத்தத்தைக் குறைப்பதும் ஆகும். DFO, மாநில வேளாண் பல்கலைக் கழகத்துடன் கலந்தாலோசித்து பின் இணைப்பு-I இல் கொடுக்கப்பட்டுள்ளபடி, பரந்த அளவிலான உள்நாட்டு தாவர இனங்கள் நடப்பட வேண்டும். பூர்வீக தோற்றம் கொண்ட அடர்த்தியான/மிதமான விதானம் கொண்ட தாவர வகைகளைத் தேர்ந்தெடுக்க வேண்டும். புதர்களுடன் மாறி மாறி சிறிய/நடுத்தர/உயரமான மரங்களின் இனங்கள் கலந்த முறையில் நடப்பட வேண்டும்.		
33	உயரமான / ஒரு வயதுடைய மரக்கன்றுகள் பொருத்தமான அளவு பைகளில் வளர்க்கப்படுகின்றன; சுற்றுச்சூழலுக்கு உகந்த பைகளை உள்ளூர் வன அதிகாரிகள் / தாவரவியலாளர் / தோட்டக்கலை நிபுணர்களின் ஆலோசனையின்படி நடவு செய்ய வேண்டும். முன்மொழிபவர் குறைந்தபட்சம் 3 மீட்டர் அகலம் கொண்ட திட்டத் தளத்தின் எல்லையெங்கும் GPS ஆயத்தொலைவுகளுடன் பச்சை வளையம் பகுதியை ஒழுங்கமைக்கப்பட்ட முறையில் ஒதுக்க வேண்டும்.	ஏற்றுக்கொள்ளப்பட்டது. பச்சை வளையம் (மரங்கள் நடப்பட்ட பின்) புகைப்படங்கள் வழங்கப் படும்.	
34	முன்மொழியப்பட்ட குவாரியின் (அல்லது) குத்தகைக் காலம் முடியும் வரை, பேரிடர் மேலாண்மைத் திட்டம் தயாரிக்கப்பட்டு, EIA,/EMP அறிக்கையில் சேர்க்கப்பட வேண்டும்.	இந்த திட்டத்திற்கான பேரிடர் மேலாண்மை திட்டம் அத்தியாயம் 7 இல் வழங்கப்பட்டுள்ளது.	

35	முன்மொழியப்பட்ட குவாரியின் (அல்லது) குத்தகைக் காலம் முடியும் வரை, இடர் மதிப்பீடு மற்றும் மேலாண்மைத் திட்டம் தயாரிக்கப்பட்டு, EIA/EMP அறிக்கையில் சேர்க்கப்படும்.	திட்டத்திற்கான இடர் மதிப்பீட்டுத் திட்டம் அத்தியாயம் 7 இல் வழங்கப்பட்டுள்ளது.	
36	இந்தத் திட்டத்தின் தொழில்சார் சுகாதார பாதிப்புகள் எதிர்பார்க்கப்பட வேண்டும் மற்றும் முன்மொழியப்பட்ட தடுப்பு நடவடிக்கைகள் விரிவாக விவரிக்கப்பட வேண்டும். முன் வேலை வாய்ப்பு மருத்துவ பரிசோதனை மற்றும் காலமுறை மருத்துவ பரிசோதனை அட்டவணைகள் பற்றிய விவரங்கள் EMP இல் இணைக்கப்பட வேண்டும். சுரங்கப் பகுதியில் முன்மொழியப்பட்ட தேவையான வசதிகளுடன் கூடிய திட்டக் குறிப்பிட்ட தொழில்சார் சுகாதாரத் தணிப்பு நடவடிக்கைகள் விரிவாக இருக்கலாம்.	திட்டத்தின் தொழில்சார் சுகாதார பாதிப்புகள் மற்றும் தடுப்பு நடவடிக்கைகள் அத்தியாயம் 4 இல் விரிவாக விவாதிக்கப்பட்டுள்ளன.	
37	இத்திட்டத்தின் பொது சுகாதார தாக்கங்கள் மற்றும் பாதிப்பு மண்டலத்தில் உள்ள மக்களுக்கான தொடர்புடைய நடவடிக்கைகள் முறையாக மதிப்பீடு செய்யப்பட வேண்டும் மற்றும் முன்மொழியப்பட்ட தீர்வு நடவடிக்கைகள் பட்ஜெட் ஒதுக்கீடுகளுடன் விரிவாக விவரிக்கப்பட வேண்டும்.	குத்தகை பகுதியில் இருந்து 1 கி.மீ.க்கு மேல் கிராமங்கள் அமைந்துள்ளதால் பொது சுகாதாரத்தில் பெரிய பாதிப்பு இருக்காது. CER மற்றும் CSR பற்றிய விவரங்கள் அத்தியாயம் எண். 8ன் கீழ் விவாதிக்கப்பட்டுள்ளன.	
38	சமூக-பொருளாதார ஆய்வுகள் சுரங்க நடவடிக்கையிலிருந்து 5 கிமீ இடையக மண்டலத்திற்குள் மேற்கொள்ளப்பட வேண்டும். திட்ட ஆதரவாளரால் வழங்க முன்மொழியப்பட்ட உள்ளூர்	வருகைகள் மற்றும் இரண்டாம் நிலை தரவு சேகரிப்பு மூலம் சமூக பொருளாதார ஆய்வு நடத்தப்படுகிறது.	

	சமூகத்திற்கு சமூக-பொருளாதார முக்கியத்துவம் மற்றும் செல்வாக்கின் நடவடிக்கைகள் சுட்டிக்காட்டப்பட வேண்டும். முடிந்தவரை, செயல்படுத்துவதற்கான கால அளவுகளுடன் அளவு பரிமாணங்கள் கொடுக்கப்படலாம்.	அத்தியாயம் 3 இல் விவரங்கள் கொடுக்கப்பட்டுள்ளன.	
39	திட்டத்திற்கு எதிராக நிலுவையில் உள்ள வழக்குகளின் விவரங்கள், ஏதேனும் இருந்தால், திட்டத்திற்கு எதிராக ஏதேனும் நீதிமன்றத்தால் இயற்றப்பட்ட வழிகாட்டுதல் / உத்தரவுடன் கொடுக்கப்பட வேண்டும்.	இந்தத் திட்டத்துக்கு எதிராக எந்த நீதிமன்றத்திலும் வழக்கு நிலுவையில் இல்லை.	
40	திட்டம் செயல்படுத்தப்பட்டால், திட்டத்தின் பலன்கள் விவரிக்கப்பட வேண்டும். திட்டத்தின் பலன்கள், சுற்றுச்சூழல், சமூகம், பொருளாதாரம், வேலை வாய்ப்பு போன்றவற்றை தெளிவாகக் குறிக்கும்.	திட்டத்தின் நன்மைகள் அத்தியாயம் 8 இல் கொடுக்கப்பட்டுள்ளன.	
41	தற்போது EC கோரப்பட்டுள்ள உத்தேச குவாரி தளத்தில் ஏதேனும் குவாரி நடவடிக்கைகள் மேற்கொள்ளப்பட்டிருந்தால், திட்ட ஆதரவாளர் முந்தைய தேர்தல் ஆணையத்தில் கொடுக்கப்பட்ட EC நிபந்தனைகளுக்கு விரிவான இணக்கத்தை, MoEF&CC, பிராந்திய அலுவலகத்தால் முறையாக சான்றளிக்கப்பட்ட தள புகைப்படங்களுடன் அளிக்க வேண்டும். சென்னை (அல்லது) சம்பந்தப்பட்ட DEE/TNPCB.	இது ஏற்கனவே குழி உள்ளது. AD/DD சுரங்க விவரங்கள் இறுதி EIA & EMP இல் இணைக்கப்படும்.	

42	PP ஆனது குவாரி குத்தகை காலம் முழுமைக்கும் EMP ஐ தயார் செய்யும், மேலும் குவாரி குத்தகை காலம் முழுவதும் EMP ஐ கடைபிடிப்பதாக உறுதிமொழி அளித்த உறுதிமொழியையும் ஆவணம் அளிக்க வேண்டும்.	-	
43	எந்தவொரு உண்மைத் தகவலையும் மறைத்தல் அல்லது தவறான/புனையப்பட்ட தரவைச் சமர்ப்பித்தல் மற்றும் மேலே குறிப்பிட்டுள்ள நிபந்தனைகளுக்கு இணங்கத் தவறினால், சுற்றுச்சூழல் (பாதுகாப்பு) சட்டம், 1986 இல் தண்டனை விதிகளை ஈர்ப்பது தவிர, இந்த நிபந்தனைகளின் விதிமுறைகள் திரும்பப் பெறப்படலாம்.	ஒப்புக்கொண்டார்	
4.0	**கிளஸ்டர் மேனேஜ்மென்ட் கமிட்டி**		
1	கிளஸ்டர் மேனேஜ்மென்ட் கமிட்டி அமைக்கப்பட வேண்டும், அதில் ஏற்கனவே உள்ள மற்றும் முன்மொழியப்பட்ட குவாரி உட்பட கிளஸ்டரில் உள்ள அனைத்து ஆதரவாளர்களும் உறுப்பினர்களாக இருக்க வேண்டும்.	500 மீட்டர் சுற்றளவில் நான்கு குவாரிகள் உள்ளன. இந்த குவாரி மற்றும் பிற முன்மொழியப்பட்ட குவாரிக்கு சுற்றுச்சூழல் அனுமதி கிடைத்தவுடன் கிளஸ்டர் மேலாண்மை குழுவை அமைக்க முன்மொழிபவர் முன்முயற்சி எடுப்பார்.	
2	பசுமை மண்டல மேம்பாடு, தண்ணீர் தெளித்தல், மரம் வளர்ப்பு, வெடி வெடித்தல் போன்றவற்றை உள்ளடக்கிய EMP-ஐ திறம்பட செயல்படுத்த உறுப்பினர்கள் தங்களுக்குள் ஒருங்கிணைக்க வேண்டும்.	ஒப்புக்கொண்டார். அது கடைப்பிடிக்கப்படும்.	

3	அமைக்கப்பட்ட குழுவின் உறுப்பினர்களின் பட்டியல் சுரங்க குத்தகையை நிறைவேற்றுவதற்கு முன் AD/Mines க்கு சமர்ப்பிக்கப்படும் மற்றும் அது ஒவ்வொரு ஆண்டும் AD/Mines க்கு புதுப்பிக்கப்படும்.	ஒப்புக்கொண்டார். அமைக்கப்பட்ட குழுவின் உறுப்பினர்களின் பட்டியல் சுற்றுச்சூழல் அனுமதியைப் பெற்ற பிறகு உதவி இயக்குனர் / சுரங்கங்களுக்குச் சமர்ப் பிக்கப்படும்.	
4	விரிவான செயல்பாட்டுத் திட்டம் சமர்ப்பிக்கப்பட வேண்டும், அதில் கிளஸ்டரில் அமைந்துள்ள அருகிலுள்ள குவாரியைப் பொறுத்தமட்டில் வெடித்தல் அதிர்வெண், பாதை வரைபடம் மற்றும் நெட்வொர்க் வடிவில் தனிப்பட்ட குவாரியால் இழுத்துச் செல்லும் சாலைகளின் பயன்பாடு ஆகியவை அடங்கும்.	ஒப்புக்கொண்டார். கிளஸ்டர் பகுதியில் இந்த உத்தேச திட்டத்திற்கு சுற்றுச்சூழல் அனுமதி கிடைத்தவுடன், கிளஸ்டர் சுரங்க நடவடிக்கைகளுக்கான செயல்பாட்டுத் திட்டத்தின் விவரங்கள் சமர்ப்பிக்கப்படும்.	
5	குறிப்பாக கடுமையான மழை போன்ற இயற்கைப் பேரிடர்களின் போது, கொத்து மற்றும் வெளியேற்றும் திட்டத்தைக் கருத்தில் கொண்டு தணிப்பு நடவடிக்கைகள் போன்றவற்றின் போது கொத்து தொடர்பான இடர் மேலாண்மைத் திட்டம் குறித்து குழு விவாதிக்கும்.	தனிப்பட்ட குவாரிக்கான இடர் மேலாண்மை திட்டம் இந்த அறிக்கையில் கொடுக்கப்பட்டுள்ளது. கிளஸ்டர் பணி நிலையைப் பொறுத்த வரையில், குழு அமைக்கப்பட்டவுடன், கொத்துக்களின் வெள்ளம் மற்றும் வெளியேற்றும் திட்டம் உட்பட ஒரு கிளஸ்டராக இடர் மேலாண்மை விரிவாக விவரிக்கப்படும்.	
6	கிளஸ்டர் மேலாண்மைக் குழு, சட்டத்தின்படி அறிவியல் மற்றும் முறையான முறையில் நிலையான சுரங்கத்தை நடைமுறைப்படுத்த	கிளஸ்டருக்கான சுற்றுச்சூழல் கொள்கையானது கிளஸ்டர் நிர்வாகக் குழுவால் உருவாக்கப்படும் மற்றும்	

	சுற்றுச்சூழல் கொள்கையை உருவாக்குகிறது. வகுக்கப்பட்ட சுற்றுச்சூழல் கொள்கையை செயல்படுத்துவதில் குழுவின் பங்கு விரிவாக கொடுக்கப்படும்.	கொள்கையானது EPA சட்டம், 1986 மற்றும் அதன் திருத்தங்கள், MoEF&CC/SEIAA மற்றும் பிற ஒழுங்குமுறை அமைப்புகளின் வழிகாட்டுதல்களின்படி இருக்கும். இந்தக் கொள்கை குவாரியில் காட்டப்படும்.	
7	குழுவானது, தொகுப்பின் கீழ் வரும் தனிப்பட்ட குவாரியைப் பொறுத்த வரையில், மறுசீரமைப்பு உத்தி தொடர்பான செயல் திட்டத்தை முழுமையான முறையில் அளிக்க வேண்டும்.	ஒப்புக் கொண்டார். குறிபிட்ட எண்.4 இல் குறிப்பிடப் பட்டுள்ளபடி இது பின் பற்றப்படும்	
8	குழுவானது அவசரநிலை மேலாண்மை திட்டத்தை கிளஸ்டருக்குள் அளிக்கும்.	ஒப்புக் கொண்டார். குறிப்பிட்ட எண்.4 இல் குறிப்பிடப் பட்டுள்ளபடி இது பின் பற்றப்படும்	
9	சுரங்கத்தில் ஈடுபடும் தொழிலாளர்கள்/ஊழியர்களின் உடல்நலம் மற்றும் பொதுமக்களின் உடல்நலம் குறித்து குழு ஆலோசிக்க வேண்டும்.	ஒப்புக் கொண்டார். குறிபிட்ட எண்.4 இல் குறிப்பிடப்பட்டுள்ளபடி இது கடைபிடிக்கப்படும்	
10	நீர், சுகாதாரம் மற்றும் பாதுகாப்பு தொடர்பான நிலையான வளர்ச்சி இலக்குகளை அடைவதற்கான செயல் திட்டத்தை குழு வழங்க வேண்டும்.	ஒப்புக்கொண்டார். குறிப்பிட்ட எண்.4 இல் குறிப்பிடப் பட்டுள்ளபடி இது பின் பற்றப்படும்	
11	தீ விபத்துகள் ஏற்பட்டால் தீ பாதுகாப்பு மற்றும் வெளியேற்றும் திட்டத்தை குழு வழங்க வேண்டும்.	ஒப்புக்கொண்டார். குறிப்பிட்ட எண்.4 இல் குறிப்பிடப் பட்டுள்ளபடி இது பின் பற்றப்படும்	

சுரங்கங்களின் தாக்க ஆய்வு			
12	பின்வருவனவற்றில் ஆராய்ச்சி நிறுவனங்களிடமிருந்து வழங்கப்பட்ட குவாரி செய்ய வழங்கப்பட்ட கடிதத்தின் உத்தரவின்படி, சுரங்க குத்தகை காலம் முழுவதையும் உள்ளடக்கிய உத்தேச சுரங்க குத்தகைப் பகுதியைச் சுற்றியுள்ள சுரங்கத்தின் தாக்கம் குறித்து விரிவான ஆய்வு மேற்கொள்ளப்படும்.		
a	மண் ஆரோக்கியம் மற்றும் மண்ணின் உயிரியல், இயற்பியல் நில வேதியியல் அம்சங்கள்.	இணைக்கப்பட்டுள்ளது, இதன் விவவரங்கள். வரைவு EIA அறிக்கையின் அத்தியாயம் 3 இல் கொடுக்கப்பட்டுள்ளன.	
b	காலநிலை மாற்றம் வறட்சி, வெள்ளம் போன்றவற்றுக்கு வழிவகுக்கும்.	முன்மொழியப்பட்ட குவாரியானது மிகச் சிறிய அளவிலான திறந்த வெளிசுரங்க இயந்திரமய மாக்கப்பட்ட சுரங்க முறை கொண்டது மற்றும் காலநிலை மாற்றம், வறட்சி, வெள்ளம் போன்றவற்றில் எதிர் பார்க்கப்படும் பாதிப்புகள் மிகக் குறைவாகவே இருக்கும்.	
c	கிரீன்ஹவுஸ் வாயுக்கள் (GHG), வெப்பநிலை அதிகரிப்பு மற்றும் உள்ளூர் மக்களின் வாழ்வாதாரத்திற்கு வழிவகுக்கும் மாசுபாடு.	உற்பத்தி அளவு குறைவாக இருப்பதைக் கருத்தில் கொண்டு, 2 குழி தோண்டும் எந்திரம், 6 டிப்பர்கள் மட்டுமே ஈடுபடுத்தப்படும். இந்த உபகரணங்கள் முறையாகவும் பராமரிக்கப்படும். தவிர, கார்பன் வெளியேற்றத்தால் ஏற்படும் குறைந்த பாதிப்பை உறுதி செய்வதற்காக போக்கு வரத்து வாகனங்களுக்கு வழக்கமானவாகன உமிழ்வு சோதனைகள் செய்யப் படும். கார்பன் உமிழ்வை மேலும் குறைக்க செய்ய, ஒரு நல்ல	-

		பசுமை மற்றும் மரங்கள் நடும் திட்டம் திட்டமிடப்பட்டுள்ளது, அதில் 2400 மரங்கள் சுரங்க குத்தகை பகுதிக்கு சுற்றி நடப்படும்.	
d	நீர் மாசுபாட்டின் சாத்தியக்கூறுகள் மற்றும் நீர்வாழ் சுற்றுச்சூழல் ஆரோக்கியத்தில் தாக்கம்.	மொத்த நீர் தேவை 8 KLD. இது அருகிலுள்ள கிராமங்களில் இருந்து அவுட் சோர்சிங் செய்யப்படும். எனவே திட்டப் பகுதியில் தண்ணீர் பயன்பாட்டால் எந்த பாதிப்பும் இல்லை. மழைக்காலத்தில் வெளியேறும் நீரின் வடிவில் கழிவுநீர் உற்பத்தியானது, கீழ் குவாரியில் முறையான வடிகால் அமைப்பு மூலம் சேகரிக்கப்பட்டு, சேகரிக்கப்பட்ட நீர் வறண்ட காலங்களில் மரங்களை பராமரிக்க மற்றும் தூசியை அடக்குவதற்கு பயன் படுத்தப்படும். இருப்பினும், இந்த குவாரியில் இருந்து கழிவுநீர் வெளியேற்றப் படுவதில்லை என எதிர் பார்க்கப்படுகிறது. எனவே, நீர்மாசுபடுவதற்கான சாத்தியக் கூறுகள் மற்றும் நீர்வாழ் சுற்றுச்சூழல் அமைப்பின் ஆரோக்கியத்தில் தாக்கம் ஆகியவை எதிர் பார்க்கப்படவில்லை.	

e	விவசாயம், வனவியல் மற்றும் பாரம்பரிய நடைமுறைகள்.	திட்டப் பகுதிக்குள் வனப் பகுதி மற்றும் பாரம்பரிய சின்னம் எதுவும் இல்லை. இருப்பினும், திட்டப் பகுதியைச் சுற்றி சில விவசாய நிலங்கள் உள்ளன. குவாரி செயல்பாட்டின் காரணமாக விவசாய நிலத்தில் தூசிதுகள்கள் படிவதால் பாதிக்கப் படலாம். குவாரி பகுதி ஈரமான துளையிடுதல், கட்டுப் படுத்தப்பட்ட வெடித்தல், குவாரி சாலைகள் மற்றும் குவாரி சுற்றியுள்ள சாலைகளில் தண்ணீர் தெளித்தல் போன்ற முறையான தூசியை அடக்குவதன் மூலம் இது மூல மட்டத்தில் கட்டுப்படுத்தப் படும். காற்றின் தர மாதிரியாக்கம், காற்றின் தரத்தின் தாக்கம் 0.5 கிமீ சுற்றளவுக்கு வரையறுக்கப் பட்டுள்ளது. எனவே, 10 கிமீ சுற்றளவில் அமைந்துள்ள விவசாயம், வனவியல் மற்றும் பாரம்பரிய நடைமுறைகளுக்கு எந்த பாதிப்பும் இல்லை.	-
f	சுற்றுச்சூழலில் ஏற்படும் அழிவின் காரணமாக நீர்வெப்ப/புவிவெப்ப விளைவு.	முன் மொழியப்பட்ட குவாரி செயல்பாடு, துளையிடுதல், வெடித்தல், தோண்டுதல், ஏற்றுதல் மற்றும்	

		போக்குவரத்துடன் கூடிய திறந்த வெளி இயந்திரமயமாக்கப்பட்ட செயல்பாடு ஆகும். எனவே Hydrothermal/Geothermal இன் விளைவு இல்லை.	
g	உயிர்-புவி வேதியியல் செயல்முறைகள் மற்றும் சுற்றுச்சூழல் அழுத்தம் உட்பட அதன் அடிச்சுவடுகள்.	இது ஒரு எளிய சுரங்க நடவடிக்கை, எனவே உயிர்-புவி வேதியியல் செயல் முறைகள் கருதபடாது.	
h	மேற்பரப்பு நீரோடைகளில் வண்டல் புவி வேதியியல்.	தென்கிழக்கு பகுதியில் 10.9 கி.மீ தொலைவில் வட பெண்ணை ஆறு, அமைந்துள்ளது. சுரங்க நடவடிக்கை காரணமாக தூசி படிவதால் மேற்கூறிய நீர்நிலைகளுக்கு குறைந்த பட்ச பாதிப்பு ஏற்படலாம். ஈரமான துளையிடல், தண்ணீர் தெளித்தல் மற்றும் மரங்களை நடுவதன் மூலம் இதுகட்டுப்படுத்தப்படும்.	
விவசாயம் & வேளாண் பல்லுயிர்			
13	முன்மொழியப்பட்ட சுரங்கப் பகுதியைச் சுற்றியுள்ள விவசாய வயல்களில் ஏற்படும் பாதிப்புகள்.	ஒப்புக் கொண்டார். இது தொடர்பான விவரங்கள் அனைத்தும் குறிப்பிடப்பட்ட எண். 12 (இ) இந்த ToR க்கு இணைப்பாக இணைக்கப் பட்டுள்ளது (இணைப்பு-1 சரிபார்க்கவும்)	
14	திட்ட இடத்தைச் சுற்றியுள்ள மண் தாவரங்கள் மற்றும் தாவரங்களின் மீதான தாக்கங்கள்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-3 இல் கொடுக்கப்பட்டுள்ளது.	

15	எண் உட்பட தாவர வகைகளின் விவரங்கள். முன்மொழியப்பட்ட சுரங்கப் பகுதியில் உள்ள மரங்கள் மற்றும் புதர்கள் மற்றும், முன்மொழியப்பட்ட சுரங்கப் பகுதியின் எல்லையில் அத்தகைய தாவரங்களை இடமாற்றம் செய்வது EMP இல் குறிப்பிடப்பட்டுள்ளது.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-3 இல் கொடுக்கப்பட்டுள்ளது.	
16	சுற்றுச்சூழல் தாக்க மதிப்பீடு பல்லுயிர், இயற்கை சுற்றுச்சூழல், மண் நுண்ணுயிர் தாவரங்கள், விலங்கினங்கள் மற்றும் மண் விதை வங்கிகள் ஆகியவற்றை ஆய்வு செய்து இயற்கை சூழலை பராமரிப்பதற்கான நடவடிக்கைகளை பரிந்துரைக்க வேண்டும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-3 இல் கொடுக்கப்பட்டுள்ளது.	
17	குறிப்பிட்ட பகுதியின் நிலையான மேலாண்மை மற்றும் பொருட்கள் மற்றும் சேவைகளின் ஓட்டத்திற்கான சுற்றுச்சூழலை மீட்டெடுப்பதற்கு நடவடிக்கை பரிந்துரைக்க வேண்டும்.	திட்டப்பகுதி மற்றும் அதன் சுற்றுப் புறங்களுக்கான நிலையான நிர்வாகத் திற்கான விரிவான செயல்திட்டம் EMP இல் (அத்தியாயம் 10) விவரிக்கப்பட்டுள்ளது.	
18	திட்ட முன்மொழிபவர், அருகிலுள்ள பட்டா நிலங்கள், தோட்டக்கலை, விவசாயம் மற்றும் கால்நடைகளில் உள்ள தோட்டங்களில் திட்டத்தின் தாக்கத்தை ஆய்வு செய்து வழங்க வேண்டும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-4 இல் கொடுக்கப்பட்டுள்ளது.	
காடுகள்			
19	திட்ட முன்மொழிபவர், ரிசர்வ் காடுகளில் இல்லாத வனவிலங்குகளில் சுரங்கத்தின் தாக்கம் குறித்து விரிவான ஆய்வு செய்ய வேண்டும்	கீழ்சேவூர் ஆர்.எஃப் - 4.04 கி.மீ (வடமேற்கு) தொலைவில் உள்ளது, குமலம்பட்டு ஆர்.எஃப் 7.17 கி.மீ (தெற்கு) தொலைவில்	

		அமைந்துள்ளது. மற்றும் இடையக மண்டலத்தில் வேறு எந்த ஒதுக்கப்பட்ட காடுகளும் இல்லை. மைய மற்றும் இடையக மண்டலத்தில் பொதுவாக காணப்படும் விலங்கினங்கள் அத்தியாயம் 3 இல்கொடுக்கப்பட்டுள்ளன.	
20	சுற்றுச்சூழல் தாக்க மதிப்பீடு காடு, தாவரங்கள், உள்ளூர், பாதிக்கப்படக்கூடிய மற்றும் அழிந்து வரும் உள்நாட்டு தாவரங்கள் மற்றும் விலங்கினங்கள் மீதான தாக்கத்தை ஆய்வு செய்ய வேண்டும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-3 இல் கொடுக்கப்பட்டுள்ளது	
21	சுற்றுச்சூழல் தாக்க மதிப்பீட்டில், நிற்கும் மரங்களில் ஏற்படும் பாதிப்புகளை ஆய்வு செய்து, தற்போதுள்ள மரங்களை எண்ணி எண்ணி, பாதுகாப்புக்கு நடவடிக்கை எடுக்க வேண்டும்.	பொருந்தாது. இது ஒருவறண்ட பகுதி ஆகும்.	
22	சுற்றுச்சூழல் தாக்க மதிப்பீடு பாதுகாக்கப்பட்ட பகுதிகள், ரிசர்வ் காடுகள், தேசிய பூங்காக்கள், தாழ்வாரங்கள் மற்றும் வனவிலங்கு பாதைகள், திட்ட இடத்திற்கு அருகில் உள்ள பாதிப்புகளை ஆய்வு செய்ய வேண்டும்.	கீழ்சேவூர் ஆர்.எஃப் - 4.04 கி.மீ (வடமேற்கு) தொலைவில் உள்ளது, குமலம்பட்டு ஆர்.எஃப் 7.17 கி.மீ (தெற்கு) தொலைவில் அமைந்துள்ளது மற்றும் இடையக மண்டலத்தில் வேறு எந்த ஒதுக்கப்பட்ட காடுகளும் இல்லை. ன	
நீர் சூழல்			
23	நிலத்தடி நீர் உந்தி மற்றும் திறந்த கிணறுகள் மற்றும் ஆறுகள், தொட்டிகள், கால்வாய்கள், குளங்கள் போன்ற மேற்பரப்பு நீர்நிலைகளின் எண்ணிக்கையை விவரிக்கும் நீர்மட்டத்தின் வரைபடத்தை கருத்தில் கொண்டு, l km (சுற்றளவு) வரை	ஒரு புகழ் பெற்ற நிறுவனத்தில் இருந்து ஹைட்ரோ ஜியோலாஜிக்கல் ஆய்வு நடந்து கொண்டிருக்கிறது; இருப்பினும், இறுதி EIA சமர்ப்பிப்பு அறிக்கை	

	பாதிப்புகளை மதிப்பிடுவதற்காக நீர்-புவியியல் ஆய்வு. சுரங்க நடவடிக்கை காரணமாக அருகிலுள்ள நீர்நிலைகளில். உண்மையான கண்காணிக்கப்பட்ட தரவுகளின் அடிப்படையில், வேலை செய்வது நிலத்தடி நீரில் குறுக்கிடுமா என்பது தெளிவாகக் காட்டப்படலாம். சுரங்க குத்தகை காலம் முழுவதையும் உள்ளடக்கி, இது தொடர்பான தேவையான தரவு மற்றும் ஆவணங்கள் வழங்கப்படலாம்.	அத்தியாயம் 7 இல் இணைக்கப்படும்.	
24	அரிப்பு கட்டுப்பாட்டு நடவடிக்கைகள்.	இந்த குவாரியில் கழிவு உற்பத்தி (OB) இல்லை. இருப்பினும், மழைக்காலம் மற்றும் குவாரி பகுதிக்குள் அரிப்பு ஏற்படலாம். இதை கட்டுப்பாட்டு நடவடிக்கைகள் மூலம் கட்டு படுவதை அத்தியாயம் 8 இல் விளக்கப்பட்டுள்ளன.	
25	உத்தேச சுரங்க குத்தகைப் பகுதியைச் சுற்றியுள்ள கிராமங்கள், நீர்நிலைகள்/ ஆறுகள் மற்றும் சுற்றுச்சூழல் பலவீனமான பகுதிகளில் ஏற்படும் பாதிப்புகள் குறித்து விரிவான ஆய்வு மேற்கொள்ளப்படும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-4 இல் கொடுக்கப் பட்டுள்ளது.	
26	திட்ட ஆதரவாளர் மீன் வாழ்விடங்கள் மற்றும் நீர்நிலை மற்றும் நீர்த்தேக்கத்தில் உணவு வலை/உணவுச் சங்கிலி ஆகியவற்றில் ஏற்படும் தாக்கத்தை ஆய்வு செய்வார்.	இது பொருந்தாது.	
27	செயல்பாட்டின் மூலம் இயற்கைச் சுற்றுச்சூழலில் ஏற்படக்கூடிய துண்டாடுதல் தாக்கம் குறித்த	சுற்றுச்சூழலில் தாக்கம் துளையிடுதல் மற்றும் வெடித்தல் காரணமாக	

	விவரங்களை திட்ட முன்மொழிபவர் ஆய்வு செய்து அளிக்க வேண்டும்.	இருக்கலாம். எதிர்பார்க்கப்படும் பாதிப்புகள் மற்றும் தணிப்பு நடவடிக்கைகள் குறித்த விவரங்கள் அத்தியாயம் 4 இல் விவாதிக்கப்பட்டுள்ளன.	
28	திட்ட முன்மொழிபவர் நீர்நிலைகளில் நீர்வாழ் தாவரங்கள் மற்றும் விலங்குகளின் தாக்கம் மற்றும் நிலப்பரப்பில் ஏற்படக்கூடிய தழும்புகள், அருகிலுள்ள குகைகள், பாரம்பரிய தளம் மற்றும் தொல்பொருள் தளங்களுக்கு ஏற்படும் சேதங்கள், சாத்தியமான நில வடிவ மாற்றங்கள் காட்சி மற்றும் அழகியல் தாக்கங்களை ஆய்வு செய்து வழங்க வேண்டும்.	10 கிமீ சுற்றளவில் தாவரங்கள் மற்றும் விலங்கினங்கள் பற்றிய ஆய்வு அத்தியாயம் 4 இன் விவரிக்கப் பட்டுள்ளது. திட்டப் பகுதியின் சுற்றுச் சூழலைப் பொறுத்தமட்டில் எதிர் பார்க்கப்படும் பாதிப்புகள் மிகக் குறைவு மற்றும் திட்டப் பகுதிக்குள் அது குறைக்கப்படும். இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-11இல் கொடுக்கப் பட்டுள்ளது.	
29	குறிப்பு விதிமுறைகள் குறிப்பாக மண் ஆரோக்கியம், மண் அரிப்பு, மண்ணின் இயற்பியல், இரசாயன கூறுகள் மற்றும் நுண்ணுயிர் கூறுகள் மீதான தாக்கத்தை ஆய்வு செய்ய வேண்டும்.	ஒப்புகொள்ளபட்டது.	
30	சுற்றுச்சூழல் தாக்க மதிப்பீடு ஈரநிலங்கள், நீர்நிலைகள், ஆறுகள் ஓடைகள், ஏரிகள் மற்றும் விவசாய இடங்கள் குறித்து ஆய்வு செய்ய வேண்டும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-3 இல் கொடுக்கப்பட்டுள்ளது.	

ஆற்றல்			
31	சத்தம், காற்று, நீர், தூசி கட்டுப்பாடு ஆகியவற்றை கட்டுப்படுத்த எடுக்கப்பட்ட நடவடிக்கைகள் மற்றும் ஆற்றலை திறம்பட பயன்படுத்த எடுக்கப்பட்ட நடவடிக்கைகள் வழங்கப்பட வேண்டும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-4 இல் கொடுக்கப்பட்டுள்ளது.	
பருவநிலை மாற்றம்			
32	சுற்றுச்சூழல் தாக்க மதிப்பீடு கார்பன் உமிழ்வை விரிவாக ஆய்வு செய்வதுடன், கார்பன் மூழ்கிகளின் வளர்ச்சி மற்றும் வெப்பநிலை குறைப்பு உள்ளிட்ட பிற உமிழ்வு மற்றும் காலநிலை தணிப்பு நடவடிக்கைகளின் கட்டுப்பாடு உட்பட கார்பன் உமிழ்வைத் தணிப்பதற்கான நடவடிக்கைகளை பரிந்துரைக்கும்.	இணைக்கப்பட்டுள்ளது, இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-4 இல் கொடுக்கப்பட்டுள்ளது.	
33	சுற்றுச்சூழல் தாக்க மதிப்பீடு, காலநிலை மாற்றம், வெப்பநிலை உயர்வு, மாசுபாடு மற்றும் மண்ணின் மேல் மற்றும் மண்ணுக்குக் கீழே உள்ள கார்பன் இருப்பு ஆகியவற்றின் தாக்கத்தை ஆய்வு செய்ய வேண்டும்.	இணைக்கப்பட்டுள்ளது. இதன்விவரங்கள்அனைத்தும் அத்தியாயம்-4 இல் கொடுக்கப்பட்டுள்ளது.	
சுரங்க மூடல் திட்டம்			
34	வழங்கப்பட்ட சுரங்க திட்ட பகுதி தகவல் தொடர்பு ஆணையின்படி சுரங்க குத்தகை காலம் முழுவதையும் உள்ளடக்கிய விரிவான சுரங்க மூடல் திட்டம்.	இணைக்கப்பட்டுள்ளது. சுரங்கமூடல் திட்டம் அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்தில் இணைக்கப்பட்டுள்ளது, மேலும் இது அத்தியாயம் 7 இல்இணைக்கப்பட்டுள்ளது.	

EMP			
35	விரிவான சுற்றுச்சூழல் மேலாண்மைத் திட்டத்துடன் தழுவல், தணிப்பு மற்றும் தீர்வு உத்திகள், வழங்கப்பட்ட துல்லியமான பகுதி தகவல்தொடர்பு ஆணையின்படி முழு சுரங்க குத்தகை காலத்தையும் உள்ளடக்கியது.	இணைக்கப்பட்டுள்ளது. இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-10 இல் கொடுக்கப்பட்டுள்ளது.	
36	சுற்றுச்சூழல் தாக்க மதிப்பீடு, பசுமைப் பகுதி மேம்பாட்டிற்கான பட்ஜெட் மற்றும் பேரிடர் மேலாண்மைத் திட்டம் உள்ளிட்ட கண்ணிவெடி மூடல் திட்டத்துடன் EMP பற்றிய விரிவான ஆய்வு நடத்த வேண்டும்.	இணைக்கப்பட்டுள்ளது. இதன் விவரங்கள் அனைத்தும் அத்தியாயம் -10இல் கொடுக்கப் பட்டுள்ளது.	
இடர் அளவிடல்			
37	சுரங்கத்தின் செயல்பாட்டு மற்றும் பிந்தைய செயல்பாட்டின் போது எதிர்பார்க்கப்படும் பாதிப்புகள் உட்பட இடர் மதிப்பீடு மற்றும் மேலாண்மைத் திட்டத்தை வழங்குதல்.	இணைக்கப்பட்டுள்ளது. இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-7 இல் கொடுக்கப்பட்டுள்ளது.	
பேரிடர் மேலாண்மை திட்டம்			
38	பேரிடர் மேலாண்மைத் திட்டம் மற்றும் பேரிடர் தணிப்பு நடவடிக்கைகளை அனைத்து அம்சங்களையும் வழங்குதல் வழங்கப்பட்ட துல்லியமான பகுதி தகவல்தொடர்பு உத்தரவின்படி முழு சுரங்க குத்தகை காலத்தையும் உள்ளடக்கியது.	இணைக்கப்பட்டுள்ளது. இதன் விவரங்கள் அனைத்தும் அத்தியாயம்-7 இல் கொடுக்கப்பட்டுள்ளது.	
மற்றவைகள்			
39	திட்ட ஆதரவாளர் அங்கீகரிக்கப்பட்ட குடியிருப்புகள், பள்ளிகள், தொல்லியல் தளங்கள், கட்டமைப்புகள், ரயில் பாதைகள், சாலைகள், ஓடைகள், ஓடை, வாரி, கால்வாய், கால்வாய், ஆறு, ஏரி குளம், தொட்டி போன்ற நீர்நிலைகள் குறித்து 300 மீட்டர் சுற்றளவுக்கு VAO சான்றிதழை வழங்க வேண்டும். .	-	

40	MoEF& cc அலுவலக குறிப்பாணை F.No.z2-6512017-tA.III தேதியிட்ட தேதி: 30.09.2020 மற்றும் 20.10.2020 இன் படி, முன்மொழிபவர் பொது கலந்தாய்வின் போது எழுப்பப்பட்ட கவலைகளை நிவர்த்தி செய்வார் மற்றும் முன்மொழியப்பட்ட அனைத்து நடவடிக்கைகளும் சுற்றுச்சூழல் நிர்வாகத்தின் ஒரு பகுதியாக இருக்க வேண்டும். திட்டம்.	குறித்துக் கொள்ளப்பட்டது, இது இறுதி EIA/EMP அறிக்கையில் இணைக்கப் படும்.	
41	சுற்றுச்சூழலில் பிளாஸ்டிக் மற்றும் மைக்ரோபிளாஸ்டிக் காரணமாக ஏற்படக்கூடிய மாசுகளை திட்ட முன்மொழிபவர் ஆய்வு செய்து வழங்க வேண்டும். சுரங்கத்தின் போது சிந்திக்கப்படும் செயல்பாடுகள் காரணமாக நீர்வாழ் சூழல் மற்றும் நன்னீர் அமைப்புகளில் பிளாஸ்டிக் மற்றும் மைக்ரோபிளாஸ்டிக்ஸின் சுற்றுச்சூழல் அபாயங்கள் மற்றும் தாக்கங்கள் ஆராயப்பட்டு அறிக்கையிடப்படலாம்.	ஏதும் இல்லை.	
நிலையான தரநிலை ToR (தோண்டப்படும் கனிமம்)			
1.1	EIA-EMP அறிக்கையானது, 2006 EIA அறிவிப்பின் பின் இணைப்பு III இல் குறிப்பிடப்பட்டுள்ள பொதுவான கட்டமைப்பின் அடிப்படையில் ஒரு ML/திட்டப் பகுதியில்..... ஹெக்டேரில் உச்ச திறன் (.....MTPA) செயல்பாட்டிற்காகத் தயாரிக்கப்படும்.	இணைக்கப்பட்டுள்ளது	

1.2	இப்பகுதியின் சுற்றுச்சூழலின் மீதான திட்ட குறிப்பிட்ட செயல்பாடுகள் மற்றும் சுற்றுச்சூழல் தரம் ஆகியவற்றை உள்ளடக்கிய காற்று, நீர், நிலம், உயிரியல் சமூகம் போன்றவற்றை சேகரிப்பின் மூலம் உள்ளடக்கிய தாக்கங்கள் மற்றும் சுற்றுச்சூழல் மேலாண்மை திட்டத்தை உள்ளடக்கிய உச்ச திறன் செயல்பாட்டிற்காக EIA-EMP அறிக்கை தயாரிக்கப்படும். தரவு மற்றும் தகவல், கணிப்பு மாதிரியாக்கம் உட்பட தாக்கங்கள் பற்றிய தரவு உருவாக்கம்.... MTPA அனுமதிக்கப்பட்ட திட்டம்/சுரங்கத் திட்டத்தின் அடிப்படையில் கனிம உற்பத்தியின் MTPA.... MTPA. அடிப்படை தரவு சேகரிப்பு பருவமழை தவிர எந்த பருவத்திலும் (மூன்று மாதங்கள்) இருக்கலாம்.	எதிர்பார்க்கப்படும் சுற்றுச்சூழல் பாதிப்புகள் மற்றும் தணிப்பு நடவடிக்கைகள் அத்தியாயம் 4 இல் கொடுக்கப்பட்டுள்ளன.	
1.3	பின் டிராப் மற்றும் 500-1000 மீ இடைவெளியில் குவரியின் ஒருங்கிணைப்புடன் சரியான KML கோப்பு வழங்கப்பட வேண்டும்	ஒப்புக்கொள்ளப்பட்டது	
1.4	மைய மண்டலத்தின் ஆய்வுப் பகுதி வரைபடம் (திட்டப் பகுதி) மற்றும் தாங்கல் மண்டலத்தின் 10 கிமீ பரப்பளவு (1: 50,000 அளவு) நிலப் பயன்பாடு, ஆறுகள்/ஓடைகள்/நடுவாய்கள்/கால்வாய்கள் உள்ளிட்ட மேற்பரப்பு வடிகால் அமைப்பு போன்ற முக்கிய நிலப்பரப்பு அம்சங்களைத் தெளிவாகக் கோடிட்டுக் காட்டுகிறது. மக்கள் வசிக்கும் இடங்கள்,	திட்டத் தளத்தின் 10 கிமீ சுற்றளவில் பஃபர் பகுதியின் நில பயன்பாட்டு முறை அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	

	ரயில்வே, சாலைகள், குழாய்கள், பெரிய தொழிற்சாலைகள், சுரங்கங்கள் மற்றும் பிற மாசுபடுத்தும் மூலங்கள் உள்ளிட்ட முக்கிய கட்டுமானங்கள். உயிர்க்கோளக் காப்பகங்கள்/தேசியப் பூங்காக்கள்/WL சரணாலயங்கள்/ யானைகள் காப்பகங்கள், காடுகள் (ஒதுக்கப்பட்ட/பாதுகாக்கப்பட்ட), விலங்கினங்களின் இடம்பெயர்ந்த இடங்கள், அழிந்து வரும் விலங்கினங்கள் மற்றும் மருத்துவ மற்றும் பொருளாதார முக்கியத்துவம் வாய்ந்த தாவரங்கள் போன்ற சுற்றுச்சூழல் உணர்வுப் பகுதிகள் 15 கி.மீ. பகுதி கொடுக்கப்பட வேண்டும். மேலே உள்ள விவரங்கள் அட்டவணை வடிவத்திலும் வழங்கப்பட வேண்டும்		
1.5	விவசாய நிலத்தை வரையறுக்கும் மைய மண்டலத்தைக் காட்டும் வரைபடம் (வருவாய்ப் பதிவேடுகளில் வரையறுக்கப்பட்டுள்ள நீர்ப்பாசனம் மற்றும் பாசனம் இல்லாத, சாகுபடி செய்ய முடியாத நிலம், வனப் பகுதிகள் (பதிவுகளின்படி), நீர்நிலைகள் போன்ற பிற இயற்பியல் அம்சங்களுடன் வழங்கப்பட வேண்டும்.	திட்டத் தளத்தின் 10 கிமீ சுற்றளவில் பஃபர் பகுதியின் நில பயன்பாட்டு முறை அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	
1.6	மைய மண்டலத்தின் வடிகால் பகுதி மற்றும் ஆய்வுப் பகுதியின் 25 கி.மீ (மைய மண்டலத்தின் நீர்நிலைகள் இறுதியில் குத்தகை/திட்டப் பகுதிக்கு வெளியே உள்ள முக்கிய ஆறுகள்/ ஓடைகளில் சேரும்) பகுதியைக் காட்டும் விளிம்பு வரைபடமும் தனி வரைபடத்தில் தெளிவாகக் குறிப்பிடப்பட வேண்டும்.	விளிம்பு மற்றும் வடிகால் வரைபடம், அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	

1.7	சுரங்கத்தின் உள்ளேயும் வெளியேயும் உள்ள 25 கிமீ பரப்பளவைக் கொண்ட நீர்ப்பிடிப்புப் பகுதியின் பெயர்கள், ஆறுகள்/ நதிநீர் அமைப்பு விவரங்கள் மற்றும் அதற்குரிய ஒழுங்குமுறை ஆகியவை வழங்கப்பட வேண்டும். முக்கிய நதிகளின் படுகையுடன் கூடிய நீர்ப்பிடிப்புப் பகுதியின் வடிகால் அமைப்பை வரைபடம் தெளிவாகக் குறிக்க வேண்டும். வடிகால்/நதிகளை திசை திருப்புவதற்கு நீரின் நீளம், அளவு மற்றும் தரம் போன்ற வடிவங்களில் விரிவாக்கம் தேவை.	வடிகால் வரைபடம், அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	
1.8	கனிம இருப்பு விவரங்கள், ஆய்வுப் பகுதியின் புவியியல் நிலை மற்றும் வேலை செய்ய வேண்டிய தையல்கள், இறுதி வேலை ஆழம் மற்றும் சுரங்க வாழ்க்கையின் இறுதி வரை முற்போக்கான நிலை வாரியான வேலைத் திட்டம் ஆகியவை அங்கீகரிக்கப்பட்ட மதிப்பிடப்பட்ட திறன் மற்றும் உற்பத்தியின் காலண்டர் திட்டங்களின் அடிப்படையில் வழங்கப்பட வேண்டும். அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்திலிருந்து. புவியியல் வரைபடங்கள் மற்றும் பிரிவுகள் சேர்க்கப்பட வேண்டும். முற்போக்கான சுரங்க மேம்பாடு மற்றும் கருத்தியல் இறுதி சுரங்க மூடல் திட்டமும் புள்ளிவிவரங்களில் காட்டப்பட வேண்டும். சுரங்கத் திட்டம் மற்றும் சுரங்கம் மூடல் திட்ட அனுமதியின் விவரங்கள் பசுமையான வயல் மற்றும் விரிவாக்கத் திட்டங்களுக்கு அளிக்கப்பட வேண்டும்.	கனிம இருப்பு, ஆய்வுப் பகுதியின் புவியியல் நிலை அத்தியாயம்-2 கொடுக்கப்பட்டுள்ளது.	

1.9	சுரங்க முறைகள், தொழில்நுட்பம், பயன்படுத்த வேண்டிய உபகரணங்கள், முதலியன பற்றிய விவரங்கள், குறிப்பிட்ட தொழில்நுட்பத்தைத் தேர்ந்தெடுப்பதற்கான பகுத்தறிவு மற்றும் சாத்தியமான தாக்கங்களைப் பொறுத்து பயன்படுத்த முன்மொழியப்பட்ட உபகரணங்களை வழங்க வேண்டும்.	சுரங்க முறை விவரங்கள் அத்தியாயம்-2 கொடுக்கப்பட்டுள்ளது.	
1.10	நீரியல், இயற்கை வடிகால் மாற்றியமைத்தல், ML மற்றும் குத்தகை/திட்டத்தை ஒட்டி பாயும் ஆறுகள்/நீர்ப் பாதைகளை திசை திருப்புதல் மற்றும் வழித்தடமாக்குதல் மற்றும் தற்போதுள்ள பயனர்கள் மீதான தாக்கம் மற்றும் சுரங்க நடவடிக்கைகளின் தாக்கம்.	விவரங்கள் அத்தியாயம்-11 கொடுக்கப்பட்டுள்ளது.	
1.11	குவாரி பகுதி, OB டம்ப்ஸ், கிரீன் பெல்ட், பாதுகாப்பு மண்டலம், கட்டிடங்கள், உள்கட்டமைப்பு, ஸ்டாக்யார்ட், டவுன்ஷிப்/காலனி (எம்.எல்.க்கு உள்ளேயும் அதை ஒட்டியும்) சுரங்க நடவடிக்கைகளுக்காக முன்மொழியப்பட்ட நிலத்தை உடைப்பதைக் காட்டும் சுரங்கத்தின் விரிவான தளத் திட்டம்.), இடையூறு இல்லாத பகுதி -ஏதேனும் இருந்தால், குத்தகை / திட்டப் பகுதிகளை ஒட்டிய இயற்கை வடிகால்களுடன், தற்போதுள்ள சாலைகள், வடிகால்கள்/இயற்கை நீர்நிலைகள் போன்ற நிலப்பரப்பு அம்சங்கள் தடையின்றி விடப்பட வேண்டும், மேலும் கரைகள்/கட்டுகள் கட்டும் வகையில் அவற்றை மாற்றியமைத்தல், முன்மொழியப்பட்ட நீர்நிலைகள்/மறு-சேனல்கள், அணுகுமுறை சாலைகள், பெரிய சாலைகள் போன்றவை குறிப்பிடப்பட வேண்டும்.	திட்டத் தளத்தின் 10 கிமீ சுற்றளவில் பஃபர் பகுதியின் நில பயன்பாட்டு முறை அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	

1.12	அப்பகுதியின் நிலப் பயன்பாடு (விவசாய நிலம்/ வனப்பகுதி/ மேய்ச்சல் நிலம்/ தரிசு நிலம்/ நீர்நிலைகள்) கீழே கொடுக்கப்பட்டுள்ள அட்டவணையின்படி வழங்கப்பட வேண்டும். திட்டத்தின் தாக்கங்கள், நில பயன்பாட்டில் ஏதேனும் இருந்தால், குறிப்பாக, விவசாய நிலம்/காடு/ மேய்ச்சல் நிலம்/நீர்நிலைகள் குத்தகை/ திட்டத்திற்கு உட்பட்டவை மற்றும் சுரங்க நடவடிக்கைகளுக்காக கையகப்படுத்தப்பட்டவை பகுப்பாய்வு செய்யப்பட வேண்டும். மேற்பரப்பு உரிமைகள் மற்றும் சுரங்க உரிமைகளின் கீழ் பரப்பளவு குறிப்பிடப்பட வேண்டும். சுரங்க உரிமைகளின் கீழ் மேற்பரப்பு உரிமைகள் பகுதியின் கீழ் பரப்பளவு (ha) S.N ML/திட்டம் நில பயன்பாட்டு உரிமைகள்(ha) (ha) இரண்டின் கீழும் உள்ள பகுதி (ha) 1 விவசாய நிலம் 2 வன நிலம் 3 மேய்ச்சல் நிலம் 4 குடியிருப்புகள் 5 மற்றவை (குறிப்பிடவும்) S.N. விவரங்கள் பகுதி (எக்டேர்) 1 கட்டிடங்கள் 2 உள்கட்டமைப்பு 3. சாலைகள் 4 மற்றவை (குறிப்பிடவும்) மொத்தம்.	திட்டத் தளத்தின் 10 கிமீ சுற்றளவில் பஃபர் பகுதியின் நில பயன்பாட்டு முறை பக்கம் அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	
1.13	ஆய்வுப் பகுதியில் (10 கி.மீ.) தற்போதுள்ள தாவரங்கள் மற்றும் விலங்கினங்கள் குறித்த ஆய்வு சம்பந்தப்பட்ட துறையின் நிறுவனத்தால் மேற்கொள்ளப்பட வேண்டும். மைய மற்றும் ஆய்வுப் பகுதிக்கு தனித்தனியாக அங்கீகரிக்கப்பட்ட தாவரங்கள் மற்றும் விலங்கினங்களின் பட்டியலையும், அழிந்துவரும் விலங்கினங்களின்	திட்ட தளத்தின் 10 கிமீ சுற்றளவில் பஃபர் பகுதியின் தாவரங்கள் மற்றும் விலங்கினங்கள் பக்கம் அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	

	இடம்பெயர்வு நடைபாதையின் ஒரு பகுதியாக ஆய்வுப் பகுதி அமைகிறதா என்பதைத் தெளிவாகக் குறிப்பிடும் அறிக்கையும் கொடுக்கப்பட வேண்டும். ஆய்வுப் பகுதி தாவரங்கள் மற்றும் விலங்கினங்களை ஆபத்தில் ஆழ்த்தியிருந்தால், அல்லது அட்டவணை-I இனங்கள் அவ்வப்போது சென்று அல்லது வாழ்விடமாகப் பயன்படுத்தினால், அல்லது சுற்றுச்சூழலின் உணர்திறன் பகுதியிலிருந்து 15 கி.மீக்குள் திட்டம் அமைந்திருந்தால், அல்லது இடம்பெயர்வு நடைபாதையாகப் பயன்படுத்தப்பட்டால், ஒரு விரிவான பாதுகாப்புத் திட்டம் மற்றும் பொருத்தமான வரவு செலவுத் திட்ட ஒதுக்கீடுகள் தயாரிக்கப்பட்டு EIA-EMP அறிக்கையுடன் சமர்ப்பிக்கப்பட வேண்டும்; மற்றும் மாநில அரசாங்கத்தின் CWLW இன் கருத்துகள்/கவனிப்பு. மேலும் பெற்று தரப்பட வேண்டும். திட்ட தளத்தின் 10 கிமீ சுற்றளவில் பஃபர் பகுதியின் தாவரங்கள் மற்றும் விலங்கினங்கள் பக்கம் அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது		
1.14	ஒரு பருவகால (மழைக்காலம் தவிர) சுற்றுச்சூழல் தரம் பற்றிய முதன்மை அடிப்படை தரவு - காற்று (PM10, PM2.5, SOx, NOx மற்றும் ஹெவி மெட்டல்களான Hg, Pb, Cr, As போன்றவை), சத்தம், நீர் (மேற்பரப்பு மற்றும் நிலத்தடி நீர்) , மண் - AAQ சேகரிப்பு காலத்திற்கான அதே பருவத்துடன் ஒத்துப்போகும் ஒரு சீசன் மீட் டேட்டாவுடன் சேர்த்து வழங்கப்பட வேண்டும். அந்தந்த ஆய்வகத்தின் NABL/ MoEF & CC சான்றிதழின் விவரம் மற்றும் வழங்கப்பட வேண்டிய ஆலோசகரின் NABET அங்கீகாரம்	சுற்றுச்சூழல் விவரங்கள். அத்தியாயம்-3 இன் விளக்கத்தின் கீழ் கொடுக்கப்பட்டு உள்ளன.	

1.15	ஆய்வுப் பகுதியின் வரைபடம் (1: 50, 000 அளவுகோல்) வாழ்விடங்கள், பிற தொழில்கள் / சுரங்கங்கள், மாசுபடுத்தும் ஆதாரங்களின் இருப்பிடம் ஆகியவற்றைக் காட்டும் பல்வேறு மாதிரி நிலையங்களின் இருப்பிடத்தைக் காட்டும். குத்தகை/ திட்டப் பகுதியின் அளவு, கீழ்க்காற்று (காற்று)/கீழ்நிலை (மேற்பரப்பு நீர்)/நிலத்தடி நீர் ஆட்சியில் (ஓட்டத்தின் அடிப்படையில்) முன்மொழியப்பட்ட பாதிப்புகள் ஆகியவற்றின் அடிப்படையில் மைய மற்றும் இடையக மண்டலங்களில் உள்ள மாதிரி நிலையங்களின் எண்ணிக்கை மற்றும் இருப்பிடம் தேர்ந்தெடுக்கப்பட வேண்டும்.) ஒரு நிலையம் மேல்காற்று /அப்ஸ்ட்ரீம்/ பாதிப்பு இல்லாத /மாசுபடுத்தாத பகுதியில் கட்டுப்பாட்டு நிலையமாக இருக்க வேண்டும். CPCB வழிகாட்டுதல்கள் மற்றும் ISI தரநிலைகள் மற்றும் CPCB வகைப்பாட்டின்படி நிலத்தடி நீர் மற்றும் மேற்பரப்பு நீர் ஆகிய இரண்டிற்கும் நீர் சோதனைக்கான அளவுருக்கள் மற்றும் பொருந்தக்கூடிய இடங்களில் கண்காணிப்பு இருக்க வேண்டும். குறிப்பிடப்பட்ட தரநிலைகளுடன் கவனிக்கப்பட்ட மதிப்புகள் வழங்கப்பட வேண்டும்.	சுற்றுச்சூழல் விவரங்கள். அத்தியாயம்-3 இன் விளக்கத்தின் கீழ் கொடுக்கப்பட்டு உள்ளன.	
1.16	முறையான அடிப்படைக் காற்றின் தர மதிப்பீட்டிற்கு, அப்பகுதியில் உள்ள காற்றின் ரோஜா முறை மதிப்பாய்வு செய்யப்பட வேண்டும், அதற்கேற்ப AAQMS இன் இருப்பிடம் காற்றின் தரத் தரவுகளை கீழ்க்காற்றுப் பகுதிகளில் போதுமான கண்காணிப்பு நிலையங்கள் மூலம் சேகரிப்பதன் மூலம் திட்டமிடப்பட வேண்டும். அடிப்படைத் தரவைச் சேகரிப்பதற்கான	சுற்றுச்சூழல் விவரங்கள். அத்தியாயம்-3 இன் விளக்கத்தின் கீழ் கொடுக்கப்பட்டு உள்ளன.	

	கண்காணிப்பு இடம் ஒட்டுமொத்தமாக 10 கிமீ இடையக மண்டலத்தை உள்ளடக்கியதாக இருக்க வேண்டும், அதாவது 10 கிமீ இடையகப் பகுதியில் சிதறடிக்கப்பட வேண்டும். விரிவாக்கம் ஏற்பட்டால், CAAQMS இன் காட்டப்படும் தரவு மற்றும் வழங்கப்பட வேண்டிய கண்காணிப்புத் தரவுகளுடன் அதன் ஒப்பீடு		
1.17	சாலையின் இருபுறமும் 100 மீட்டர் தொலைவில் குடியிருப்புகள் இருப்பதுடன், காற்றின் தரத்தில் ஏற்படும் பாதிப்பு, அதன் சரியான நடவடிக்கைகள் மற்றும் சாலையை விரிவுபடுத்துவதற்கான காலக்கெடுவுடன் செயல்திட்டத்துடன் விரிவான போக்குவரத்து ஆய்வு. இந்த திட்டம் எண்ணிக்கையை அதிகரிக்கும். கார்பன் உமிழ்வுக்கு மறைமுகமாகப் பங்களிக்கும் சாலையில் செல்லும் வாகனத்தின் இழப்பீட்டுத் திட்டம் என்ன என்பதை EIA/ EMP அறிக்கையில் தெளிவாகக் குறிப்பிட வேண்டும்.	விவரங்கள். அத்தியாயம்-4 இன் கொடுக்கப்பட்டு உள்ளன.	
1.18	உண்மையான கணக்கெடுப்பு அறிக்கையுடன் நடத்தப்படும் சமூக-பொருளாதார ஆய்வு மற்றும் மக்கள்தொகை கணக்கெடுப்புத் தரவுகளிலிருந்து வழங்கப்பட வேண்டிய ஒப்பீட்டு மதிப்பீடு ஆகியவை EIA/ EMP அறிக்கையிலும் வழங்கப்பட வேண்டும், மேலும் ஆய்வுப் பகுதியின் தொழில் நிலை மற்றும் பொருளாதார நிலை மற்றும் பொருளாதார ரீதியாக என்ன திட்டம் பங்களிக்கும் என்பது	சமூகப் பொருளாதாரச் சூழல் விவரங்கள் அத்தியாயம்-3 கீழ் கொடுக்கப்பட்டு உள்ளன.	

	தெளிவாகக் குறிப்பிடப்பட வேண்டும். . ஆய்வுப் பகுதியில் உள்ள உள்கட்டமைப்பு வசதிகள் மற்றும் வசதிகளின் நிலை மற்றும் வழங்கப்பட வேண்டிய மக்கள்தொகைக் கணக்கெடுப்புத் தரவுகளுடன் ஒப்பீட்டு மதிப்பீடு மற்றும் பின்பற்றப்பட வேண்டிய CSR செயல்பாடுகளுக்கான தேவை அடிப்படையிலான கணக்கெடுப்பின் துவக்கம் மற்றும் அளவீடு ஆகியவற்றுடன் அதை இணைக்க வேண்டும்.		
1.19	சூழலியல் மற்றும் பல்லுயிர் ஆய்வானது, மேற்பரப்பின் உள்கட்டமைப்பு மேம்பாடு அல்லது சுரங்க நடவடிக்கைகளுக்கு வனப் பகுதியில் ஏற்படும் மாற்றத்தின் தாக்கத்தை சுட்டிக்காட்ட வேண்டும். திசை திருப்புதல்.	உயிரியல் சூழல் விவரங்கள் அத்தியாயம்-3 கீழ் கொடுக்கப்பட்டு உள்ளன.	
1.20	பாதிப்பு மண்டலத்தில் உள்ள மக்களின் ஆரோக்கியம் மற்றும் சுரங்கத்திற்கான பணியாளர்கள் மற்றும் மனிதவளத்தின் தொழில்சார் ஆரோக்கியம் மற்றும் பாதுகாப்புக்கான நடவடிக்கைகள் குறித்த அடிப்படை தரவு சமர்ப்பிக்கப்பட வேண்டும்.	சுகாதார விவரங்கள் அத்தியாயம்-3 கீழ் கொடுக்கப்பட்டு உள்ளன.	
1.21	அப்பகுதியின் முன்மொழியப்பட்ட ஹைட்ரோ ஜியோலாஜி திட்டம்/செயல்பாட்டின் தாக்கம் மதிப்பிடப்பட்டு அறிக்கை சமர்ப்பிக்கப்படும். GEC 2015 வழிகாட்டுதல்களின்படி ஹைட்ரோ ஜியோலாஜி தயாரிக்கப்பட்டு சமர்ப்பிக்கப்பட வேண்டும்	ஒரு புகழ்பெற்ற நிறுவனத்தில் இருந்து ஹைட்ரோ ஜியோலாஜிக்கல் ஆய்வு நடந்து கொண்டிருக்கிறது; இருப்பினும், இறுதி EIA சமர்ப்பிப்பு அறிக்கை அத்தியாயம் 7 இல் இணைக்கப்படும்.	

1.22	நீண்ட கால கண்காணிப்பு நடவடிக்கைகள் உட்பட மைய மண்டலம் மற்றும் 10 கிமீ தாங்கல் மண்டலத்திற்குள் உள்ள நீர்வளவியல் மற்றும் நிலத்தடி நீர் ஆட்சியில் சுரங்கம் மற்றும் சுரங்கத்தில் இருந்து நீர் உறிஞ்சுதல் ஆகியவற்றின் தாக்கம் வழங்கப்பட வேண்டும். மழைநீர் சேகரிப்பு விவரங்கள் மற்றும் நிலத்தடி நீரை ரீசார்ஜ் செய்வதற்கான நடவடிக்கைகள் நிலத்தடி நீர் இருப்பு குறையும் போது மற்றும்/ அல்லது அந்த பகுதி இருண்ட / சாம்பல் மண்டலத்திற்குள் இருந்தால் பிரதிபலிக்க வேண்டும்.	ஹைட்ரோஜியாலஜி மற்றும் நிலத்தடி நீர் விவரங்கள் பற்றிய சுரங்கத்திலிருந்து சுருக்கம் அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	
1.23	முன்கணிப்பிற்கான மாடலிங், தணிப்பு/ தடுப்பு, தொடர் கண்காணிப்பு நடவடிக்கைகள் மற்றும் பாதுகாப்புச் சிக்கல்கள் உள்ளிட்ட நிலம் சரிவு பற்றிய ஆய்வு மேற்கொள்ளப்பட வேண்டும்.	நிலம் சரிவு அத்தியாயம்-3 கொடுக்கப்பட்டுள்ளது	
1.24	விரிவான நீர் இருப்பு வழங்கப்பட வேண்டும். மணல் அள்ளுவதற்கு தண்ணீரைப் பயன்படுத்துதல் உள்ளிட்ட சுரங்க நடவடிக்கைகளில் பல்வேறு நடவடிக்கைகளுக்கு ஏற்ப தண்ணீர் தேவையை பிரித்து தனித்தனியாக வழங்க வேண்டும். சுரங்கத்தில் பயன்படுத்துவதற்கான நீர் ஆதாரம், மாநில அரசின் தகுதியான ஆணையத்தின் அனுமதி. மற்றும் போட்டியிடும் பயனர்களுக்கு ஏற்படும் பாதிப்புகள் வழங்கப்பட வேண்டும்.	சுரங்கங்களில் நீர் பயன்படுத்துவதால் ஏற்படும் பாதிப்பு மற்றும் நீர் சமநிலை. அத்தியாயம்-4 கொடுக்கப்பட்டுள்ளன.	
1.25	சுற்றுச்சூழல் மேலாண்மை திட்டத்தின் ஒரு பகுதியாக செயல்படுத்தப்படும் அனைத்து காற்று மாசுக் கட்டுப்பாட்டு கருவிகளின் (APCEs) வடிவமைப்பு விவரங்களை PP சமர்ப்பிக்க வேண்டும்.	சுற்றுச்சூழல் மேலாண்மை திட்டத்தின் ஒரு பகுதியாக செயல்படுத்தப்படும் காற்று மாசுக் கட்டுப்பாட்டு கருவிகள் (APCEs) அத்தியாயம்-10 கொடுக்கப்பட்ட விவரங்கள்	

1.26	PP ஆனது LNG/CNG அடிப்படையிலான சுரங்க இயந்திரங்கள் மற்றும் டிரக்குகளை சுரங்க செயல்பாடு மற்றும் கனிம போக்குவரத்துக்கு பயன்படுத்த முன்மொழிகிறது. ஆற்றலைப் பாதுகாக்க அல்லது புதுப்பிக்கத்தக்க ஆதாரங்களைப் பயன்படுத்துவதற்கு எடுக்கப்பட்ட நடவடிக்கைகள் ஆராயப்பட வேண்டும்.	குவாரி செயல்பாட்டின் முதலீட்டிற்குப் பிறகு இது முடிந்தவரை கடை பிடிக்கப்படும்.	
1.27	சுரங்க செயல்பாடு மற்றும் தொடர்புடைய கார்பன் உறிஞ்சுதல் திட்டத்திலிருந்து கிரீன்ஹவுஸ் உமிழ்வு வாயுக்களை மதிப்பிடுவதற்கு PP கொடுக்க வேண்டும்.	கிரீன்ஹவுஸ் உமிழ்வு வாயு விவரங்கள் அத்தியாயம்-10 கொடுக்கப்பட்டுள்ளது	
1.28	தணிப்பு நடவடிக்கைகள், இடர் மதிப்பீடு மற்றும் பேரிடர் தயார்நிலை மற்றும் மேலாண்மைத் திட்டத்துடன் கூடிய தள குறிப்பிட்ட தாக்க மதிப்பீடு வழங்கப்பட வேண்டும்.	அதன் தணிப்பு நடவடிக்கைகளுடன் தாக்க மதிப்பீடு, இடர் மதிப்பீடு மற்றும் பேரிடர் தயார்நிலை மற்றும் மேலாண்மை திட்டம் அத்தியாயம்-7 கொடுக்கப்பட்டுள்ளது.	
1.29	சுரங்க முறை, தொழில்நுட்பம், தேர்ந்தெடுக்கப்பட்ட இயந்திரங்களின் பயன்பாடு மற்றும் காற்றின் தரம், கனிம போக்குவரத்து, கையாளுதல் மற்றும் சேமிப்பு/ஸ்டாக்யார்ட் போன்றவற்றின் தாக்கம், வெடிப்பு, சத்தம் மற்றும் அதிர்வுகளின் தாக்கம் ஆகியவை வழங்கப்பட வேண்டும்.	சுரங்க முறை, தொழில்நுட்ப விவரங்கள் அத்தியாயம்-1 கொடுக்கப்பட்டுள்ளது.	
1.30	சுரங்கப் பகுதிக்குள் மற்றும் குத்தகை/திட்டத்திற்கு வெளியே கனிமப் போக்குவரத்தின் தாக்கங்கள், தப்பியோடிய உமிழ்வை உருவாக்கும் குறிப்பிட்ட பகுதிகளைக் குறிக்கும் ஓட்ட	கனிம போக்குவரத்து விவரங்கள் அத்தியாயம்-4 கொடுக்கப்பட்டு உள்ளன.	

	விளக்கப்படத்துடன் வழங்கப்பட வேண்டும். போக்குவரத்து, கையாளுதல், கனிம மற்றும் கழிவுகளை காற்றின் தரத்தில் மாற்றுதல், பணிமனையிலிருந்து வெளியேறும் கழிவுகள் போன்றவற்றின் தாக்கங்கள், HEMM மற்றும் பிற இயந்திரங்கள்/உபகரணங்களைப் பராமரிப்பதற்கான மேலாண்மைத் திட்டம் ஆகியவை கொடுக்கப்பட வேண்டும். தொழிலாளர்களுக்கான ஓய்வு இடங்கள் மற்றும் கேண்டீன் போன்ற பல்வேறு வசதிகள் மற்றும் இந்த நடவடிக்கைகளில் இருந்து வெளியேறும் கழிவுகள் / மாசு சுமை போன்ற விவரங்களும் வழங்கப்பட வேண்டும்.		
1.31	வாகன நிறுத்துமிடம், ஓய்வு பகுதிகள் மற்றும் கேன்டீன் போன்றவற்றின் அடிப்படையில் தொழிலாளர்களுக்கு வழங்கப்பட வேண்டிய பல்வேறு வசதிகள் மற்றும் இந்த நடவடிக்கைகளால் ஏற்படும் கழிவுகள்/மாசு சுமை பற்றிய விவரங்களும் அளிக்கப்பட வேண்டும்.	பார்க்கிங், ஓய்வு பகுதிகள் மற்றும் கேண்டீன், மற்றும் கழிவுகள்/மாசு சுமை விவரங்கள் அத்தியாயம் -4 கொடுக்கப்பட்டுள்ளது	
1.32	மொபைல்/ஸ்டாடிக் வாட்டர் ஜெட் விமானத்தின் எண்ணிக்கை மற்றும் செயல்திறன், சுரங்கத்தின் உள்ளே முக்கிய கனிம போக்குவரத்து சாலையில் மூடுபனி பீரங்கி தெளிக்கும் அமைப்பு, சுரங்கம்/ ஸ்டாக்யார்ட்/ சைடிங்கிற்கான அணுகுமுறை சாலைகள் மற்றும் காற்றின் தரத்தை பாதிக்கும் வகையில் அவற்றின் பயன்பாட்டின் அதிர்வெண் ஆகியவை வழங்கப்பட வேண்டும்.	EMP இன் கீழ் 1.0 லட்சம் செலவில் மொபைல் வாட்டர் டேங்கர்களை முன்மொழிபவர் வழங்குவார்.	

1.33	இறுதி சுரங்க மூடல் திட்டம் மற்றும் சுரங்கத்திற்கு பிந்தைய நில பயன்பாடு மற்றும் நிலம்/வாழ்விடத்தை முன்கூட்டிய நிலைக்கு மீட்டமைத்தல் ஆகியவை வழங்கப்பட வேண்டும். வெட்டியெடுக்கப்பட்ட பகுதியின் சூழலியல் மறுசீரமைப்பு மற்றும் சுரங்கத்திற்குப் பிந்தைய நிலத்தைப் பயன்படுத்துவதற்கான திட்டம் விரிவான செலவு ஏற்பாடுகளுடன் தயாரிக்கப்பட வேண்டும். கழிவுகளின் தாக்கம் மற்றும் மேலாண்மை மற்றும் மறு கையாளுதல் (பொருந்தக்கூடிய இடங்களில்) மற்றும் பின் நிரப்புதல் மற்றும் முற்போக்கான சுரங்க மூடல் மற்றும் மறுசீரமைப்பு ஆகியவை வழங்கப்பட வேண்டும்.	இறுதி சுரங்க மூடல் திட்டம் மற்றும் சுரங்கத்திற்கு பிந்தைய நில பயன்பாட்டு விவரங்கள் அத்தியாயம்-7 இல் கொடுக்கப்பட்டுள்ளது	
1.34	போதுமான பசுமைப்பட்டை அருகில் உள்ள பகுதிகள், கனிம இருப்பு மற்றும் கனிமங்களின் போக்குவரத்து பகுதி ஆகியவை தேர்ந்தெடுக்கப்பட்ட இனங்களின் விவரங்களுடன் வழங்கப்பட வேண்டும் மற்றும் பிழைக்கும் விகிதம் குறிப்பாக போக்குவரத்து பாதையை சுற்றி பசுமை பெல்ட் மேம்பாடு மேற்கொள்ளப்பட வேண்டும்.	ஒப்புக்கொள்ளப்பட்டது	
1.35	EMP இன் செலவு (மூலதனம் மற்றும் தொடர்ச்சியானது) திட்டச் செலவு மற்றும் முற்போக்கான மற்றும் இறுதி சுரங்க மூடல் திட்டத்தில் சேர்க்கப்பட வேண்டும்.	EMP செலவு விவரங்கள் அத்தியாயம்-2 கொடுக்கப்பட்டுள்ளது	

1.36	ஆர்&ஆர் பற்றிய விவரங்கள். ஆய்வுப் பகுதியில் கண்டறியப்பட்ட மக்கள் தொகையின் (பழங் குடியினர், SC/ST, BPL குடும்பங்கள் உட்பட) தற்போதுள்ள சமூக-பொருளாதார நிலை மற்றும் இடம்பெயர்ந்த மக்களை மீள்குடியேற்றுவதற்கான பரந்த திட்டம், மீள்குடியேற்ற இடம், மாற்று இடம் பற்றிய தரவுகளுடன் விரிவான திட்டக் குறிப்பிட்ட R&R திட்டம் இடம்பெயர்ந்த மக்களுக்கான வாழ்வாதார கவலைகள்/ வேலைவாய்ப்பு, வழங்கப்படும் குடிமை மற்றும் வீட்டு வசதிகள் போன்றவை மற்றும் செலவுகள் மற்றும் R&R திட்டத்தை செயல்படுத்துவதற்கான அட்டவணையுடன் கொடுக்கப்பட வேண்டும்.	இது பொருந்தாது	
1.37	CSR திட்டத்துடன் கிராமங்களின் விவரங்கள் மற்றும் திட்டத்தின் வாழ்நாள் முழுவதும் குறிப்பிட்ட நடவடிக்கைகளுக்கான குறிப்பிட்ட பட்ஜெட் ஒதுக்கீடுகள் (மூலதனம் மற்றும் தொடர்ச்சி) கொடுக்கப்பட வேண்டும்.	CSR விவரங்கள் அத்தியாயம்-11 கொடுக்கப்பட்டுள்ளது	
1.38	கார்ப்பரேட் சுற்றுச்சூழல் பொறுப்பு:	CSR விவரங்கள் அத்தியாயம்-11 கொடுக்கப்பட்டுள்ளது	
1.39	a)இயக்குநர்கள் குழுவால் அங்கீகரிக்கப்பட்ட நன்கு வரையறுக்கப்பட்ட சுற்றுச்சூழல் கொள்கையை நிறுவனம் கொண்டிருக்க வேண்டும்.	சுற்றுச்சூழல் கொள்கை விவரங்கள் அத்தியாயம்- 10 கொடுக்கப்பட்டுள்ளது.	

1.40	b) சுற்றுச்சூழல் கொள்கையானது, சுற்றுச்சூழல் அல்லது வன விதிகள்/நிபந்தனைகள் ஏதேனும் மீறல்கள்/விலகல்/ மீறல்கள் ஆகியவற்றைக் கவனத்தில் கொள்ள நிலையான செயல்பாட்டு செயல்முறை/செயல்முறைகளை பரிந்துரைக்க வேண்டும்.	சுற்றுச்சூழல் கொள்கை விவரங்கள் அத்தியாயம்- 10 கொடுக்கப்பட்டுள்ளது.	
1.41	c) சுற்றுச்சூழல் பிரச்சினைகளைக் கையாள்வதற்கும், சுற்றுச்சூழல் அனுமதி நிபந்தனைகளுக்கு இணங்குவதை உறுதி செய்வதற்கும் நிறுவனத்தின் படிநிலை அமைப்பு அல்லது நிர்வாக ஆணை வழங்கப்பட வேண்டும்	-	
1.42	d) முறையான காசோலைகள் மற்றும் நிலுவைகளைப் பெறுவதற்கு, நிறுவனம் மற்றும்/அல்லது பங்குதாரர்கள் அல்லது பங்குதாரர்களின் இயக்குநர்கள் குழுவிற்கு இணக்கமின்மை/சுற்றுச்சூழல் விதிமுறைகளை மீறுதல் பற்றி நன்கு அறியப்பட்ட அமைப்பைக் கொண்டிருக்க வேண்டும்.	-	
1.43	e) சுற்றுச்சூழல் மேலாண்மை பிரிவு மற்றும் அதன் பொறுப்புகள் EIA/ EMP அறிக்கையில் தெளிவாக குறிப்பிடப்பட வேண்டும்	EMP செல் விவரங்கள் அத்தியாயம்-4 கொடுக்கப்பட்டுள்ளன	
1.44	f) சுற்றுச்சூழல் விதிமுறைகளுக்கு இணங்குவதை சுய கண்காணிப்பின் கட்டமைக்கப் பட்ட முறையில் சுட்டிக்காட்ட வேண்டும்.	ஒப்புக்கொள்ளப்பட்டது	

1.45	திட்டத்தில் தாக்கல் செய்யப்பட்ட / நிலுவையில் உள்ள வழக்குகள் / நீதிமன்ற வழக்குகளின் நிலை வழங்கப்பட வேண்டும்	ஏதும் இல்லை	
1.46	எந்தவொரு தேசிய பூங்கா மற்றும் வனவிலங்கு சரணாலயத்தின் தாழ்வாரத்தின் கீழ் என்னுடையது வராது என்று DFO யிடமிருந்து PP தெளிவுபடுத்தலை, அருகிலுள்ள சரணாலயத்தின் தூரத்தைக் காட்டும் சான்றளிக்கப்பட்ட வரைபடத்துடன் சமர்ப்பிக்க வேண்டும்.	குறித்து கொள்ளப்பட்டது	
1.47	வனத்துறை அனுமதி, சுரங்கத் திட்ட ஒப்புதல், சுரங்க மூடல் திட்ட ஒப்புதல் போன்ற அனுமதிகள்/ஒப்புதல்களின் நகல். நீர்ப்பாசனத் துறையிலிருந்து NOC (தேவைப்பட்டால்) போன்றவை பொருந்தும்.	குறித்து கொள்ளப்பட்டது	
1.48	வன அனுமதி பற்றிய விவரங்கள் கொடுக்கப்பட்ட வடிவத்தின்படி கொடுக்கப்பட வேண்டும்: மொத்த ML மொத்த திட்டப் பகுதி வனம் (ha) நிலம் (ha) FC தேதி வன நில இருப்புப் பகுதியின் பரப்பளவு, அதற்கான FC க்கு இன்னும் விண்ணப்பத்தின் நிலை பெறப்படவில்லை வன நிலம் ஒன்றுக்கு மேற்பட்டவர்கள் ஒவ்வொரு FC விவரங்களையும் வழங்க வேண்டும்.	குறித்து கொள்ளப்பட்டது	
1.49	முன்மொழிவு விரிவாக்கம் செய்யப்பட்டால், சுரங்கத் திட்டம் மற்றும் அங்கீகரிக்கப்பட்ட திட்டத்தின்படி செய்யப்படும் பணியின் நிலை EIA/EMP அறிக்கையில் விவரிக்கப்படும்.	குறித்து கொள்ளப்பட்டது	

1.50	பொது விசாரணை பற்றிய விவரங்கள் செய்தித்தாளில் வெளியிடப்பட்ட அறிவிப்புகள், பொது விசாரணையின் நடவடிக்கைகள்/நிமிடங்கள், பொது மக்களால் எழுப்பப்பட்ட புள்ளிகள் மற்றும் முன்மொழிபவரால் செய்யப்பட்ட வாக்குறுதிகள் மற்றும் பொருத்தமான காலக்கெடுவில் வரவு செலவுத் திட்டங்களுடன் முன்மொழிய ப்பட்ட காலக்கெடு நடவடிக்கை தொடர்பான தகவல்கள் உள்ளடக்கப்பட வேண்டும். இந்த விவரங்கள் அட்டவணை வடிவத்தில் வழங்கப்பட வேண்டும். பொது விசாரணை பிராந்திய மொழியில் இருந்தால், அதன் அங்கீகரிக்கப்பட்ட ஆங்கில மொழிபெயர்ப்பு வழங்கப்பட வேண்டும்.	குறித்து கொள்ளப்பட்டது	
1.51	ட்ரோன் மூலம் குறைந்தபட்சம் 10 நிமிடங்களுக்கு நில யதார்த்தத்தை எடுத்துக்காட்டும் கணக்கெடுப்பை மேற்கொண்டு முன்மொழிபவர் சமர்ப்பிக்க வேண்டும்.	குறித்து கொள்ளப்பட்டது	
1.52	முதல் குத்தகைப் பத்திரம் ஒதுக்கப்பட்ட/பிளாக் ஒதுக்கீடு/ நிலம் அதன் புதுப்பித்தல்களின் எண்ணிக்கையில் இருந்து தொடங்கும் திட்டத்தின் விரிவான காலவரிசை, CTO/CTE. புதுப்பித்தல்கள், முந்தைய) வழங்கிய விவரங்கள் மற்றும் அதன் இணக்க விவரங்கள், வன NOC(கள்), CGWA அனுமதிகள், பவர் அனுமதிகள் போன்ற பல்வேறு அரசாங்க அமைப்புகளின் NOC விவரங்கள் முறையே அட்டவணை வடிவத்தில் வழங்கப்பட வேண்டும்.	குறித்து கொள்ளப்பட்டது	

1.53	EIA/ EMP அறிக்கையின் முதல் பக்கத்தில் உச்ச திறன் உற்பத்தி, பகுதி, PP இன் விவரம், ஆலோசகர் (NABET அங்கீகாரம்) மற்றும் ஆய்வகம் (NABL / MoEF & CC சான்றிதழ்) ஆகியவற்றைக் குறிப்பிட வேண்டும்.	குறித்து கொள்ளப்பட்டது	
1.54	ToR இன் இணக்கங்கள் அட்டவணை வடிவில் அந்தந்த அத்தியாயப் பிரிவு மற்றும் பக்க எண் ஆகியவற்றுடன் சரியாக மேற்கோள் காட்டப்பட வேண்டும், மேலும் EIA-EMP அறிக்கையின் அனைத்து அத்தியாயம், பிரிவில் உள்ள அந்தந்த ToR இன் வரிசையையும் குறிப்பிட வேண்டும்.	குறித்து கொள்ளப்பட்டது	

அத்தியாயம் 1
அறிமுகம்

1.1 அறிக்கையின் நோக்கம்.

சுற்றுச்சூழல் தாக்க மதிப்பீடு (EIA) என்பது நிலையான வளர்ச்சியை உறுதி செய்வதற்கான மேலாண்மை கருவியாகும், மேலும் இது ஒரு செயல் திட்டத்தின் மூலம் சுற்றுச் சூழல், சமூக மற்றும் பொருளாதார தாக்கங்களை முடிவெடுப்பதற்கு முன் கண்டறிய பயன்படுகிறது. இது ஒரு முடிவெடுக்கும் கருவியாகும், இது எந்தவொரு திட்டத்திற்கும் பொருத்தமான முடிவுகளை எடுப்பதில் முடிவெடுப்பவர்களை வழிநடத்துகிறது.

திரு.V.நாகராஜன்,அவர்கள் ,விழுப்புரம் மாவட்டம், புவியியல் மற்றும் சுரங்கத்துறையின் உதவி இயக்குநரிடமிருந்து இருந்து 8,89,700 கனமீட்டர் சாதாரணகல் 96,210 கன மீட்டர் மற்றும் கிராவல் குவாரி செய்வதிற்கு கடிதத்தைப் பெற்றுள்ளது. தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில், நல்முக்கல் கிராமத்தின் சர்வே எண்கள். 34/1B1, 35/2B, 35/3 மற்றும் 35/4 இல் அமைந்துள்ள 4.75.0 ஹெக்டேர் பரப்பளவு. எனவே, 500மீ சுற்றளவில் அமைந்துள்ள பின்வரும் முன்மொழியப்பட்ட மற்றும் கைவிடப்பட்ட குவாரிகள் காரணமாக இந்த முன்மொழியப்பட்ட குவாரி கிளஸ்டர் சூழ்நிலையின் கீழ்வருகிறது. விவரங்கள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை - 1.1 கிளஸ்டர் சுரங்க விவரங்கள்					
வ. எண்	**பெயர் மற்றும் முகவரி**	**கிராமம் & வட்டம்**	**புலஎண்**	**அளவு (Ha)**	**குத்தகை காலம்**
முடிவுற்ற குவாரிகள்					
	இல்லை				
	நடைமுறையில் உள்ள குவாரிகள்				
1	திரு.N.கோபிநாத், த/பெ. நடராஜன், எண்.19, நாட்டாமைகாரர் தெரு, பொலம்பாக்கம் கிராமம், செய்யூர் கிராமம், காஞ்சிபுரம் மாவட்டம்	நல்முக்கல் &, மரக்காணம்	33/5, 37/3, 37/4, 37/5, 37/6 , 37/7	3.35.0	21.03.2022 to 20.03.2027
2	திரு.D.துரை, த/பெ.தனபால் கவுண்டர், கீழருங்குணம் கிராமம், பெருமுக்கல் அஞ்சல், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்.	நல்முக்கல் &, மரக்காணம்	26/1B1, 27/3A, 27/3B	1.20.0	06.12.2022 to 05.12.2027
3	திரு.V.ரவிச்சந்திரன், த/பெ.வரதராஜ் கவுண்டர், எண்.63/19, பெருமுக்கல் கிராமம் & அஞ்சல், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்.	நல்முக்கல் &, மரக்காணம்	26/1B1, 27/3A, 27/3B	1.35.0	29.12.2022 to 28.12.2027

முன்மொழியப்பட்ட குவாரிகள்					
1	திரு.V.நாகராஜன், த/பெ.வரதராஜ் கவுண்டர், எண். 65, மரக்காணம் ரோடு, பெருமுக்கல் கிராமம், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்-604301	நல்முக்கல் & மரக்காணம்	34/1B1, 35/2B, 35/3 மற்றும் 35/4	4.75.0	முன் மொழியப் பட்ட குவாரி

EIA அறிவிப்பு, 2006 மற்றும் அதன் அடுத்தடுத்த திருத்தங்களின் படி முன் மொழியப்பட்ட திரு.V.நாகராஜன் சாதாரண கல் & கிராவல் குவாரி, கிளஸ்டர் அட்டவணை 1(a) கனிமசுரங்கத்தின் கீழ்வருகிறது. மொத்த பரப்பளவான 10.65.0 ஹாக்>5 ஹெக்டேர் என்பதால், இதுB1 வகையின் கீழ்வகைப் படுத்தப்பட்டுள்ளது. கிளஸ்டரில் உள்ள குவாரிகளின் செயற்கைக்கோள் படம் (படம் 1.1) இல் காட்டப்பட்டுள்ளது.

படம் 1.1 கிளஸ்டர் குவாரிகளைக்காட்டும் செயற்கைக் கோள்படம்

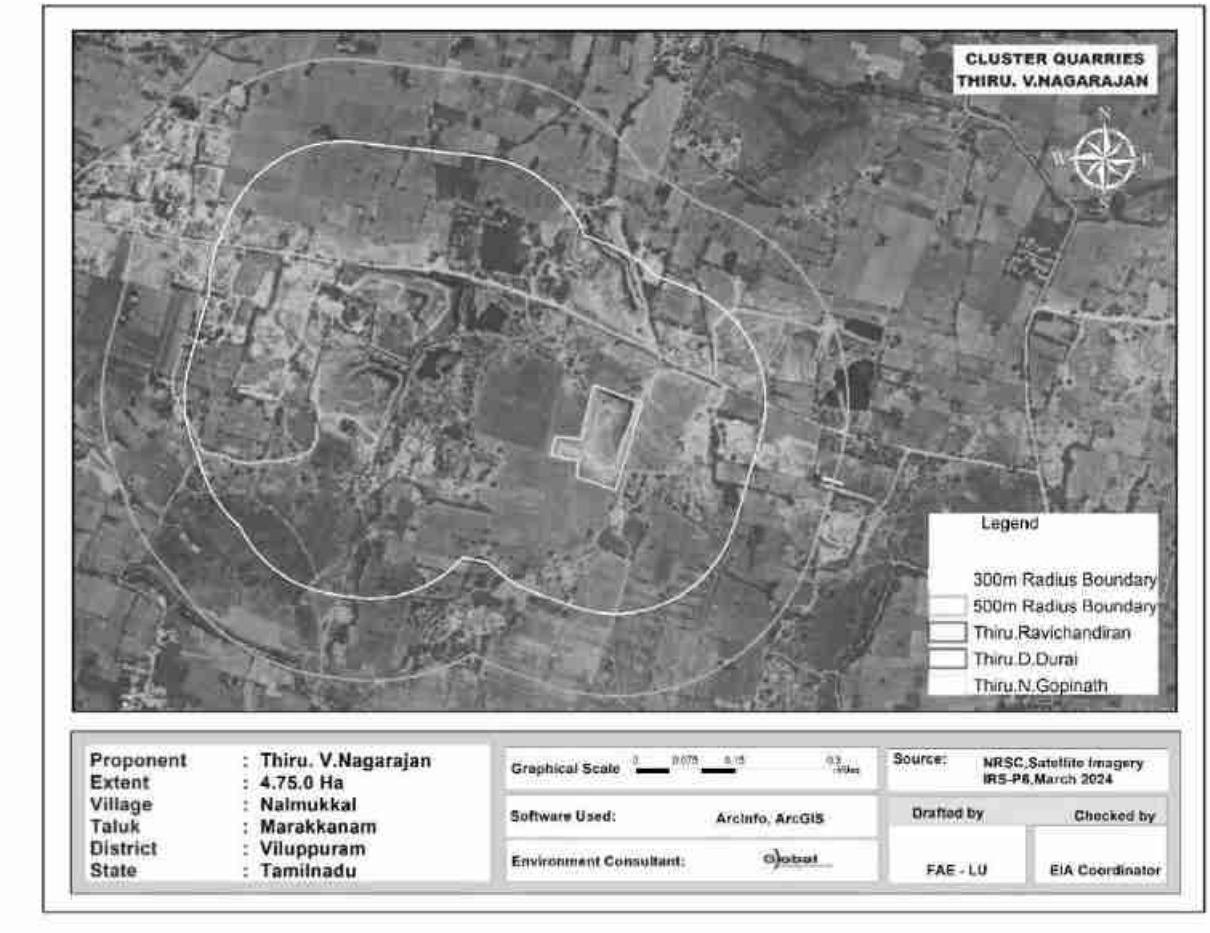

EIA / EMP தயாரிப்பதற்கான ToR, 16.07.2024 தேதியிட்ட ToR அடையாள எண் TO24B0108TN5964918N (F.No.10951) மூலம் அங்கீகரிக்கப்பட்டது. 8,89,700 கனமீட்டர் சாதாரண கல் மற்றும் 96,210 கனமீட்டர் கிராவல் உற்பத்திக்காக அங்கீகரிக்கப்பட்ட TOR இன்படி இந்த அறிக்கை தயாரிக்கப்பட்டுள்ளது.

1.2 திட்டம் மற்றும் திட்ட ஆதரவாளரின் அடையாளம்.

முன்மொழியப்பட்ட திட்டதிலிருந்து சாதாரண கல் மற்றும் கிராவல் குவாரி (கிளஸ்டரின்கீழ்) சுரங்கமாகும். புல எண். 34/1B1, 35/2B, 35/3 மற்றும் 35/4 ஆனது தமிழ்நாடு மாநிலம்,விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் அமைந்துள்ளது. EIA அறிவிப்பு, 2006 மற்றும் அதன் அடுத்தடுத்த திருத்தங்களின் படி திட்டமானது B1 வகையின் கீழ்அட்டவணை 1 (a) இன்கீழ்வருகிறது (குத்தகைபகுதி>5 முதல் 250 ஹெக்டேர்வரை). முன்மொழியப்பட்ட திட்டவிவரங்கள் கீழே கொடுக்கப்பட்டுள்ளன.

(a) முன்மொழியப்பட்ட திட்ட விவரங்கள்

வ.எண்.	விளக்கம்	நிலை/குறிப்புகள்
1.	துறை	நிலகரி அல்லாதவகை
2.	திட்டத்தின் வகை	B1
3.	முன்மொழியப்பட்ட கனிமம்	சாதரண கல் மற்றும் கிராவல் குவாரி
4.	சுரங்க குத்தகை வகை	முன்மொழியப்பட்ட குவாரி
5.	குவாரி குத்தகை அளவு	4.75.0 Ha
6.	முன்மொழியப்பட்ட ஆழம்	38 மீட்டர் தரைமட்டதிற்க்கு கீழ்
7.	சுரங்கமுறை	திறந்தவெளி இயந்திரமக்கபட்ட முறை.
8.	முன்மொழியப்பட்ட காலம்	5 வருடம்
9.	முன்மொழியப்பட்ட சுற்றுச் சூழல் அனுமதி	5 வருடம்
10.	முன்மொழியப்பட்ட உற்பத்தி அளவு	சாதாரணகல்: 8,89,700 கன மீட்டர் கிராவல்: 96,210 கன மீட்டர்

(b) திட்டமுன் மொழிபவரின் சுயவிவரம்.

முன் மொழியப்பட்ட குத்தகைதாரர், திரு.V.நாகராஜன் என்பவர் சாதாரண கல் துறையில் குவாரி, செயல்பாடு மற்றும் சந்தைப்படுத்தல் போன்றவற்றை அடையாளம் காண்பதில் சிறந்த அனுபவமுள்ளவர். முன்மொழியப்பட்ட நிலத்திற்கு சொந்தமான பட்டா நிலம், இணைப்பு எண் –6 ஐப்பார்க்கவும்.

(c) திட்ட முன்மொழிவு விவரங்கள்:

முன்மொழிபவரின் பெயர்	:	திரு.V.நாகராஜன்,
முன்மொழிபவரின் நிலை	:	தனி நபர்
முகவரி	:	திரு.V.நாகராஜன், த/பெ.வரதராஜ் கவுண்டர், எண். 65, மரக்காணம் ரோடு, பெருமுக்கல் கிராமம், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்604301-.

1.3 இயல்பு, அளவு, திட்டத்தின் இருப்பிடம் மற்றும் நாடு, பிராந்தியத்திற்கு அதன் முக்கியத்துவம் பற்றிய சுருக்கமான விளக்கம்

5.0 மீ பெஞ்ச் உயரம் மற்றும் 5 மீ பெஞ்ச் அகலத்தை மற்றும் ஒட்டுமொத்த பெஞ்ச் சாய்வு 45°க்கும் குறைவாக உருவாக்கி, கைதுளைப்பான் கொண்டு துளையிடுதல், வெடித்தல் ஆகியவற்றின் மூலம் திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்க முறை மூலம் குவாரி நடவடிக்கை மேற்கொள்ள உத்தேசிக்கப்பட்டுள்ளது. தோண்டுதல் மற்றும் டிப்பர்கள் ஏற்றுதல் மற்றும் போக்குவரத்திற்காக முன்மொழியப்பட்டுள்ளன.

1.3.1 திட்டத்தின் அளவு மற்றும் இடம்

(a) திட்டத்தின் அளவு

அட்டவணை1.2 முன்மொழியப்பட்ட திட்டத்தின் விளக்கம்

வ.எண்	அம்சங்கள்	விளக்கம்
1	நிலத்தின் வகை	பட்டா நிலம்
2	குத்தகைக்கான அளவு	4.75.0 ஹெக்டேர்
3	குத்தகை வகை	முன்மொழியப்பட்ட குவாரி
4	புவியியல் மொத்த இருப்பு	சாதாரணகல் –21,37,500 கனமீட்டர் கிராவல் - 1,42,500 கனமீட்டர்
5	தோண்டக்கூடிய வளம்	சாதாரணகல் – 10,15,275 கனமீட்டர் கிராவல் –96,210 கனமீட்டர்
6	முன்மொழியப்பட்ட வளம்	சாதாரணகல்: 8,89,700கனமீட்டர் கிராவல்: 96,210 கனமீட்டர்
7	முன்மொழியப்பட்ட ஆழம்	38 மீட்டர் (BGL)

(b) திட்டத்தின் இடம்

முன்மொழியப்பட்ட திட்ட இடம், தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் அமைந்துள்ளது மற்றும் அதன் அட்சரேகை: 12°13'05.24"N முதல் 12°13'14.52"N வரை மற்றும் தீர்க்கரேகை: 79°46'07.17"E முதல் 79°46'16.18"E வரை உள்ளது. சர்வே ஆஃப் இந்தியா டோபோஷீட் எண். 57- P/12.

1.3.2 பிராந்தியத்திற்கான திட்டத்தின் முக்கியத்துவம்

இந்தியாவிலும் பிற நாடுகளிலும் சாதாரண கல்லின் தேவை அதிகரித்து வருகிறது. கட்டுமானத் தொழில் தற்போது வேகமாக வளர்ந்து வருவதால், சாதாரண கல்லின் தேவை அதிகரித்து வருகிறது. இதனால், இத்திட்டம் சாதாரண கல்லின் தேவைக்கு பங்களிப்பது மட்டுமல்லாமல், அருகிலுள்ள கிராமங்களுக்கு வேலை வாய்ப்பையும் வழங்கும்.

1.4 ஆய்வின் நோக்கம் - நடத்தப்பட்ட ஒழுங்குமுறை இணக்கங்கள் விவரங்கள் (குறிப்பு விதிமுறைகளின்படி):

எந்தவொரு சுரங்கத் திட்டமும் அதன் செயல்பாட்டின் போது திட்டதளத்திற்கு அருகில் சுற்றுச்சூழல் பாதிப்புகளை ஏற்படுத்தலாம். சுற்றுச்சூழலின் பல்வேறு கூறுகளின் மீதான தாக்கங்களின் வகை மற்றும் தீவிரம் திட்டத்தின் தன்மை மற்றும் அதன் புவியியல் இருப்பிடத்தைப் பொறுத்துமாறுபடும். இயற்பியல், உயிரியல் மற்றும் சமூக-பொருளாதார சூழல் மீதான சுற்றுச்சூழல் தாக்கமதிப்பீடு (EIA) ஆய்வுகள் மூலம் திட்டத்தின் நிகரதாக்கங்களை அளவிட முடியும். சுற்றுச் சூழலைப்பாதுகாக்க சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தை (EMP) தயாரிப்பதற்கான அடிப்படையை EIA ஆய்வுகள் வழங்குகின்றன.

EIA/EMP தயாரிக்கும் நோக்கத்திற்காக, SEIAA, தமிழ்நாடு ஒருகுறிப்பு விதிமுறைகளை வெளியிட்டுள்ளது EIA அறிவிப்பு 2006 இன்விதிகள் மற்றும் அதன் அடுத்தடுத்த திருத்தங்கள். இந்த EIA ஆய்வில் கோர் மற்றும் பஃபர் மண்டலம், அதாவது குத்தகை பகுதி மற்றும் திட்டப் பகுதியின் 10கிமீ சுற்றளவு ஆகியவை அடங்கும். குளிர்காலத்தில் (மார்ச் முதல் மே 2024 வரை) உருவாக்கப்பட்ட தரவுகளின் அடிப்படையில் தயாரிக்கப்பட்ட இந்த EIA அறிக்கை மற்றும் சுற்றுச்சூழலின் அனைத்து தனிப்பட்ட கூறுகளும் விரிவாக விவரிக்கப்பட்டுள்ளன. பயனுள்ள சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தை உருவாக்க, கிடைக்கக் கூடியத கவல்களின் ஆழமான பகுப்பாய்வு செய்யப்பட்டுள்ளது.

1.4.1 தற்போதைய ஆய்வு

திட்ட உரிமையாளர், இந்த திட்டத்திற்கான சுற்றுச் சூழல்தாக்க மதிப்பீடு / சுற்றுச் சூழல்மேலாண்மை திட்டம் (EIA/EMP) நடத்துவதற்காக தி/ள். குளோபல் மைனிங் சொல்யூஷன்ஸ் சேலம் எனும் நிறுவனத்தை நியமித்துள்ளார். இந்த கிளஸ்டர் குவாரியின் சுற்றுச் சூழல்தாக்கமதிப்பீடு மற்றும் சுற்றுச் சூழல்மேலாண்மை திட்டம் அனைத்து சுற்றுச்சூழல் தொடர்பான பாதிப்புகள் மற்றும் தணிப்பு நடவடிக்கைகளுக்கு தீர்வு காணும். EMP அறிக்கையானது குளிர்காலத்தில் இருந்து (மார்ச் முதல் மே 2024 வரை) தி/ள்.ஷ்ரியண்ட் அனலிட்டிகல் & ரிசர்ச் லேப்ஸ் பிரைவேட் லிமிடெட், சென்னை மற்றும் தி/ள் குளோபல் மைனிங் சொல்யூஷன்ஸ்,சேலம் இன் FAE. ஆல் உருவாக்கப்பட்ட தரவை அடிப்படையாகக் கொண்டு. உருவாக்கப்பட்ட தரவு. இந்த ஆய்வு நடைமுறையில் உள்ள அடிப்படை சுற்றுச் சூழல்நிலைமைகளை மதிப்பீடு செய்கிறது. தற்போதைய ஆய்வின் நோக்கங்கள் கீழே கொடுக்கப்பட்டுள்ளன.

- காற்று, நீர், சத்தம், போக்குவரத்து, பல்லுயிர், சமூக-பொருளாதாரம் போன்ற பல்வேறு சுற்றுச்சூழல் விளக்கங்களுக்கான முதன்மைக்கள கண்காணிப்பு மற்றும் இரண்டாம் நிலைதரவு மூலம் தற்போதைய அடிப்படை சூழ்நிலையை தயார்செய்தல்.
- சுற்றுச்சூழலைத்தாக்கும் சுரங்க செயல்பாடுகளை அடையாளம் காணுதல்.
- முன்மொழியப்பட்ட திட்ட நடவடிக்கைகளின் தாக்கத்தை மதிப்பிடுவதற்கு.
- தடுப்புதணிப்பு நடவடிக்கைகளை பரிந்துரைக்க.
- சுற்றுச்சூழல் கண்காணிப்பு உட்பட ஒருசுற்றுச்சூழல் மேலாண்மை திட்டத்தை (EMP) தயார்செய்ய.
- பேரிடர் மேலாண்மைத் திட்டத்தைத் தயாரிக்க.

1.4.2 வழக்குகளின் நிலை

இது சாதாரண கல் மற்றும் கிராவல் குவாரி திட்டம். இந்தத் திட்டத்திற்கு எதிராக எந்த வழக்கும்/ நீதிமன்ற வழக்கும் நிலுவையில் இல்லை.

(a). சுரங்கதிட்டம் தயார் செய்ய கடிதம்:

திட்ட ஆதரவாளர் விழுப்புரம் மாவட்ட, புவியியல் மற்றும் சுரங்கத்துறையின் உதவி இயக்குநரிடமிருந்து இருந்து Rc.No. A/G&M/96/2021 தேதி;02.02.2024 இல் சுரங்க திட்டம் தயார் செய்யகடிதம் பெற்றுள்ளார். கடித நகல் இணைப்பு - 2 என இணைக்கப்பட்டுள்ளது.

b. சுரங்கத் திட்ட ஒப்புதல் கடிதம்:

திட்ட ஆதரவாளர், தமிழ்நாடு சிறு கனிமச் சலுகை விதிகள், 1959 விதி19, 41 & 42 இன் கீழ் சுரங்கத் திட்டத்தைத் தயாரித்துள்ளார், மேலும் இதற்கு விழுப்புரம் புவியியல் மற்றும் சுரங்கத் துறை உதவி இயக்குநரால் Rc.No. A/G&M/96/2021 தேதி 06.03.2024 மூலம் ஒப்புதல் அளிக்கப்பட்டுள்ளது. அங்கீகரிக்கப்பட்ட திட்டத்துடன் ஒப்புதல்கடிதம் இணைப்பு - 3 ஆக இணைக்கப்பட்டுள்ளது.

c. 500மீ சுற்றளவு குவாரி அம்சங்கள்:

திட்ட ஆதரவாளர், விழுப்புரம் புவியியல் மற்றும் சுரங்கத்துறையின் உதவி இயக்குநரிடமிருந்து RC.No. A/G&M/96/2021 06.03.2024 தேதியிட்ட, என்ற அதிகாரப்பூர்வ கடிதத்தைப் பெற்றுள்ளார். கடிதநகல் இணைப்பு - 4 என இணைக்கப்பட்டுள்ளது.

d. திட்ட ஆதரவாளர் உறுதிமொழி:

திட்ட ஆதரவாளர் MoEF & CC O.M இன் கீழ் ஒருபிரமாண பத்திரத்தை வெளியிட்டுள்ளார். எண். 3-50/2017-IA.III(Pt.) தேதியிட்ட 30.05.2018, 2.08.2017 அன்று W.P. இல் செய்யப்பட்ட மாண்புமிகு எஸ்சியின் வழிகாட்டுதலுக்கு இணங்க. (C) 2014 இன் 114 பொதுகாரணம் மற்றும் யூனியன் ஆஃப் இந்தியா & ஆர்ஸ். உறுதிமொழிநகல் இணைப்பு - 12 ஆக இணைக்கப்பட்டுள்ளது.

(e) முன் மொழியப்பட்ட குத்தகைப் பகுதியின் நில ஆவணம்:

இது விண்ணப்பதாரர் (திரு.V.நாகராஜன்) பெயரில் பதிவு செய்யப்பட்ட பட்டா நிலம். பட்டா எண். 425, நில ஆவணங்களின் (பட்டா, அடங்கல் மற்றும் அ-பதிவு) நகல் இணைப்பு -6 என இணைக்கப்பட்டுள்ளது.

*****

அத்தியாயம் 2
திட்ட விளக்கம்

2.1 திட்டத்தின் வகை

திட்டத்தின் வகையானது, தோண்டுதல், வெடித்தல், ஏற்றுதல் மற்றும் போக்குவரத்து ஆகியவற்றுடன் முன்மொழியப்பட்ட சுரங்ககுத்தகைப் பகுதிக்குள் சாதாரண கல் மற்றும் கிராவல் தோண்டுவதற்கு திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்கமுறையாகும். இந்தத்திட்டம் தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் 4.75.0 ஹெக்டேர் பரப்பளவில் உள்ள புல எண்கள்; 34/1B1, 35/2B, 35/3 மற்றும் 35/4 கொண்டது ஆகும்.

EIA அறிவிப்பு, 2006 மற்றும் அதன் அடுத்தடுத்த திருத்தங்களின் படி திட்டம்1 (a) வகைB1 (குத்தகைபகுதி>5 முதல்250 ஹெக்டேர்வரை (கீழ்வருகிறது, கிளஸ்டர் நிலவரத்தை கருத்தில் கொண்டு மொத்த கிளஸ்டர் பரப்பளவு 10.65.0 ஹெக்டேர் .சுரங்கங்களின் விவரங்கள் கிளஸ்டர் பகுதியில் அமைந்துள்ள உதவிஇயக்குநர், புவியியல் மற்றும் சுரங்கத்துறை, விழுப்புரம் மாவட்டம், கடிதஎண் Rc.No. A/G&M/96/2021 தேதி 06.03.2024 மூலம் 500மீ சுற்றளவு கடிதம் மூலம் சான்றளிக்கப்பட்டது.

அட்டவணை - 2.1 கிளஸ்டர் சுரங்க விவரங்கள்

வ. எண்	பெயர் மற்றும் முகவரி	கிராமம் & வட்டம்	புலஎண்	அளவு (Ha)	குத்தகை காலம்
முடிவுற்ற குவாரிகள்					
	இல்லை				
	நடைமுறையில் உள்ள குவாரிகள்				
1	திரு.N.கோபிநாத், த/பெ. நடராஜன், எண்.19, நாட்டாமைகாரர் தெரு, பொலம்பாக்கம் கிராமம், செய்யூர் கிராமம், காஞ்சிபுரம் மாவட்டம்	நல்முக்கல் &, மரக்காணம்	33/5, 37/3, 37/4, 37/5, 37/6 , 37/7	3.35.0	21.03.2022 to 20.03.2027
2	திரு.D.துரை, த/பெ.தனபால் கவுண்டர், கீழருங்குணம் கிராமம், பெருமுக்கல் அஞ்சல், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்.	நல்முக்கல் &, மரக்காணம்	26/1B1, 27/3A, 27/3B	1.20.0	06.12.2022 to 05.12.2027
3	திரு.V.ரவிச்சந்திரன், த/பெ.வரதராஜ் கவுண்டர், எண்.63/19, பெருமுக்கல் கிராமம் & அஞ்சல், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்.	நல்முக்கல் &, மரக்காணம்	26/1B1, 27/3A, 27/3B	1.35.0	29.12.2022 to 28.12.2027
முன்மொழியப்பட்ட குவாரிகள்					
1	திரு.V.நாகராஜன், த/பெ.வரதராஜ் கவுண்டர், எண். 65, மரக்காணம் ரோடு, பெருமுக்கல் கிராமம், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்-604301	நல்முக்கல் & மரக்காணம்	34/1B1, 35/2B, 35/3 மற்றும் 35/4	4.75.0	முன் மொழியப் பட்ட குவாரி

முன்மொழியப்பட்ட உற்பத்தி 8,89,700 கனமீட்டர் சாதாரணகல் மற்றும் 96,210 கனமீட்டர் கிராவல் ஆகும்.

2.2 திட்டத்தின் தேவை

முன்மொழியப்பட்ட குத்தகைதாரர். திரு.V.நாகராஜன், குவாரியின் முக்கிய அம்சங்கள்.

அட்டவணை 2.1.a திட்டத்தின் முக்கிய அம்சங்கள்

வ. எண்	விளக்கம்	நிலை/குறிப்புகள்
1	துறை	நிலகரி அல்லாத வகை
2	புதிய/ஏற்கனவே உள்ள திட்டம்	புதிய திட்டம்
3	திட்டத்தின்வகை	B1
4	கனிமத்தின் வகை	சிறு கனிமம்
5	குவாரி காலம்	10 வருடம்
6	முன்மொழியப் பட்ட உற்பத்தி அளவு	சாதாரணகல்: 8,89,700 கன மீட்டர் கிராவல்: 96,210 கன மீட்டர்
7	கழிவு உற்பத்தி மற்றும் மேலாண்மை	இல்லை
8	பெஞ்ச் உயரம் மற்றும் அகலம்	முன்மொழியப்பட்ட பெஞ்ச் உயரம் மற்றும் அகலம் முறையே 5.0மீட்டர் மற்றும் முன்மொழியப்பட்ட பெஞ்சுகளின் எண்ணிக்கை 10 எண்கள் (தரைமட்டத்திருக்கு கீழ்)
9	இறுதிஆழம்	38 மீட்டர் (தரைமட்டத்திருக்கு கீழ்)
10	இறுதி பயன்பாடு	தோண்டப்பட்ட சாதாரணகல் மற்றும் கிராவல், அரசு மற்றும் பொதுத்துறை திட்டங்களுக்கு கட்டுமானத் தொழில்களுக்குப் பயன்படுத்தப்படுகிறது, மேலும் மாவட்டம் முழவதும் மற்றும் அதைச்சுற்றியுள்ள வீட்டுவசதி மற்றும் உள்கட்டமைப்புத் திட்டங்களுக்குப் பயன்படுத்தப்படுகிறது.

2.3 இடம் (பொது இடம், குறிப்பிட்ட இடம், திட்ட எல்லை & திட்ட தள தளவமைப்பு ஆகியவற்றைக் காட்டும் வரைபடங்கள்):

தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டதில் உள்ள நல்முக்கல் கிராமத்தில் இந்த திட்டத் தளம் அமைந்துள்ளது. அருகிலுள்ள ரயில் பாதை விழுப்புரம் - சென்னை பாதை ஆகும், இது பகுதியின் வடமேற்கு பகுதியில் சுமார் 10 கிமீ தொலைவில் உள்ளது. தேசிய நெடுஞ்சாலை (NH-179B) சென்னை - திருவண்ணாமலை பகுதியின் வடமேற்கு பகுதியில் சுமார் 9.3 கி.மீ தொலைவில் உள்ளது. மாநில நெடுஞ்சாலை (SH-134) திண்டிவனம் - மரக்காணம் பகுதியின் தென்மேற்கு பகுதியில் சுமார் 2.0 கி.மீ. பொதுவான இடம் படம் 2.1 இல் கொடுக்கப்பட்டுள்ளது. திட்டப் பகுதியின் வரைபடம் படம் 2.2 இல் கொடுக்கப்பட்டுள்ளது.

படம் 2.1 இட வரைபடம்

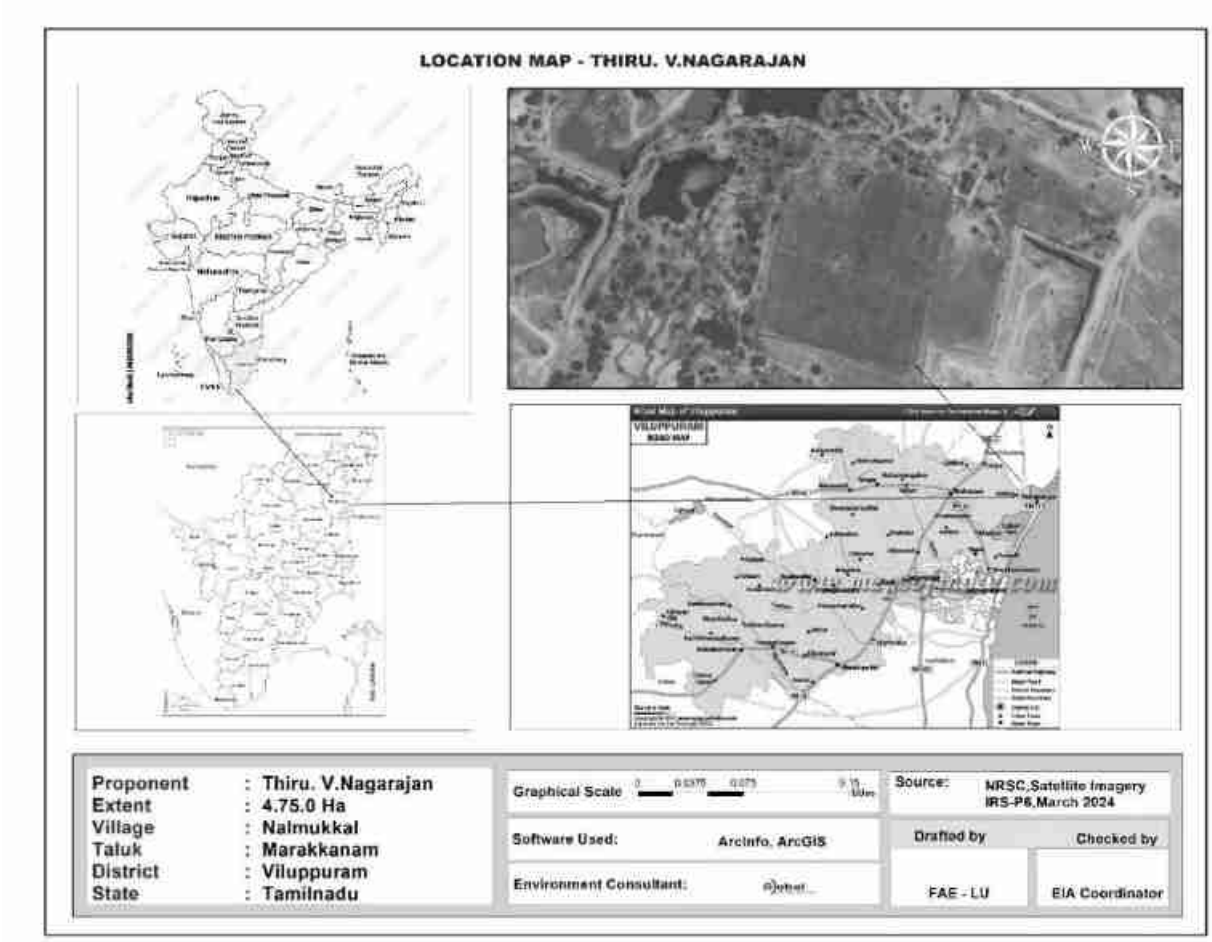

அட்டவணை 2.2 திட்டத்தின் எல்லை ஒருங்கிணைப்புகள்			
மூலைகள்	ஒருங்கிணைப்பான்கள்		மூலைகளுக்கு இடையே உள்ள தூரம்
	அட்சரேகை	தீர்க்கரேகை	
1	12° 13' 06.70"N	79° 46' 08.42"E	1-2 = 136.8m
2	12° 13' 10.99"N	79° 46' 09.64"E	2-3 = 77.6m
3	12° 13' 11.68"N	79° 46' 07.17"E	3-4 = 22.0m
4	12° 13' 12.34"N	79° 46' 07.46"E	4-5 = 20.8m
5	12° 13' 13.00"N	79° 46' 07.60"E	5-6 = 59.0m
6	12° 13' 12.66"N	79° 46' 09.52"E	6-7 = 49.2m
7	12° 13' 14.23"N	79° 46' 09.82"E	7-8 = 21.2m
8	12° 13' 14.04"N	79° 46' 10.49"E	8-9 = 15.2m
9	12° 13' 14.52"N	79° 46' 10.61"E	9-10 = 180.2m
10	12° 13' 12.41"N	79° 46' 16.18"E	10-11 = 15.2m
11	12° 13' 11.96"N	79° 46' 15.97"E	11-12 = 20.0m
12	12° 13' 11.31"N	79° 46' 15.92"E	12-13 = 61.6m
13	12° 13' 09.35"N	79° 46' 15.46"E	13-14 = 132.0m
14	12° 13' 05.24"N	79° 46' 14.18"E	14-1 = 179.8m

படம் 2.2 திட்டத் தளத்தைக் காட்டும் கூகுள் படம்

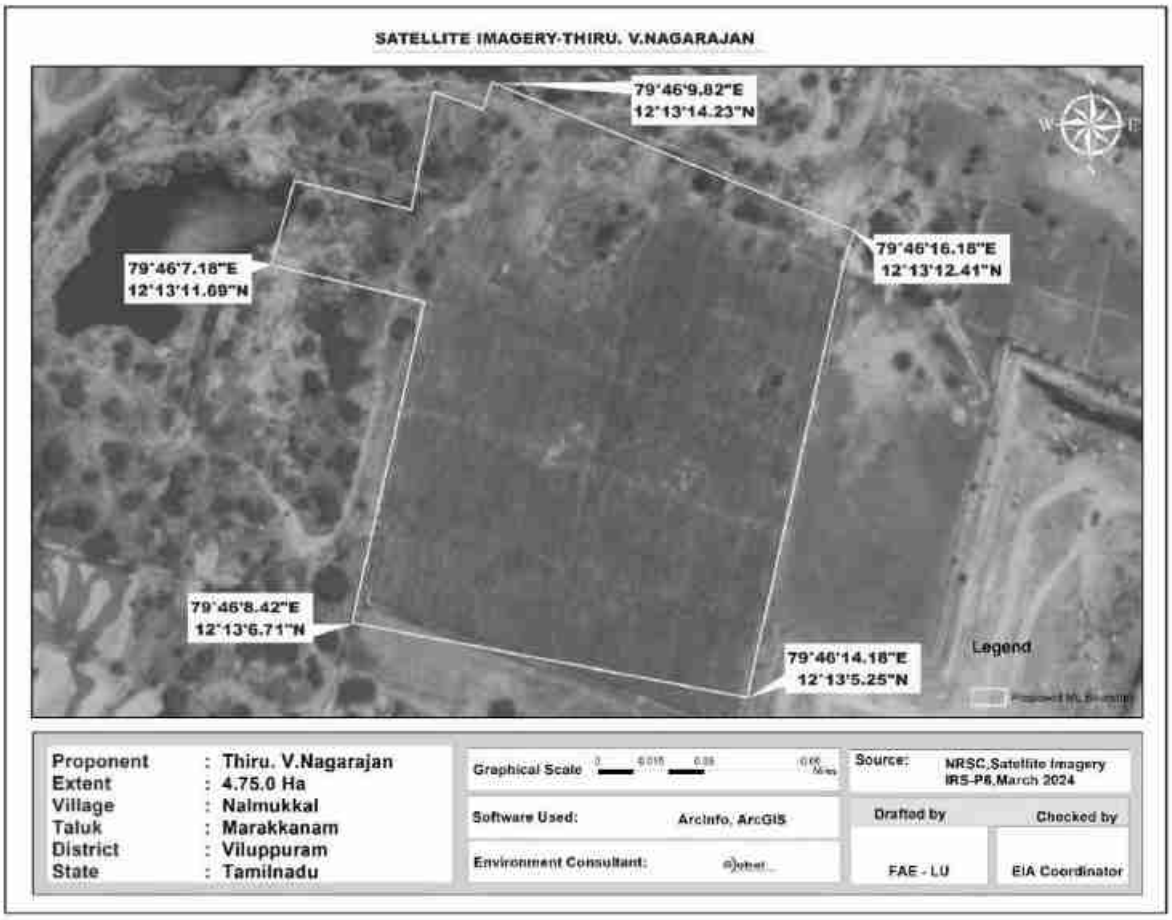

படம் 2.3 திட்டப் பகுதியின் மேற்பரப்புத் திட்டம்

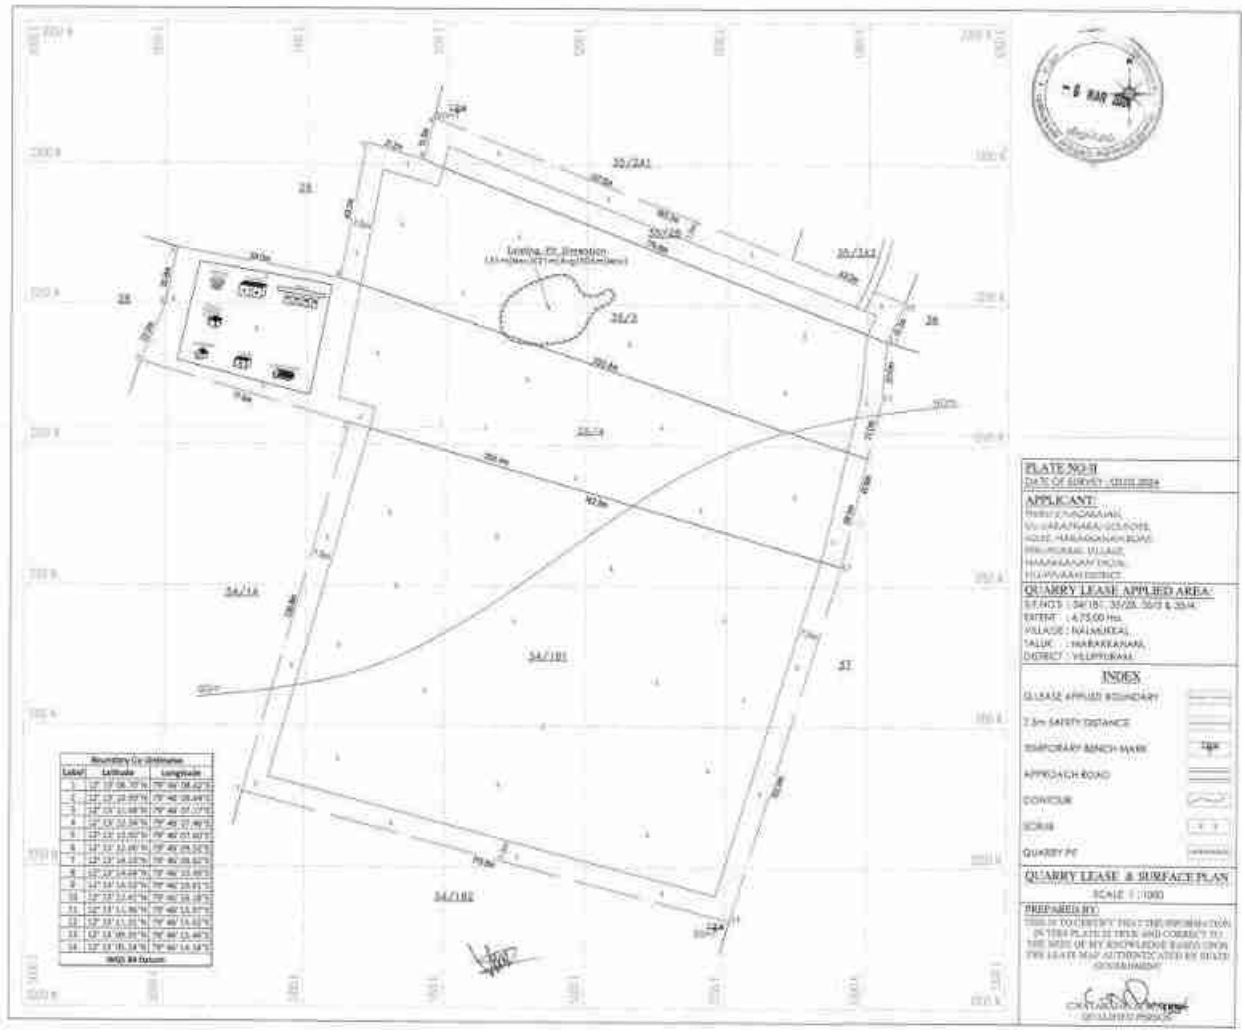

படம் - 2.4 திட்டப் பகுதியின் புவியியல் வரைபடம்

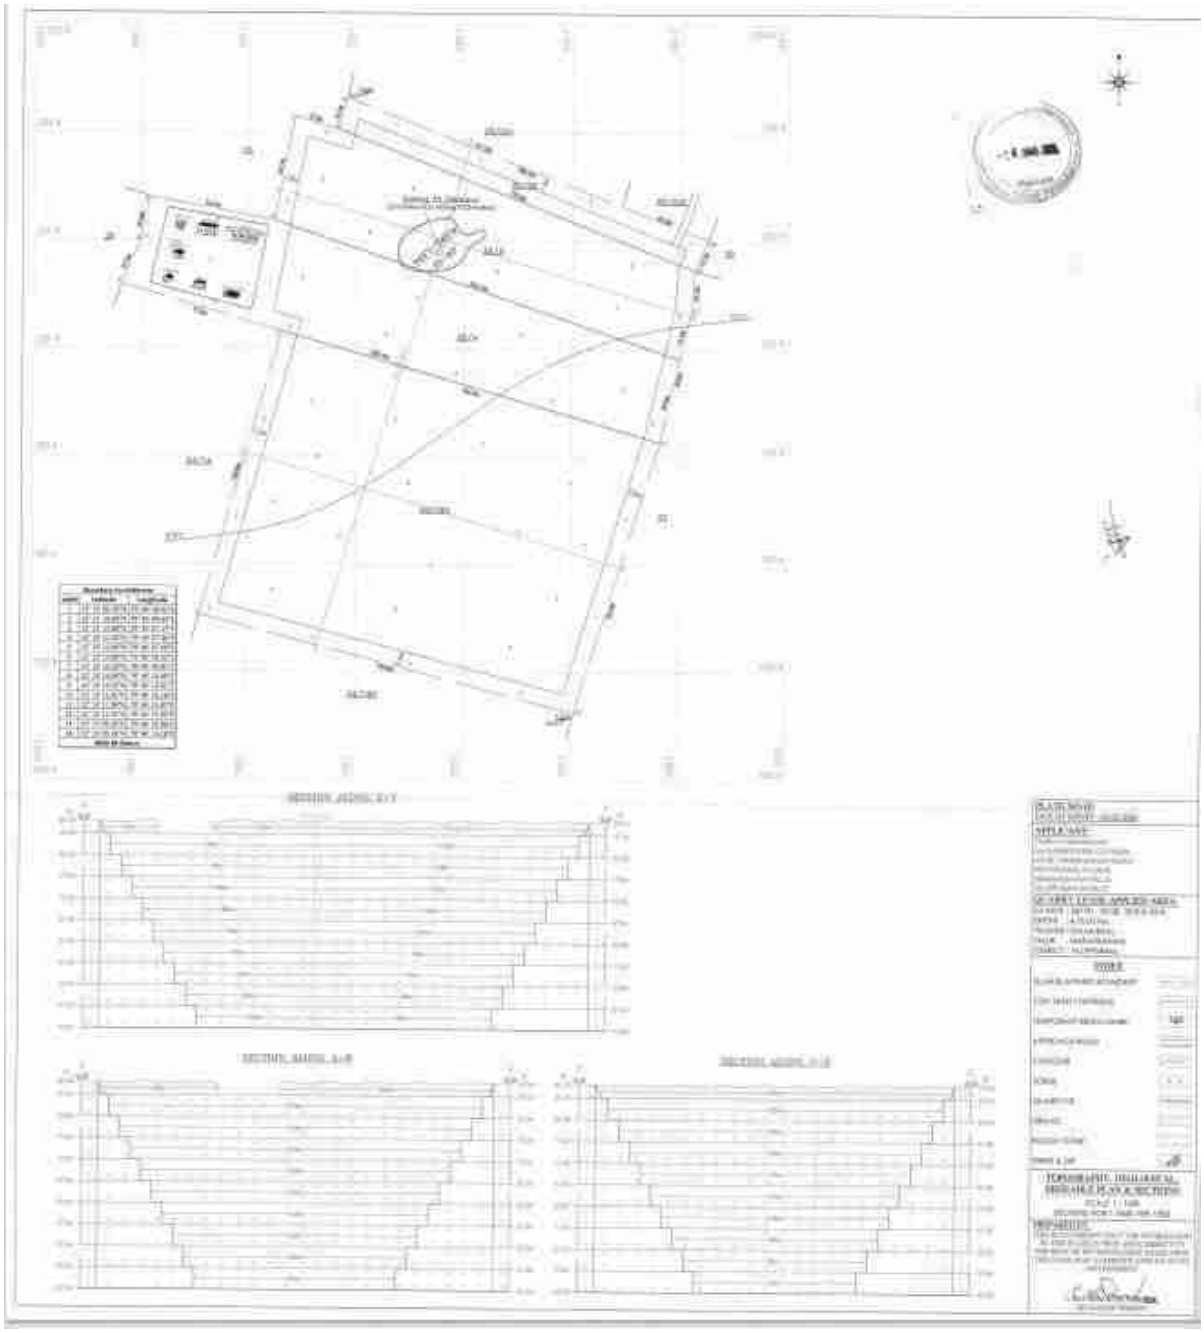

2..3.1 திட்டப் பகுதியின் நிலப் பயன்பாடு

முன்மொழியப்பட்ட சுரங்க குத்தகை பகுதி பட்டா நிலம் மற்றும் திட்ட தளத்தின் நிலபயன்பாட்டு முறை அட்டவணை2.3 கீழே கொடுக்கப்பட்டுள்ளது.

அட்டவணை 2.3 தற்போதைய நில பயன்பாட்டு முறை			
வ.எண்	**நிலத்தின் பயன்**	**தற்போதைய நிலை (ஹெக்டேர்)**	**குவாரி காலத்தில் பயன்பாட்டில் உள்ள பகுதி(ஹெக்டேர்)**
1	குவாரிகுழி	0.06.50	3.86.00
2	உள்கட்டமைப்பு	-	0.02.00
3	சாலைகள்	-	0.01.00
4	பச்சை வளையம்	-	0.86.00
5	பயன்படுத்தப்படாதது	4.68.50	-
	மொத்தம்	**4.75.00**	**4.75.00**

2.3.2 சுரங்கம் மூடும் கட்டத்தில் நிலபயன்பாடு

அட்டவணை 2.4 சுரங்கம் மூடும் கட்டத்தில் நிலபயன்பாடு		
வ.எண்	**நிலத்தின் பயன்**	**குவாரி காலத்தில் பயன்பாட்டில் உள்ள பகுதி (ஹெக்டேர்)**
1	நீர்நிலைக்கு விடப்பட்ட பகுதி	3.86.00
2	பச்சை வளையம்	0.86.00
3	மீதமுள்ளபகுதி	0.03.00
மொத்தம்		**4.75.00**

2.3.3குத்தகைப் பகுதியின் முக்கிய அம்சங்கள்

வ. எண்	அம்சங்கள்	விளக்கம்
1	அருகிலுள்ள சாலை	• திட்ட பகுதியில் இருந்து அரியந்தாங்கல் - செனலூர் கிராம சாலைக்கு வடக்கே செல்லும் சாலை உள்ளது. • அருகிலுள்ள இரயில் பாதை விழுப்புரத்திலிருந்து சென்னைக்கு வடமேற்குப் பகுதியில் சுமார் 10 கி.மீ தொலைவில் உள்ளது. • தேசிய நெடுஞ்சாலை (NH-179B) சென்னை - திருவண்ணாமலை பகுதியின் வடமேற்கு பகுதியில் 9.3 கி.மீ. • மாநில நெடுஞ்சாலை ((SH-134) திண்டிவனம் - மரக்காணம் பகுதியின் தென்மேற்குப் பகுதியில் சுமார் 2.0 கி.மீ.
2	அருகில் உள்ள கிராமம்	நல்முக்கல் -1.32 கிமீ தெற்கு
3	அருகிலுள்ள இரயில்வே நிலையம்	விழுப்புரம் - 10 கிமீ – வடமேற்கு
4	அருகில் உள்ள விமான நிலையம்	புதுச்சேரி விமானநிலையம் – 28.53 கிமீ– தெற்கு.

படம் 2.5 ஏற்கனவே உள்ள தள அம்சங்களைக் காட்டும் டோபோ வரைபடம்

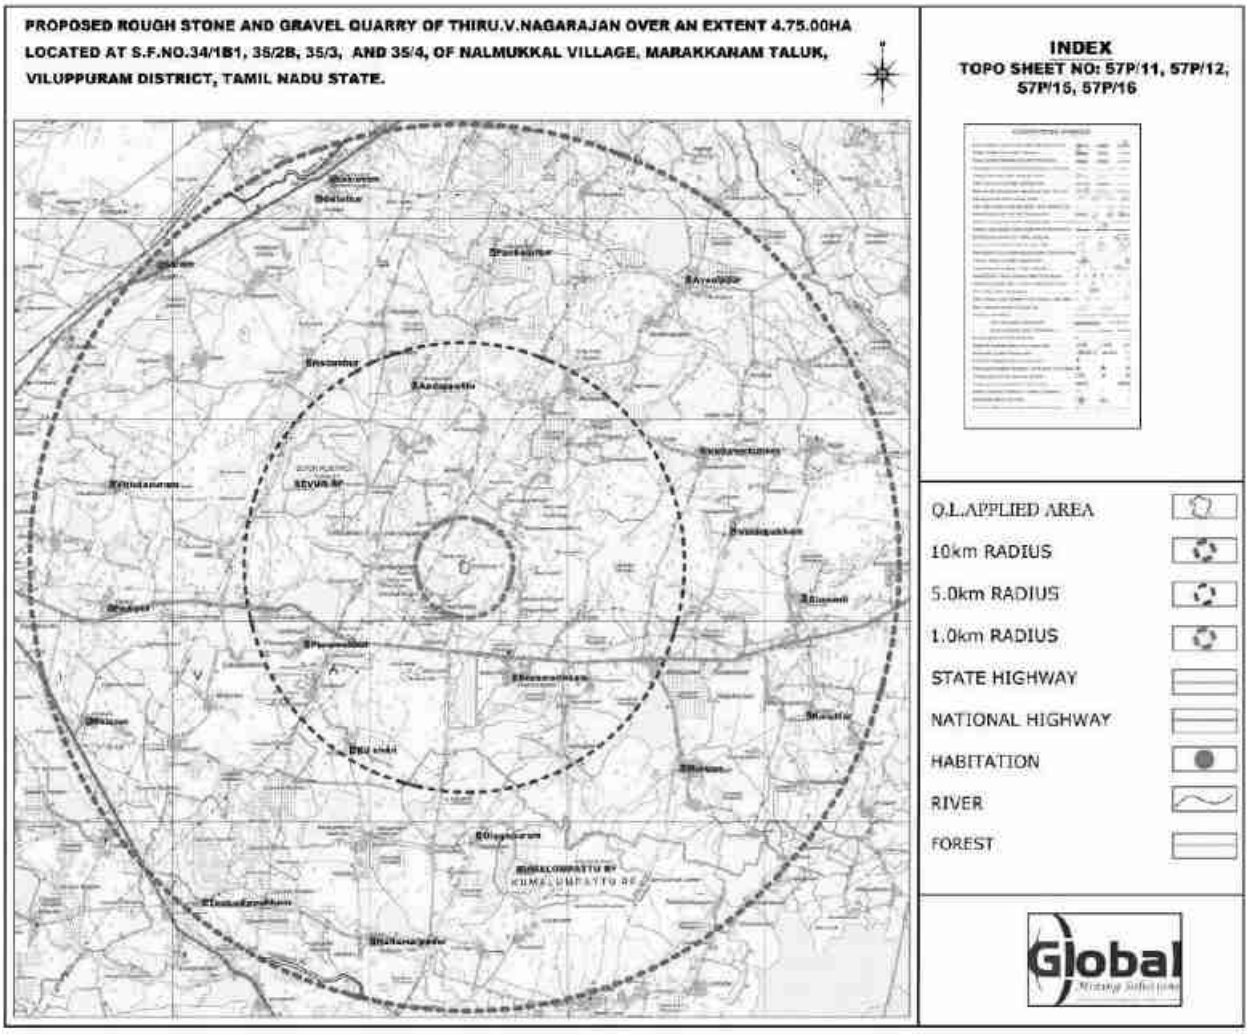

படம் 2.6 திட்ட தள புகைப்படங்கள்

2.4 செயல்பாட்டின் அளவு அல்லது அளவு (திட்டம் அல்லது திட்டத்திற்குத் தேவைப்படும் தொடர்புடைய செயல்பாடுகள் உட்பட):

முன்மொழியப்பட்ட உற்பத்தியானது திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்க முறையின் மூலம் சாதாரண கல் 8,89,700 கன மீட்டர் மற்றும் 96,210 கன மீட்டர் கிராவல் ஆகும். கிடைக்கும் புவியியல் வளங்கள் சாதாரண கல் 21,37,500 கன மீட்டர் மற்றும் கிராவல் 1,42,500 கன மீட்டர். திட்டத்தின் செலவு நிலத்தின் விலை உட்பட ரூ.565.95 இலட்சம். EMPக்கான மூலதனச் செலவு ரூ. 132.58 லட்சம் மற்றும் EMPக்கான தொடர் செலவு ரூ. 54.54 லட்சம்/ஆண்டு.

2.4.1 சட்டரீதியான அனுமதிகளின் நிலை, அனுமதிகள், மறுப்புச் சான்றிதழ், ஒப்புதல்:

கீழே உள்ள அட்டவணையில் கொடுக்கப்பட்டுள்ள பல்வேறு சட்டங்கள், விதிகள் மற்றும் ஒழுங்குமுறைகளின் கீழ் இந்தத் திட்டத்திற்குத் தேவையான அனைத்து சட்டரீதியான அனுமதிகள், தடையில்லாச் சான்றிதழ்கள், ஒப்புதல்கள் போன்றவற்றைப் பெற்ற பிறகு சுரங்கத் திட்டம் செயல்படுத்தப்படும்.

அட்டவணை - 2.5 சட்டரீதியான அனுமதிகள், அனுமதிகள், என்ஓசி, ஒப்புதல்களின் நிலை

வ.எண்	அம்சங்கள்	நிலை
1	சுரங்கத் திட்ட ஒப்புதல் நிலை	திட்ட ஆதரவாளர், தமிழ்நாடு சிறு கனிமச் சலுகை விதிகள், 1959 விதி19, 41 & 42 இன் கீழ் சுரங்கத் திட்டத்தைத் தயாரித்துள்ளார், மேலும் இதற்கு விழுப்புரம் புவியியல் மற்றும் சுரங்கத் துறை உதவி இயக்குநரால் Rc.No. A/G&M/96/2021 தேதி 06.03.2024 மூலம் ஒப்புதல் அளிக்கப்பட்டுள்ளது.
2	சுற்றுச்சூழல் அனுமதி நிலை	16.07.2024 தேதியிட்ட ToR அடையாள எண் . TO24B0108TN5964918N(F.No.10951) மூலம் திட்டத்தின் EIA/EMP அறிக்கையைத் தயாரிப்பதற்கான ToR அங்கீகரிக்கப்பட்டது.
3	(CTE) நிறுவுவதற்கு ஒப்புதல் வழங்குதல்	சுற்று சூழல் அனுமதி பெறப்பட்ட பின் 30 நாளுக்குள் (காலம் TNPCB நிபத்தனை படி)
4	செயல்பட ஒப்புதல் வழங்குதல் (CTO)	சுற்று சூழல் அனுமதி பெறப்பட்ட பின் 30 நாளுக்குள் (காலம் TNPCB நிபத்தனை படி)

2.5 ஒப்புதல் மற்றும் அமலாக்கத்திற்கான முன்மொழியப்பட்ட அட்டவணை

முன்மொழியப்பட்ட சுரங்கத் திட்டத்தின் ஒப்புதலுக்கான முன்மொழியப்பட்ட அட்டவணை பின்வருமாறு கொடுக்கப்பட்டுள்ளது:

அட்டவணை - 2.6 ஒப்புதலுக்கான முன்மொழியப்பட்ட அட்டவணை

வ.எண்	செயல்பாடு விளக்கம்	அக்டோபர் 2024	நவம்பர் 2024	டிசம்பர் 2024	ஜனவரி 2025
1	SEIAA-TN க்கு இறுதி EIA/EMP அறிக்கையை சமர்ப்பித்தல்				
2	SEAC ஆல் ECக்கான பரிசீலனை				
3	SEIA க்கு SEAC இன் பரிந்துரை				
4	SEIAA மூலம் சுற்று சூழல் அனுமதி				

முன்மொழியப்பட்ட அட்டவணை EIA அறிவிப்பு, 2006ன் படி தயாரிக்கப்பட்டுள்ளது.

குறிப்பு: 21.05.2024 அன்று பரிவேஷ் போர்ட்டலில் விண்ணப்பம் சமர்ப்பிக்கப்பட்டது, 16.07.2024 அன்று ToR வழங்கப்பட்டது. கோடை காலத்தில் (மார்ச் முதல் மே 2024 வரை) அடிப்படை தரவு சேகரிப்பு. காற்று (தடுப்பு மற்றும் கட்டுப்பாடு சட்டம்) 1981 மற்றும் பிரிவு 25/26 நீர் (மாசு தடுப்பு மற்றும் கட்டுப்பாடு சட்டம்) 1974 இன் பிரிவு 21 இன் கீழ் SEIAA-TN, CTE மற்றும் CTO இலிருந்து EC ஐப் பெற்ற பிறகு, தமிழ்நாடு மாநில மாசுக் கட்டுப்பாட்டு வாரியத்திடம் (TNPCB).

2.5.1 செயல்படுத்தல்

முன்மொழியப்பட்ட சுரங்கத் திட்டத்தைச் செயல்படுத்துவது, சுரங்க நடவடிக்கைகளில் பொருந்தக்கூடிய தற்போதைய சட்டங்கள் மற்றும் விதிகளின்படியும், மத்திய அல்லது மாநில அரசு அவ்வப்போது வெளியிடும் எந்தச் சட்டம்/விதி/வழிகாட்டுதல்களின் படியும் சுரங்கத் திட்டம் உதவி இயக்குனர், புவியியல் மற்றும் சுரங்கத் துறை, விழுப்புரம், Rc.எண். A/G&M/96/2011 தேதி 06.03.2024 படியும் செய்யப்படும்.

2.6 தொழில்நுட்பம் மற்றும் செயல்முறை விளக்கம்

2.6.1 திட்டத்திற்கான அடிப்படைத் தேவைகள்

நீர், மின்சாரம், மனித சக்தி, எரிபொருள், விநியோக ஆதாரத்துடன் கூடிய இயந்திரங்கள் போன்ற திட்டத் தேவைகள் கீழே உள்ள பிரிவுகளில் விவரிக்கப்பட்டுள்ளன.

2.6.2 தண்ணீர் தேவைகள்

முன்மொழியப்பட்ட சுரங்கங்களில் நீர் முக்கியமாக உபயோகத்திற்கும், தூசியை அடக்குவதற்கும் மற்றும் தோட்டக்கலைக்கும் பயன்படுத்தப்படும். திட்டத்திற்கான மொத்த நீர் தேவை 4.2 KLD ஆகும், இது வெளி நிறுவனங்களில் இருந்து பெறப்படும். 1.0 KLD அளவுள்ள புறக்கணிக்கத்தக்க கழிவுநீர் உருவாகும், இதற்காக ஊறவைக்கும் குழியுடன் கூடிய செப்டிக் டேங்க் அமைக்கப்படும். நீர் சமநிலை வரைபடம் கீழே கொடுக்கப்பட்டுள்ளது.

படம் 2.7 நீர் இருப்பு வரைபடம்

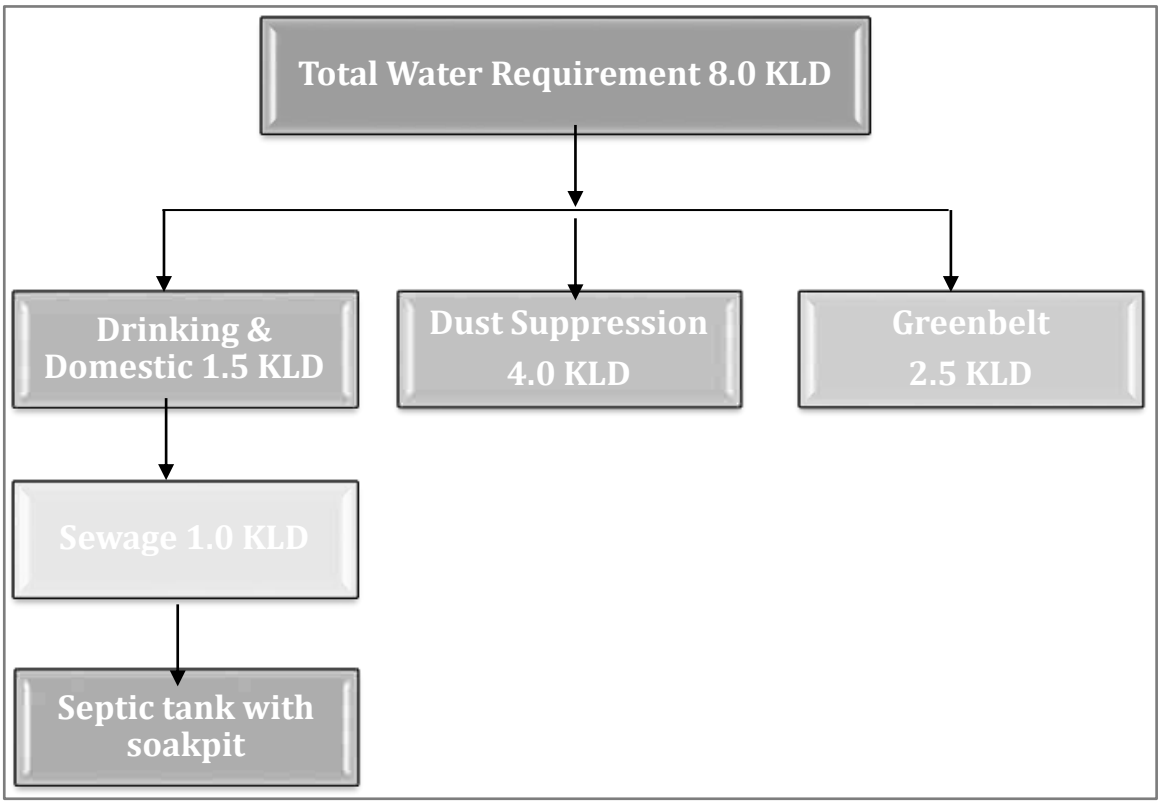

அட்டவணை - 2.7 தண்ணீர் தேவை

வ.எண்	அம்சங்கள்	தண்ணீர் தேவை (KLD)
1	தூசி அடக்குமுறை	4.0
2	குடிநீர்/ அத்தியாவசிய	1.5
3	கிரீன் வளையம் / தோட்டம்	2.5
மொத்தம்		**8.0**

2.6.3 சக்தி தேவை

திட்டத்தின் முழு ஆயுளுக்கும் மொத்த எரிபொருள் தேவை 727.795 KL ஆகும். அலுவலக கட்டிடத்தில் மட்டுமே மின்சாரம் பயன்படுத்தப்படும்

2.6.4 மனித சக்தி தேவை

மொத்த மனிதவளத் தேவை 43 நபர்களாக இருக்கும், அதில் 29 நபர்கள் (சுரங்க மேலாளர், போர்மேன், மைனிங் மேட், முதலியன) மற்றும் மற்றவர்கள் ஓட்டுநர்கள் மற்றும் பணியாளர்கள். இது தவிர, 14 தொழிலாளர்கள் ஓட்டுநர்கள் மற்றும் வேலையாட்களாக இருப்பர். உள்ளூர்வாசிகளுக்கு அவர்களின் தகுதிக்கேற்ப முன்னுரிமை அளிக்கப்படும்.

வ.எண்	விளக்கம்	வேலை வாய்ப்பு
1	சுரங்க மேலாளர்	1
2	போர்மன்/ மேட்	3
3	ஆப்பரேடர்	18
4	மெகானிக்	1
5	ஓட்டுனர்	6
6	வேலையாள்	14
	மொத்தம்	**43 Nos**

2.6.5 இயந்திரமயமாக்கலின் அளவு

அட்டவணை 2.8 திட்டத்தில் ஈடுபட உள்ள இயந்திரங்கள்				
வ. எண்	**உபகரணத்தின் பெயர்**	**திறன்**	**இயங்கும் ஆற்றல்**	**எண்ணிக்கை**
1.	கைதுளைப்பான்	-	அழுத்தப்பட்டகாற்று	16
2.	அமுக்கிகள்	1 psi	டீசல்	4
3.	வாளியுடன் கூடிய எக்ஸ்காவ்வேடர் மற்றும் ராக்பிரேக்கர்	0.9 கனமீட்டர்	டீசல்	2
4.	டிப்பர்கள்	5/10 டன்	டீசல்	6

குறிப்பு: ML பகுதியில் சாதாரண கல் உற்பத்திக்கான மொத்த பொருள் கையாளுதல் தேவைகளுக்கு மேற்கூறிய திறன்களின் சுரங்க உபகரணங்கள் போதுமானவை.

2.6.6 புவியியல் மற்றும் நிலப்பரப்பு

புவி தோற்றம்:

4.75.0 ஹெக்டேர் சுரங்க குத்தகைப் பகுதியானது சர்வே ஆஃப் இந்தியா டோபோஷீட் 57 P/16 இல் உள்ளடக்கப்பட்டுள்ளது அட்சரேகை: 12°13'05.24"N முதல் 12°13'14.52"N வரை மற்றும் தீர்க்கரேகை: 79°46'07.17"E முதல் 79°46'16.18"E வரை. குத்தகைக்கு விடப்பட்ட பகுதிக்கு அருகில் நதி எதுவும் இல்லை. நீர்மட்டம் 68மீ ஆழத்தில் காணப்படுகிறது. கோடை காலத்தில் இப்பகுதியின் வெப்பநிலை 18^0C முதல் அதிகபட்சமாக 42^0C வரை இருக்கும். வடகிழக்கு மற்றும் தென்மேற்கு பருவமழைகள் இரண்டிலும் இந்தப் பகுதியில் 800 மிமீ முதல் 900 மிமீ வரை மழை பெய்யும். முன்மொழியப்பட்ட குவாரியின் குத்தகைப் பகுதியைக்காட்டும் டோபோ வரைபடம் படம் 2.2 இல்கொடுக்கப்பட்டுள்ளது மற்றும் முன்மொழியப்பட்ட குத்தகைப் பகுதியைக் காட்டும் செயற்கைக்கோள் வரைபடம் படம் 2.3 இல்கொடுக்கப்பட்டுள்ளது.

முன்மொழியப்பட்ட குவாரியின் உயரம் கடல் மட்டத்தில் இருந்து 90 மீ (அதிகபட்சம்) ஆகும். சுரங்க குத்தகை பகுதியில் வனநிலம் இல்லை. திட்டத்தளம் வறண்ட நிலம், இது எந்தப் பயிர்ச் செய்கைக்கும் பொருந்தாது.

2.6.7 பிராந்திய புவியியல்

மைய மற்றும் 10 கிமீ இடையக மண்டல புவியியல் அம்சங்கள் (படம் 2.8) விழுப்புரம் மாவட்டம் பெரும்பாலும் தெற்கு கிரானுலைட் டெரெய்ன் சூப்பர் குரூப் (SGT) இன் லித்தாலஜிகளால் அடிக்கோடிட்டுள்ளதைக் காட்டுகிறது. கோண்டலைட் குழுவின் சுண்ணாம்புக் கல்லுடன் கூடிய கால்க் கிரானுலைட் முகையூருக்கு வடக்கே உள்ளது. Charnockite குழுவில் Charnockite, banded magnetite quartzite மற்றும் pyrixene granulite போன்ற 3 லித்தாலஜிகள் உள்ளன. சார்னோக்கைட் வளட்டிக்கு வடக்கே காணபடுகிறது மற்றும் விக்கிரவாண்டி முதல் ஒல்லக்கூர் வரை பெரிய பகுதியை உள்ளடக்கியது. பைராக்ஸீன் கிரானுலைட்டின் பேண்ட் பெரும்பாலும் வளட்டிக்கு அருகிலுள்ள மாவட்டத்தின் NW பகுதிகளிலும், ஒதியத்தூருக்கு மேற்கே சில திட்டுகள் ஏற்படுகின்றன. மிக்மாடைட் குழுவில் பயோடைட் க்னீஸ் உள்ளது, இது மாவட்டத்தின் மத்திய மற்றும் வடகிழக்கு பகுதிகளான முத்தூர் மற்றும் முகையூர் மற்றும் வளட்டி மற்றும் அதைச் சுற்றியுள்ள பகுதிகளில் பெரிய பரப்பளவைக் கொண்டுள்ளது. விக்கிரவாண்டியின் கிழக்கில் லீனியர் பேண்டாக கிரே ஹார்ன்ப்ளெண்டே பயோடைட் க்னீஸ் காணபடுகிறது. முகையூர் முதல் செஞ்சிக்கு வடக்கே மாவட்டத்தின் பெரிய பகுதியில் ஹார்ன்ப்ளென்ட் பயோடைட் க்னீஸ் காணபடுகிறது. ஒலக்கூரின் தெற்கிலும். இளஞ்சிவப்பு மிக்மாடைட்டின் பேண்ட் செஞ்சியின் NE மற்றும் வாலட்டியின் NW இல் காணபடுகின்றன. வாலட்டிக்கு மேற்கில் உள்ள மிக்மாடைட் குழுமத்தின் பயோடைட் க்னீஸில் உள்ள க்ளோஸ்பெட் கிரானைட் வயதுடைய ஆர்க்கியன் முதல் பேலியோபுரோடெரோசோயிக் வரை. ப்ரோடெரோசோயிக் எபிடோட் ஹார்ன்ப்ளெண்டே க்னீஸ் செஞ்சி மற்றும் அதைச் சுற்றியுள்ள பகுதிகளில் வெட்டுதல் நடவடிக்கையுடன் ஏற்படுகிறது. டோலரைட் டைக்குகள் போன்ற வயதுடைய அடிப்படை ஊடுருவும் மெசொப்ரோடெரோசோயிக் தெற்கு கிரானுலைட் நிலப்பரப்பின் பாறைகளுக்குள் ஊடுருவி, இந்த டைக்குகள் NW-SE லிருந்து E-W திசையில் உள்ளன.

கார்போனிஃபெரஸ்-ஆரம்பகால பிரீமியன், தல்சீர் உருவாக்கத்தின் பாறாங்கல் கூட்டமைப்பு, ஒலக்கூர் மற்றும் ஓங்கூர் அருகே மாவட்டத்தின் வடக்குப் பகுதியில் உள்ள நேரியல் பெல்ட்டில் நிகழ்கிறது. பிற்பகுதியில் கிரெட்டேசியஸ் காலத்தில் பாண்டிச்சேரி குழு உள்ளது, இது சேண்ட் ஸ்டோன்-ஷேல் வரிசையைக் கொண்டுள்ளது மற்றும் வானூர் மற்றும் நேசல் என பிரிக்கப்பட்டுள்ளது. பாண்டிச்சேரி குழுவைக் கொண்டுள்ளது மற்றும் இது கராசூர் மற்றும் மணவெளி வடிவங்களாகப் பிரிக்கப்பட்டுள்ளது, இதில் சுண்ணாம்பு மற்றும் களிமண் போன்ற கற்கள் உள்ளன மற்றும் வானூரின் கிழக்கில் உள்ளன. மியோசீன்-பிலியோசீன் காலமானது தடிமனான வண்டல் வரிசையின் படிவுகளால் குறிக்கப்படுகிறது மற்றும் பனம்பாறை வகை மற்றும் கடலூர் வகை என வகைப்படுத்தப்பட்டுள்ளது மற்றும் சேண்ட் ஸ்டோன், கோங்க்லமெரட் போன்ற கற்கள் உள்ளன.

படம் 2.8 திட்டப் பகுதியிலிருந்து 10 கிமீ சுற்றளவு பிராந்திய புவியியல்

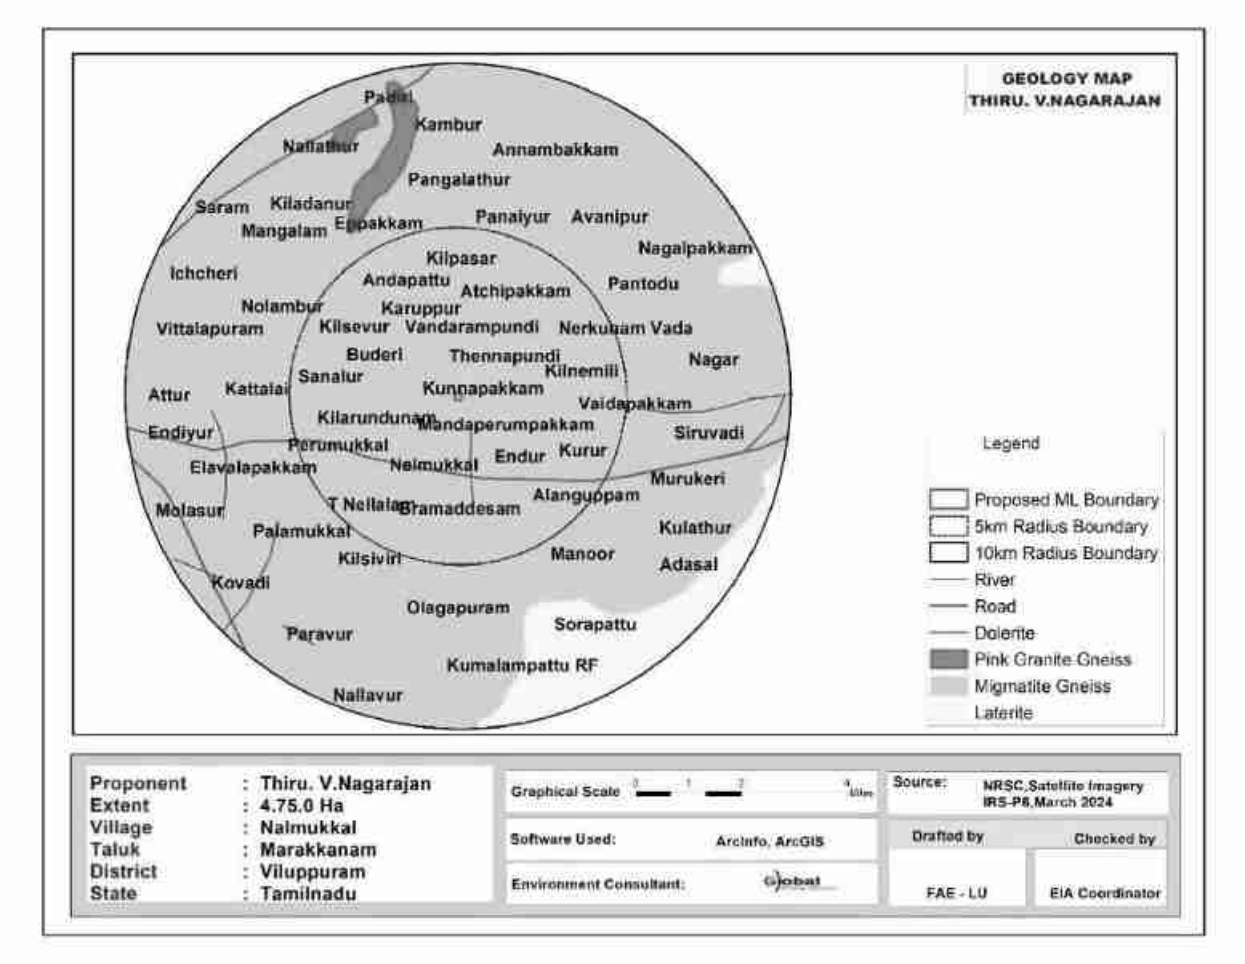

2.6.8 திட்ட பகுதியின் புவியியல்

இப்பகுதி பெனிசுளார் க்னீசிக் காம்ப்ளக்ஸ் பரவலான உருமாற்றப் பாறைகளால் கொண்டுள்ளது. இந்த பாறைகள் பரவலாக பாரைசிதைவு மற்றும் வண்டல் மூலம் சமீபத்திய பள்ளத்தாக்கு நிரப்பபடுகின்றன. இம்மாவட்டத்தில் காணப்படும் புவியியல் அமைப்புகளான நெய்சிக், கிரானைட்டுகள், சார்னோகைட்ஸ், கிரானுலைட்டுகள் மற்றும் கால்க்-நெய்ஸ்கள் போன்ற ஆர்க்கியன் பாறைகள் ஆகும். இளைய வயதுடைய குவார்ட்ஸ் மற்றும் பெக்மாடைட் ஆகும். குத்தகைக்கு எடுக்கப்பட்ட பகுதியில் காணப்படும் பாறை வகை சார்னோகைட் ஆகும், இதில் பெரும்பாலும் குவார்ட்ஸ் மற்றும் ஃபெல்ட்ஸ்பார் சில ஃபெரோமக்னேசிய கனிமங்கள் உள்ளன. சார்னோகைட் பெனிசுளார் க்னீசிக் காம்ப்ளக்ஸ் ஒரு பகுதியாகும், இது உயர்தர உருமாற்ற பாறை ஆகும். சார்னோகைட் உருவாக்கத்தின் தள போக்கு N45^{0}E – S45^{0}W மற்றும் SE80^{0}நோக்கி டிப்பிங். இப்பகுதியின் பொதுவான புவியியல் தொடர்ச்சி கீழே கொடுக்கப்பட்டுள்ளது.

பாறை உருவாக்கம்

வயது

அண்மையில் மேல் மண்

தொடர்பின்மை

அர்க்கியன் டோலிரிட்

சார்னோகைட்
பெனிசுளார் க்னீசிக் காம்ப்ளக்ஸ்

2.7 திட்ட விவரம், திட்டம் போன்றவற்றின் கூறுகளைக் காட்டுவது வரைதல் உள்ளிட்ட திட்ட விளக்கம்

2.7.1 செயல்முறை விளக்கம்

சுரங்கமுறை

5.0 மீ உயரம் 5.0 மீ அகலம் மற்றும் ஒட்டுமொத்தமாக, 45^0 சாய்வுடன் பெஞ்ச் இயந்திரமயமாக்கப்பட்ட சுரங்கத்தின் வழக்கமான திறந்த வெளிமுறை. சாதாரணகல் – 8,89,700 கனமீட்டர் சாதாரணகல் மற்றும் 96,210 கனமீட்டர் கிரவலை தோண்ட உத்தேசிக்கப்பட்டுள்ளது. மொத்தப் உற்பத்தி சாதாரண கல் மற்றும் கிராவல் மட்டுமே என்பதால் வீண்விரயம் ஏற்படாது.

நேரம்

சுரங்கம் ஒரேஷிப்ட் அடிப்படையில் மேற்கொள்ளப்படும். நேரம் காலை 8 மணி முதல் மதியம் 1 மணி மற்றும் பிற்பகல் 2 மணி முதல் மாலை 5 மணிவரை 8 மணிநேரம் இருக்கும். மதிய உணவு நேரம் மதியம் 1 மணி முதல் 2 மணி வரை வழங்கப்படும். சூரிய உதயம் மற்றும் சூரிய அஸ்தமனத்தைப் பொறுத்து பருவத்திற்குப் பருவத்திற்கு நேரம் மாறுபடலாம். வாரத்தில் ஒருநாள் விடுமுறையாக அறிவிக்கப்படும்.

பெஞ்ச் ஜியோமெட்ரி:

பெஞ்ச் உயரம், அகலம் முறையே 5மீட்டர் அளவுகளில் பராமரிக்கபடுகிறது, ஒட்டுமொத்த சாய்வுகோணம் கிடைமட்டத்துடன் சுமார் 45^0ஆகஇருக்கும்.

சுரங்கமுகங்களின் வளர்ச்சி

முன்மொழியப்பட்ட சுரங்கமுறை திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்கமாகும். புதர்களை சுத்தம் செய்தல், அணுகுசாலை, அலுவலகம் மற்றும் சுகாதாரவசதிகள் தயாரித்தல், இவை அனைத்தும் சுற்றுச்சூழல் அனுமதி, செயல்பட ஒப்புதல், குத்தகைபத்திரம் போன்ற அனைத்து சட்டரீதியான அனுமதிகளையும் பெற்ற பிறகு குவாரி பணியை தொடங்கும். மார்ச் 2025 இல்எதிர்பார்க்கப்படுகிறது.

துளையிடுதல் & வெடித்தல்

38 மீட்டர் (BGL) - வரை தோண்டுதல் அதிகபட்ச ஆழம் மற்றும் துளையிடல் விட்டம் 32-36மிமீ இருக்கும். தண்ணீர் தெளிப்புடன் துளையிடுவதற்கு கைதுளைப்பான் பயன்படுத்தப்படும். அத்தகைய கடினமான பாறையை உடைப்பதற்கான வெடிமருந்துகள் பயன்படுத்தபடுகின்றன, வெடிமருந்துகளின் தூள்காரணி ஒருகிலோ வெடிமருந்துகளுக்கு 6 முதல் 7 டன்கள் வரை கிடைக்கும். சிறிய விட்டம் 25 மிமீ வெடிமருந்து, சாதாரண கல்லை அகற்றுவதற்கு உடைக்க மற்றும் ஹீவிங் விளைவுக்காக பயன்படுத்த பரிந்துரைக்கப்படுகிறது. படம் 2.9 ஆக கொடுக்கப்பட்டுள்ளது.

படம் 2.9 வெடித்தலின் நிலை.

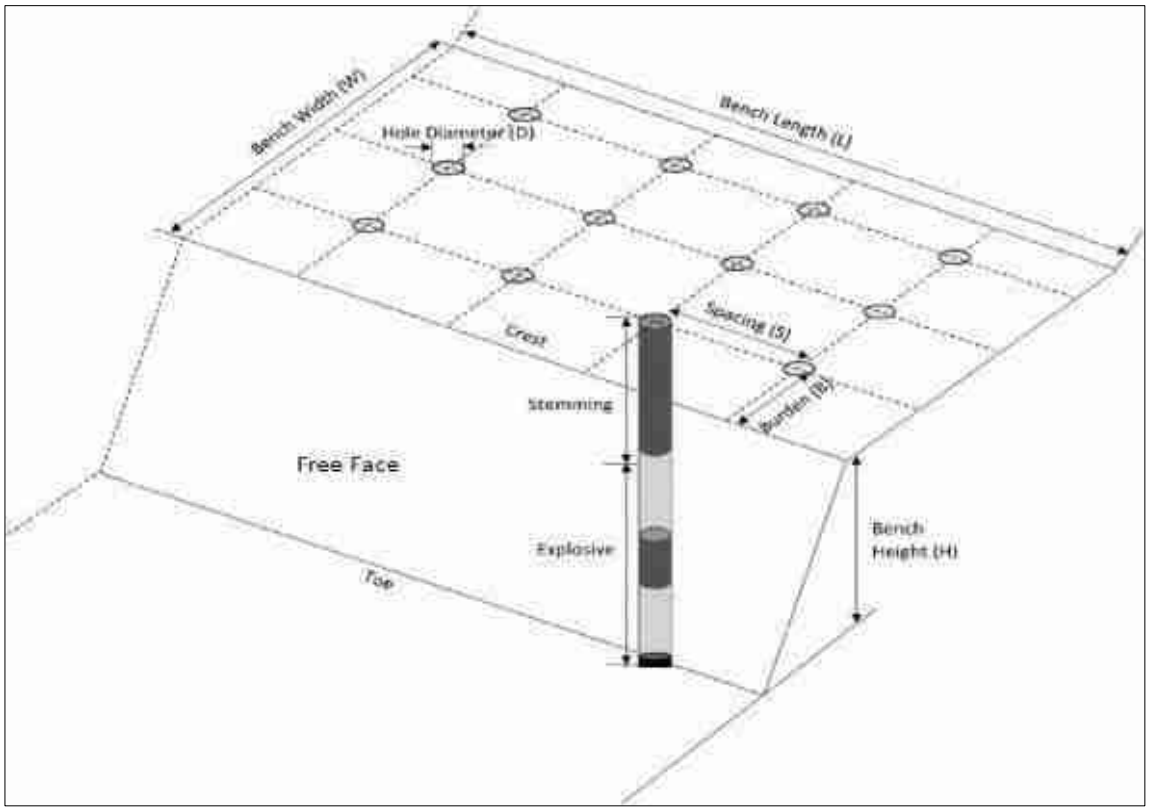

சாதாரணகல் மற்றும் கிராவல் ஏற்றுதல் மற்றும் போக்குவரத்து செயல்முறை விளக்கம்:

சாதாரணகல் மற்றும் கிராவல் ஏற்றுவதற்கும் எக்ஸ்காவ்வேடர் பயன் படுத்தப்படும். 6 டிப்பர்கள் (5/10 டன் திறன்கொண்ட) பயன்படுத்தப்படும்.

படம் 2.10 குவாரி செயல்பாட்டின் ஓட்ட விளக்கப்படம்

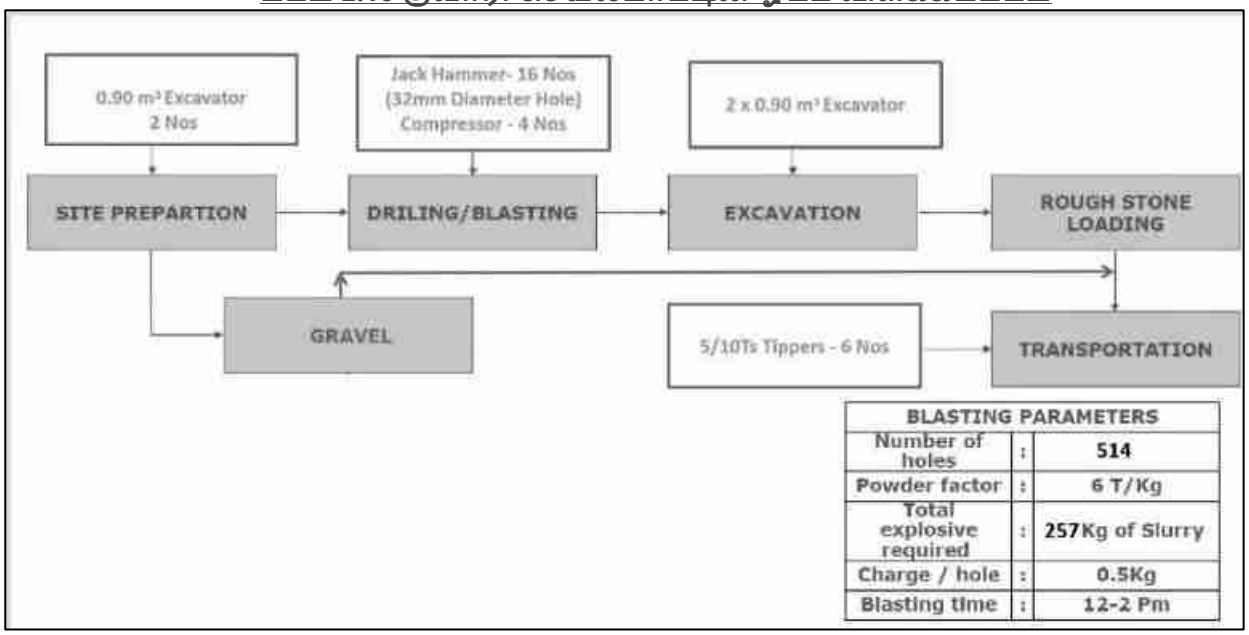

அட்டவணை - 2.9 சுரங்க விவரங்கள்

வ.எண்	விளக்கம்	விவரங்கள்	குறிப்பு
1.	சுரங்கமுறை	5.0 மீ உயரம் 5.0 மீ அகலம் மற்றும் பெஞ்சின் ஒட்டுமொத்த 45^0 சாய்வு கொண்ட இயந்திரமயமாக்கப்பட்ட சுரங்கத்தின் திறந்தவெளி முறை. அகழ்வாராய்ச்சிக்கு ஹைட்ராலிக் அகழ்வாராய்ச்சி பயன்படுத்தப்படும் மற்றும் 5/10T டிப்பர்கள் கடத்தலுக்கு பயன்படுத்தப்படும்.	ஸ்காவ்வேடர்–2No டிப்பர் - 6 No.
2.	கனிமத்தின் பயன்	தோண்டப்படும் சாதாரண கல் மற்றும் கிராவல், அரசு மற்றும் பொதுத்துறை திட்டங்களுக்கான கட்டுமானத் தொழில்களுக்குப் பயன்படுத்தப்படும், மேலும் மாவட்டம் மற்றும் அதைச் சுற்றியுள்ள உள்நாட்டு வீட்டுவசதி மற்றும் உள்கட்டமைப்புத் திட்டங்களுக்குப் பயன்படுத்தப்படும்.	-

3.	முன்மொழியப்பட்ட ஆழம்	38 மீட்டர் BGL	
4.	முன்மொழியப்பட்ட உற்பத்தி	சாதாரணகல்: 8,89,700 கனமீட்டர் கிராவல்: 96,210 கனமீட்டர்	ஐந்து வருடம்
5.	பாதுகாப்பு பகுதி	4.75.0 ஹெக்டேரில், 0.86.0 ஹெக்டேர் சுரங்க நடவடிக்கையின் போது மற்றும் திட்டத்தின் இறுதி நிலையிலும் பாதுகாப்பு மண்டலமாக பராமரிக்கப்படும்.	சுமார் 2400 எண்கள். இந்த பாதுகாப்பில் மரக்கன்றுகள் நடப்படும்
6.	தண்ணீர் தேவை	8.0 KLD	வெளியில் தண்ணீர் விற்பனை செய்பவர்களிடம் இருந்து கொள்முதல் செய்யப்படுகிறது
7.	சக்தி தேவை	திட்டத்தின் முழு ஆயுளுக்கும் மொத்த எரிபொருள் தேவை 727.7995 KL ஆகும்.	அனைத்து உபகரணங்களும் டீசல் மூலம் இயக்கப்படும். சுரங்க நடவடிக்கைக்கு மின்சாரம் தேவையில்லை
8.	மனிதவளம்	இத்திட்டத்தின் மூலம் 43 பேருக்கு வேலை வாய்ப்பு கிடைக்கும்	
9.	நேரம்	பொதுவான	8.00 AM – 5.00 PM
10.	திட்ட செலவு	Rs. 132,58,000/-	(நிலையான சொத்து + செயல்பாட்டு & EMP செலவு உட்பட)
11.	EMP செலவு	433.95 லச்சம்	5 வருடம்
12.	CERதொகை	CER 8.0 லட்சம்.	இத்தொகை அருகில் உள்ள அரசு பள்ளிகளின் வளர்ச்சிக்கு பயன்படுத்தப்படும்.

2.7.2 ஆண்டு வாரியான உற்பத்தி செயல்படுத்துவதற்கான முன்மொழியப்பட்ட அட்டவணை

ஆண்டு வாரியாக இப்பகுதியில் இருந்து சாதாரண கல் உற்பத்தி அதிகபட்ச திறன்வரை இருக்கும். மீட்புகாரணி 100% வரை உள்ளது, எனவே எந்த கழிவுகளும் உருவாக்கப்படாது. தோண்டப்பட்ட அனைத்து அளவுகளும் விற்பனைக்கு உள்ளன. சுரங்க திட்டகாலத்தில் முன்மொழியப்பட்ட வளர்ச்சி மற்றும் உற்பத்தியின் சுருக்கம் அட்டவணை2.10 இல் கொடுக்கப்பட்டுள்ளது.

அட்டவணை 2.10 - 5 ஆண்டுகளுக்கு உற்பத்தியின் சுருக்கம்

வருடம்	பிரிவு	பெஞ்ச்	நீளம் (மீ)	அகலம் (மீ)	ஆழம் (மீ)	கன அளவு (கன மீட்டர்)	கிராவல் (கன மீட்டர்)	சாதாரண கல் (கன மீட்டர்)
I	XY-AB	I	68	154	3	31416	31416	-
		II	90	174	5	78300	-	78300
		III	85	164	5	69700	-	69700
		IV	38	154	5	29260	-	29260
	மொத்தம்						**31416**	**177260**
II	XY-AB	I	5	154	3	2310	2310	-
		II	5	174	5	4350	-	4350
		III	5	164	5	4100	-	4100
		IV	47	154	5	36190	-	36190
	XY-CD	I	61	164	3	30012	30012	-
		II	61	155	5	47275	-	47275
		III	61	145	5	44225	-	44225
		IV	61	135	5	41175	-	41175
	மொத்தம்						**32322**	**177315**
III	XY-CD	I	66	164	3	32472	32472	-
		II	62	155	5	48050	-	48050
		III	57	145	5	41325	-	41325
		IV	52	135	5	35100	-	35100
		V	86	125	5	53750	-	53750
	மொத்தம்						**32472**	**178225**
IV	XY-CD	V	22	125	5	13750	-	13750
		VI	98	115	5	56350	-	56350
	XY-AB	V	80	144	5	57600	-	57600
		VI	75	134	5	50250	-	50250
	மொத்தம்							**177950**
V	XY-CD	VI	5	115	5	2875	-	2875
		VII	98	105	5	51450	-	51450
		VIII	93	95	5	44175	-	44175
	XY-AB	VII	70	124	5	43400	-	43400
		VIII	65	114	5	37050	-	37050
	மொத்தம்							**178950**
மொத்த மொத்தம்							**96210**	**889700**

2.7.3 குவாரியின் இறுதிநிலை காலம்:

குவாரியின் இறுதி நிலைகட்டத்தில், வெட்டியெடுக்கப்பட்ட பகுதி நீர் தேக்கமாக மாற்றப்படும் மற்றும் பாதுகாப்பு வலயமாக மாற்றப்படும் மற்றும் இறுதியில் மேல் பெஞ்சுகள் தோட்டக்கலைக்குபயன்படுத்தப்படும். பாசன நோக்கத்திற்காக அல்லது உள்ளூர் மக்களின் விருப்பத்திற்கேற்ப தண்ணீரை வழங்குவதன் மூலம் குத்தகைதாரரின் சமூகப் பொருளாதார மற்றும் பெருநிறுவன சமூகப் பொறுப்பாகவும் இது செயல்படும். நிலத்தடி நீரை நிரப்பவும் இது உதவும். சுரங்க குத்தகை பகுதியின் கருத்தியல் திட்டம் மற்றும் பகுதி படம் 2.11 இல் கொடுக்கப்பட்டுள்ளது. இறுதி நிலையில் உள்ள குவாரியின் இறுதி அளவு மற்றும் அளவு கீழே அட்டவணை 2.11 ஆகவும், நில பயன்பாட்டு முறை அட்டவணை 2.3 ஆகவும் கொடுக்கப்பட்டுள்ளது. இறுதி நிலை திட்டம் படம் 2.11 ஆக கொடுக்கப்பட்டுள்ளது.

அட்டவணை 2.11 இறுதிநிலை குழி விவரம்			
குழி எண்	**நீளம் (மீ)**	**அகலம் (மீ)**	**ஆழம் (மீ)**
இறுதிநிலை குழி விவரம் சுரங்கதிட்டம் முடியும் போது			
I	227	170	38 மீட்டர் (தரை மட்டத்திருக்கு கீழ்) –
இறுதிநிலை குழி விவரம் குவாரி குத்தகை காலம் முடியும் போது			
I	227	170	48 மீட்டர் (தரை மட்டத்திருக்கு கீழ்) –

படம் 2.11 குவாரியின் இறுதி நிலை

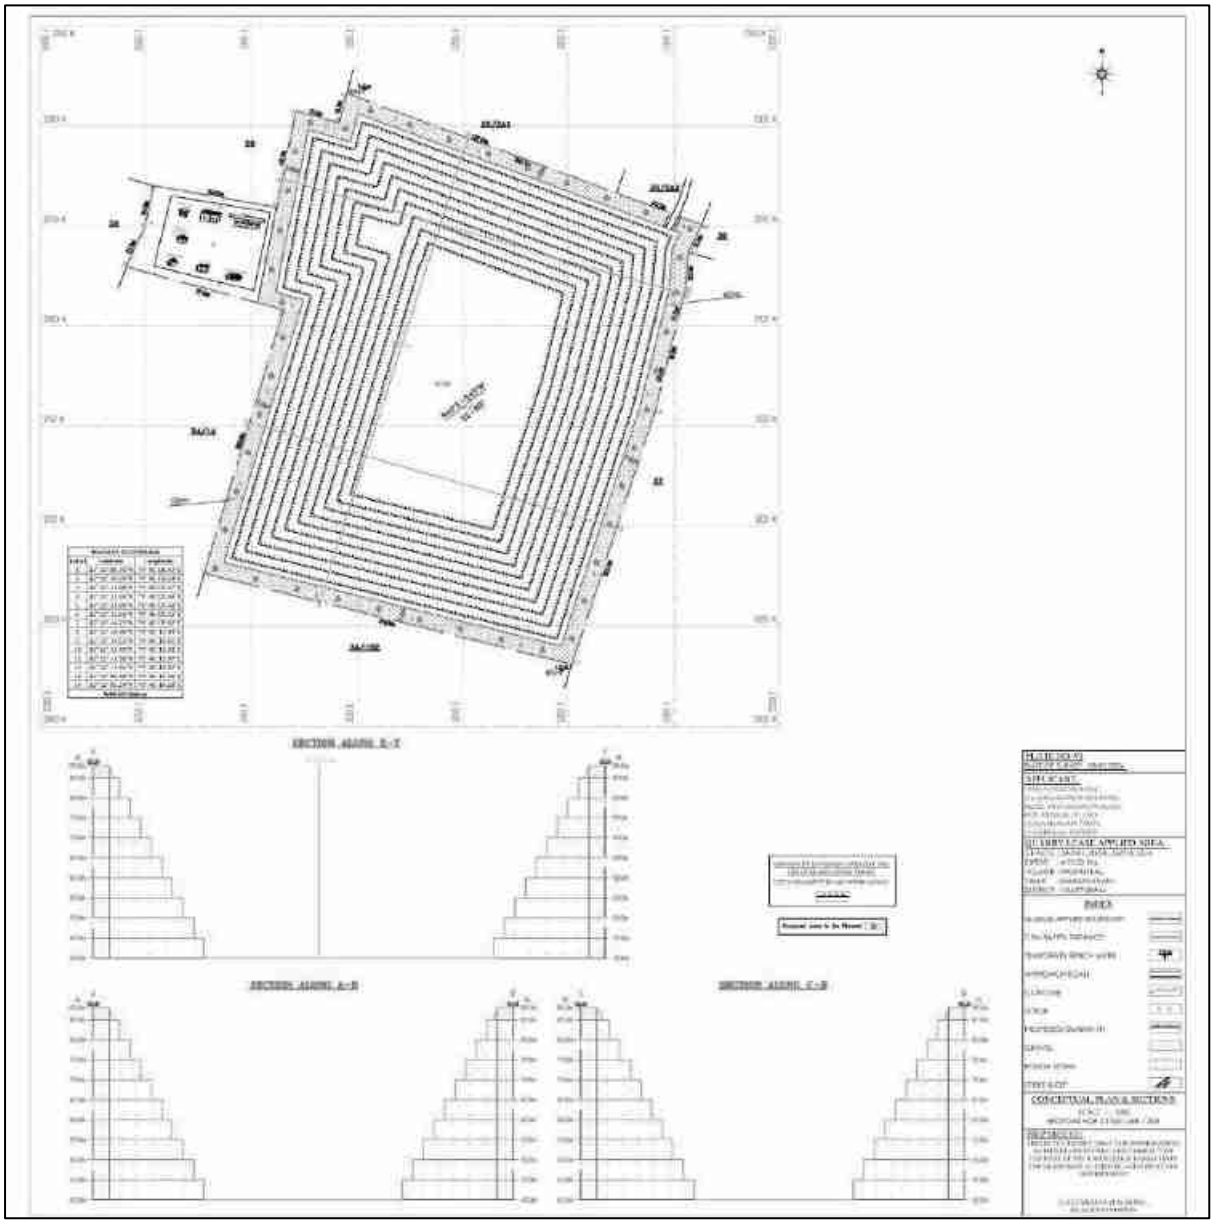

2.8 சுற்றுச்சூழல் தரநிலைகள், சுற்றுச்சூழல் இயக்க நிலைமைகள் அல்லது பிற EIA தேவைகள் (தேவையான தேவைகள்) ஆகியவற்றைப் பூர்த்தி செய்வதற்கான திட்டத்தில் இணைக்கப்பட்ட தணிப்பு நடவடிக்கைகளின் விளக்கம்.

இந்த பிரிவில் கொடுக்கப்பட்டுள்ள தணிப்பு நடவடிக்கைகள் சுற்றுச்சூழல் தரநிலைகள் மற்றும் சுற்றுச்சூழல் இயக்க நிலைமைகளை பூர்த்தி செய்ய சுரங்க நடவடிக்கைகளில் இருந்து உருவாகும் உமிழ்வுகள் (துகள் அல்லது வாயு), ஒலி மாசுபாடு, கழிவு நீர் மற்றும் மேற்பரப்பு ஓட்டம் ஆகியவற்றை நிர்வகிப்பதற்கானவை:

2.8.1 காற்றின் தர மேலாண்மை

துளையிடுதல்

துளையிடும் இயந்திரங்கள் ஈரமான துளையிடல் ஏற்பாடு மற்றும் சூறாவளி தூசி சேகரிப்பான் ஆகியவற்றைக் கொண்டிருக்கும்.

வெடித்தல்

- கட்டுப்படுத்தப்பட்ட வெடிப்பு மேற்கொள்ளப்படும் மற்றும் வெடிக்கும் ஆற்றலின் உகந்த பயன்பாடு காற்று மாசுபாட்டைக் குறைக்க உதவும்.
- இரண்டாம் நிலை வெடிப்பு தவிர்க்கப்படும்.
- தூசி உற்பத்தியைக் குறைப்பதற்காக பாறை உடைப்பான்கள் அதிக அளவுள்ள பாறைகளை உடைப்பதற்குப் பயன்படுத்த பரிந்துரைக்கப்படுகிறது.
- வழக்கமான கண்காணிப்புடன் சரியான ஆக்ஸிஜன் சமநிலையைக் கொண்ட நல்ல தரமான வெடிபொருட்களைப் பயன்படுத்துதல்.
- வெடிமருந்துகளை சார்ஜ் செய்த பிறகு சரியான தண்டுகளை உறுதி செய்தல். முறையான ஸ்டெம்மிங் மெட்டீரியல் தூசி வீசுவதைக் குறைப்பதன் மூலம் சுற்றுப்புற காற்று மாசுபாட்டில் தூசி துகள்கள் பரவுவதைக் குறைக்கும்.
- தூசி உற்பத்தியைக் கட்டுப்படுத்த டோசிங்/லோட் செய்வதற்கு முன் வெடித்த சகதி குவியலில் தண்ணீர் தெளிக்கவும்.

ஏற்றுதல் & போக்குவரத்து

- அணுகு சாலைகள், பெஞ்சுகள் மற்றும் இழுத்துச் செல்லும் சாலைகளை முறையாகப் பராமரித்தல் மற்றும் தண்ணீர் தெளித்தல்.
- காற்று மாசுபாட்டைக் கட்டுப்படுத்த சுரங்க எல்லை, சாலைகள் மற்றும் பிற இடங்களைச் சுற்றி பசுமைப் வளையம்/தோட்டங்கள் மேம்பாடு மேற்கொள்ளப்படும்.
- ஹெச்எம்எம்கள் மற்றும் போக்குவரத்து வாகனங்களின் முறையான பராமரிப்பு செய்யப்படும்.
- வாகன உமிழ்வு விதிமுறைகளின் கீழ் வைக்கப்படும்.
- அனைத்து ஊழியர்களுக்கும் முகமூடிகள் போன்ற தனிப்பட்ட பாதுகாப்பு உபகரணங்கள் வழங்கப்படும். ➢ வழக்கமான காற்றின் தர கண்காணிப்பு மேற்கொள்ளப்படும்.
- சுற்றுச்சூழல் பாதிப்புகளைக் குறைப்பதற்காக MoEF&CC மற்றும் TNPCB வகுத்துள்ள நிபந்தனைகளுக்கு இணங்குதல்.

2.8.2 இரைச்சல் மேலாண்மை

துளையிடுதல்

- உகந்த துளையிடல் செயல்திறனை அடைவதற்கும், மூலத்தில் சத்தம் உருவாக்கத்தைக் குறைப்பதற்கும் கூர்மையான துரப்பண பிட்களைக் கொண்டு துளையிடுதல் ஏற்றுக்கொள்ளப்படும்.
- தனிப்பட்ட பாதுகாப்பு உபகரணங்கள், அதாவது துளையிடல் மற்றும் அதிக இரைச்சல் உள்ள பகுதியில் காதுகுழாய் பயன்படுத்தப்பட வேண்டும்.

வெடித்தல்

- கட்டுப்படுத்தப்பட்ட வெடிப்புக்கு DGMS பரிந்துரைத்த தரநிலைகளின்படி வெடித்தல் செய்யப்படும்; எனவே, நில அதிர்வுகள் சுரங்கப் பகுதிக்கு அருகில் உள்ள கட்டமைப்புகளை பாதிக்காது.
- DGMS வழிகாட்டுதல்களின்படி ஒரு துளை மற்றும் ஒரு தாமதத்திற்கு வெடிபொருள் கட்டணம் பராமரிக்கப்படும்.
- மின்சாரம் அல்லாத டெட்டனேட்டர்கள் (NONEL) அமைப்பைப் பயன்படுத்தி வெடித்தல் மேற்கொள்ளப்படும் மற்றும் வெடிப்பதால் ஏற்படும் சத்தத்தின் தாக்கங்கள் தற்காலிகமானவை.
- வெடிப்பினால் ஏற்படும் அதிர்வுகள் மற்றும் சத்தம் தொடர்ந்து கண்காணிக்கப்படும்

போக்குவரத்து

- சத்தத்தை உருவாக்குவதைக் குறைக்க ஹெச்எம்எம்களில் போதுமான சைலன்சர்கள் வழங்கப்படும்.
- முறையான மற்றும் முறையான பராமரிப்பு, முறையான இடைவெளியில் இயந்திரங்களுக்கு எண்ணெய் தடவுதல் மற்றும் கிரீஸ் செய்தல் ஆகியவை இரைச்சல் உருவாக்கத்தைக் குறைக்கும்.
- அனைத்து ஹெச்எம்எம்களிலும் ஆபரேட்டர்களுக்கான ஒலியியல் ஏ/சி மூடிய அறைகள் பொருத்தப்பட்டிருக்கும்.
- ஹெச்இஎம்எம்களில் பணிபுரியும் தொழிலாளர்களுக்கு பாதுகாப்பு உபகரணங்கள், காதுகுழாய்கள் மற்றும் காது பிளக்குகள் ஆகியவை சுரங்க தளத்தில் உருவாகும் அதிக இரைச்சலின் அளவு மற்றும் தேவைப்படும் இடங்களில் இருந்து பாதுகாப்பு நடவடிக்கைகளாக வழங்கப்படும்.
- சுரங்க நடவடிக்கை மற்றும் பிற பகுதிகளைச் சுற்றி பசுமைப் பட்டை மற்றும் தோட்டங்களின் வளர்ச்சி மேற்கொள்ளப்படும்.
- இரைச்சலின் வழக்கமான கண்காணிப்பு மேற்கொள்ளப்படும்.

2.8.3 நீர் மேலாண்மை

மேற்பரப்பு ஓட்டம்

- குப்பைகளில் இருந்து வெளியேறும் நீரை வெளியேற்றுவதற்காக தற்காலிக மேலடுக்கு மண் கிணற்றைச் சுற்றிலும் மற்றும் செயலில் உள்ள குழியைச் சுற்றிலும் மழைநீர் வேலை செய்யும் குழிக்குள் நுழைவதைத் தடுக்கும் வகையில் மாலை வடிகால்கள் அமைக்க உத்தேசிக்கப்பட்டுள்ளது.
- சுரங்கக் குழிகளில் நேரடியாக விழும் மழை நீர் சேமிக்கப்பட்டு, தோட்டம் மற்றும் தூசியை அடக்குவதற்குப் பயன்படுத்தப்படும்.
- நீரின் தரம் குறித்து வழக்கமான கண்காணிப்பு மேற்கொள்ளப்படும்.

கிரீன் வளையம் / தோட்டம்

சுரங்க குத்தகை பகுதி தோட்டங்கள் இல்லாமல் உள்ளது. குத்தகை பகுதிக்குள் புதர்கள் முக்கியமாக காணப்படுகின்றன. 0.86.0 ஹெக்டேர் பரப்பளவில் பசுமை மண்டலத்தை உருவாக்க முன்மொழிந்தார். சுரங்க குத்தகை பகுதியைச் சுற்றி புங்கை, வாகை, வேம்பு, மஞ்சள் கொன்றை, நாவல், பூவரசு போன்ற மரங்கள் நடப்படும். மொத்தம் 2400மரங்கள் நட திட்டமிடப்பட்டுள்ளது. இடைவெளி 3 மீ x 3 மீ இருக்கும்.

2.9 தொழில்நுட்பத் தோல்வியின் அபாயத்திற்கான புதிய & சோதிக்கப்பட்ட தொழில்நுட்பத்தின் மதிப்பீடு:

தன்மை மற்றும் அளவு ஆகியவற்றிலிருந்து, இருப்புக்கள் மற்றும் தரம் ஆகியவை போதுமான அளவு நம்பகத்தன்மையுடன் நிரூபிக்கப்பட்டுள்ளன. கனிமமயமாக்கலின் வகையைக் கருத்தில் கொண்டு, முன்மொழியப்பட்ட சுரங்க குத்தகையில் சுரங்கத்திற்கு திறந்தவெளி இயந்திரமயமாக்கப்பட்ட முறை மிகவும் சாத்தியமான முறையாகும். சுரங்க இயந்திரங்கள் காலப்போக்கில் மேம்படுத்தப்பட்டு வருகின்றன, எனவே திட்ட முன்மொழிபவர் வரும் ஆண்டுகளில் பாதுகாப்பான மற்றும் சுற்றுச்சூழலுக்கு உகந்த சுரங்க தொழில்நுட்பத்திற்காக மிகவும் மேம்பட்ட உபகரணங்கள் மற்றும் ஆட்டோமேஷனைப் பின்பற்ற விரைவாக செயல்படுவார்.

*****

அத்தியாயம் - 3
சுற்றுச்சூழலின் விளக்கம்

3.1 திட்ட பகுதியின், காலக் கூறுகள் மற்றும் முறை:

திட்டப் பகுதி தமிழ்நாடு, விழுப்புரம் மாவட்டம், மரக்காணம் மாவட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் 4.75.0 ஹெக்டேர் பரப்பளவில் அமைந்துள்ளது. திட்டப் பகுதி மைய மண்டலமாகவும், சுற்றியுள்ள 10 கிமீ சுற்றளவில் உள்ள பகுதி இடையக மண்டலமாகவும் கருதப்படுகிறது. அடிப்படை சுற்றுச்சூழல் கண்காணிப்பை, தி/ள்.ஷ்ரியண்ட் அனலிட்டிகல் & ரிசர்ச் லேப்ஸ் பிரைவேட் லிமிடெட், சென்னை நடத்தியது, இது ஒரு NABL மற்றும் MOEF அங்கீகாரம் பெற்ற சுற்றுச்சூழலின் பல்வேறு கூறுகளுக்கான ஆய்வகமாகும், அதாவது. காற்று, சத்தம், நீர், நிலம் ஆகியவை குளிர்காலத்தில் (மார்ச் முதல் மே 2024 வரை) சாதாரண கல் சுரங்கத்திலிருந்து 10 கிமீ சுற்றளவில் தூரத்தை உள்ளடக்கிய ஆய்வுப் பகுதியில் மேற்கொள்ளப்பட்டன. தாவரங்கள் மற்றும் விலங்கினங்கள், நில பயன்பாட்டு முறை, காடு போன்றவற்றின் பிற சுற்றுச்சூழல் தரவுகளும் கள ஆய்வுகள் மற்றும் பல்வேறு மாநில அரசிடமிருந்து சேகரிக்கப்பட்ட இரண்டாம் நிலை தகவல்கள் மூலம் உருவாக்கப்பட்டன. துறைகள். மாதிரி முறைகள் மற்றும் பகுப்பாய்வு. சமூக-பொருளாதார கணக்கெடுப்பு நடத்தப்பட்டது, மக்கள், சர்பஞ்ச் மற்றும் மருத்துவ அதிகாரிகளுடன் உரையாடல் மூலம் கேள்வித்தாள்கள் மற்றும் தகவல் சேகரிப்பு ஆகியவை ஆய்வுப் பகுதிக்குள் மக்கள்தொகை கட்டமைப்புகள், வசதிகள் மற்றும் உள்கட்டமைப்பு கிடைக்கும் தன்மைக்கான மக்கள்தொகைக் கணக்கெடுப்பின் தரவுகளால் ஆதரிக்கப்படுகின்றன. பல்வேறு சுற்றுச்சூழல் கூறுகளுக்கான அடிப்படை மதிப்புகள் இந்த அத்தியாயத்தில் விவாதிக்கப்படுகின்றன.

ஆய்வுப் பகுதியில் சுற்றுச்சூழலின் விளக்கம்

அட்டவணை 3.1 குத்தகை பகுதியின் விளக்கம்		
வ. எண்	பகுதிகள்	திட்ட தளத்திலிருந்து பகுதிகள் தூரம்
1	சர்வதேச மரபுகளின் கீழ் பாதுகாக்கப்பட்ட பகுதிகள், அவற்றின் சுற்றுச்சூழல், நிலப்பரப்பு, கலாச்சார அல்லது பிற தொடர்புடைய மதிப்புக்கான தேசிய அல்லது உள்ளூர் சட்டங்கள்	15 கிமீ சுற்றளவில் இல்லை

<table>
<tr><td>2</td><td colspan="2">சுற்றுச்சூழல் காரணங்களுக்காக முக்கியமான அல்லது உணர்திறன் கொண்ட பகுதிகள்</td></tr>
<tr><td>A</td><td>சதுப்பு நிலங்கள், நீர்நிலைகள் அல்லது பிற நீர்நிலைகள்,</td><td>
<table>
<tr><th>நீர்நிலை</th><th>தூரம் (கிலோ மீட்டர்</th><th>திசை</th></tr>
<tr><td>ஓடை</td><td>230 மீட்டர்</td><td>வடகிழக்கு</td></tr>
<tr><td>ஓடை</td><td>300 மீட்டர்</td><td>வடக்கு</td></tr>
<tr><td>குளம்</td><td>230 மீட்டர்</td><td>தென்மேற்கு</td></tr>
<tr><td>பிரம்மதேசம் ஏரி</td><td>2.2 கி.மீ</td><td>தெற்கு</td></tr>
<tr><td>ஏந்தூர் ஏரி</td><td>2.53 கி.மீ</td><td>தென்கிழக்கு</td></tr>
<tr><td>கீழ்சேவூர் ஏரி</td><td>3.40 கி.மீ</td><td>வடமேற்கு</td></tr>
<tr><td>புதுப்பாக்கம் ஏரி</td><td>3.59 கி.மீ</td><td>தென்கிழக்கு</td></tr>
<tr><td>அலங்ககுப்பம் ஏரி</td><td>5.03 கி.மீ</td><td>கிழக்கு</td></tr>
<tr><td>நொளம்பூர் ஏரி</td><td>5.42 கி.மீ</td><td>வடமேற்கு</td></tr>
<tr><td>புதுநகர் ஏரி</td><td>8.24 கி.மீ</td><td>தெற்கு</td></tr>
<tr><td>நல்லாவூர் ஏரி</td><td>8.32 கி.மீ</td><td>தெற்கு</td></tr>
</table>
</td></tr>
<tr><td>B</td><td>கடலோர மண்டலம், உயிர்க்கோளங்கள்,</td><td>10கிமீ சுற்றளவில் இல்லை</td></tr>
<tr><td>C</td><td>மலைகள், காடுகள்</td><td>கீழ்சேவூர் ஆர்.எஃப் 4.04 - கி.மீ) வடமேற்கு) தொலைவில் உள்ளது, குமலம்பட்டு ஆர்.எஃப் 7.17கி.மீ) தெற்கு) தொலைவில் அமைந்துள்ளது.</td></tr>
<tr><td>3</td><td>பாதுகாக்கப்பட்ட, முக்கியமான அல்லது உணர்திறன் வாய்ந்த தாவரங்கள் அல்லது விலங்கினங்களால் இனப்பெருக்கம், கூடு கட்டுதல், உணவு தேடுதல், ஓய்வு, குளிர்காலம், இடம்பெயர்வு ஆகியவற்றிற்கு பயன்படுத்தப்படும் பகுதிகள்</td><td>15 கிமீ சுற்றளவில் இல்லை</td></tr>
<tr><td>4</td><td>உள்நாட்டு, கடலோர, கடல் அல்லது நிலத்தடி நீர்</td><td>15 கிமீ சுற்றளவில் இல்லை</td></tr>
</table>

5	மாநில, தேசிய எல்லைகள்	15 கிமீ சுற்றளவில் இல்லை
6	சுற்றுலா, யாத்திரைப் பகுதிகளுக்கு பொதுமக்கள் பயன்படுத்தும் வழிகள் அல்லது வசதிகள்	15 கிமீ சுற்றளவில் இல்லை
7	பதுக்கபட்ட படை நிறுவல்கல்	15 கிமீ சுற்றளவில் இல்லை
8	அடர்த்தியான மக்கள்தொகை அல்லது கட்டப்பட்ட பகுதி	திண்டிவனம் – 13.09 கிமீ (மேற்கு).
9	மனிதனால் உருவாக்கப்பட்ட நிலப் பயன்பாடுகளால் ஆக்கிரமிக்கப்பட்ட பகுதிகள் (மருத்துவமனைகள், பள்ளிகள், வழிபாட்டுத் தலங்கள், சமூக வசதிகள்)	திண்டிவனம் – 13.09 கிமீ (மேற்கு).
10	முக்கியமான, உயர்தர அல்லது பற்றாக்குறை வளங்களைக் கொண்ட பகுதிகள் (நிலத்தடி நீர் ஆதாரங்கள், மேற்பரப்பு வளங்கள், வனவியல், விவசாயம், மீன்வளம், சுற்றுலா, கனிமங்கள்)	இல்லை
11	ஏற்கனவே மாசு அல்லது சுற்றுச்சூழல் பாதிப்புக்குள்ளான பகுதிகள். (தற்போதுள்ள சட்ட சுற்றுச்சூழல் தரநிலைகள் மீறப்பட்டவை)	இல்லை
12	சுற்றுச்சூழல் பிரச்சனைகளை (பூகம்பங்கள், சரிவு, நிலச்சரிவு, அரிப்பு, வெள்ளம் அல்லது தீவிர அல்லது பாதகமான காலநிலை நிலைமைகள்) முன்வைக்க திட்டம் ஏற்படுத்தக்கூடிய இயற்கை ஆபத்துக்கு ஆளாகக்கூடிய பகுதிகள்	நிலநடுக்கம், வெள்ளம் போன்றவை ஏற்படாத பகுதி

படம் 3.1 ஆய்வுப் பகுதியின் சுற்றுச்சூழல் அமைப்பு

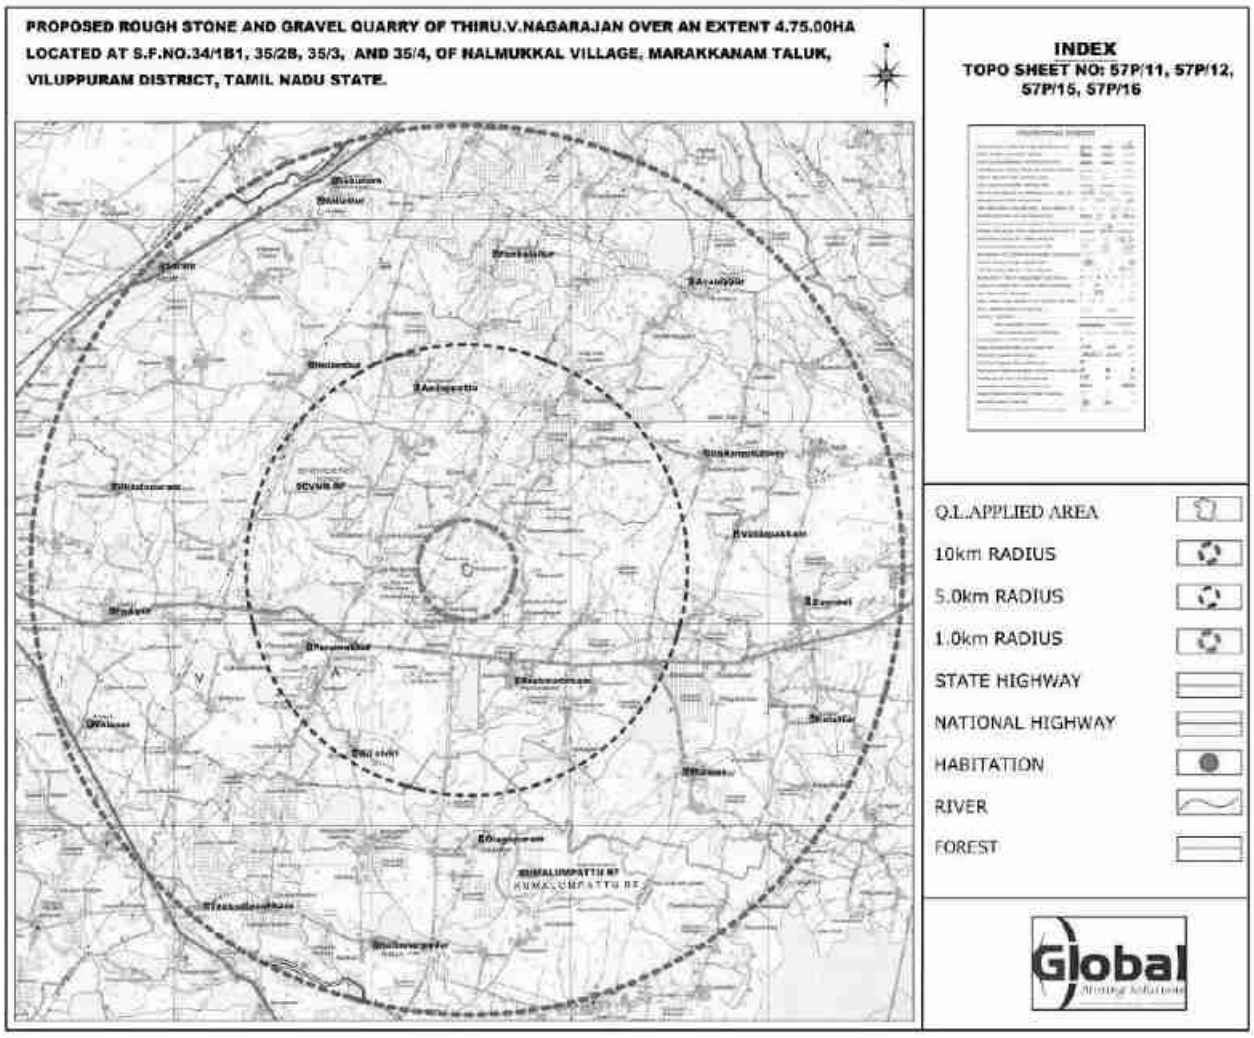

ஆய்வு காலம்

தொடர்புடைய தகவல் மற்றும் தரவுகள் (முதன்மை மற்றும் இரண்டாம் நிலை இரண்டும்) கோடைக் காலத்தில் (மார்ச் முதல் மே. 2024 வரை) தயாரிப்புக்கான வழிகாட்டுதல்களின்படி, மைய மற்றும் இடையக மண்டலத்தில் (சுரங்க எல்லையிலிருந்து 10 கிமீ தூரம்) சேகரிக்கப்பட்டன. தற்போதுள்ள உயிரியல் மற்றும் சமூக சூழலில் 10 கிமீ ஆய்வு பகுதிக்குள் சுரங்க தளத்தின் தாக்கத்தை மதிப்பிடுவதற்காக EIA ஆய்வுகள்.

3.2 சுற்றுச்சூழல் கூறுகளுக்கான அடித்தளத்தை நிறுவுதல்:

மைய மற்றும் இடையகப் பகுதியின் தற்போதைய சூழ்நிலையைப் புரிந்துகொள்ள பின்வரும் கூறுகள்/அளவுருக்கள் பற்றிய தகவல்கள் சேகரிக்கப்பட்டன:

இதில் உள்ள கூறுகள்:

- வானிலை சூழல்
- காற்று சூழல்
- நீர் சூழல்
- இரைச்சல் சூழல்
- மண் சூழல்
- உயிரியல் சூழல்
- நில பயன்பாடு
- சமூக பொருளாதார சூழல்
- நீர்வளவியல்

அடிப்படை தரவு சேகரிப்பு

ஆய்வுப் பகுதியில் சுற்றுச்சூழலின் பல்வேறு கூறுகள் குறித்த அடிப்படை சுற்றுச்சூழல் தரவுகள் கோடைக் காலத்தில் (மார்ச் முதல் மே 2024) பகுதியின் தற்போதைய சூழ்நிலையை மதிப்பிடுவதற்காக சேகரிக்கப்பட்டன. கீழே கொடுக்கப்பட்டுள்ள அட்டவணையில் விவரங்கள் கொடுக்கப்பட்டுள்ளன.

பருவமழைக்குப் பிந்தைய காலத்தில் (மார்ச் முதல் மே 2024 வரை) அடிப்படை தரவு சேகரிப்பு

வ. எண்	சுற்றுச்சூழல் கூறு	முதன்மை தரவு		
		அளவுருக்கள்	அதிர்வெண்	கண்காணிப்பு /மாதிரி இடங்கள்
1	நிலம்	விவசாயம், வாழ்விடம், தொழிற்சாலைகள், பாறைக் கழிவுகள் /குவாரிகள், வனப் பகுதி, தோட்டம் / தாவரங்கள், திறந்தவெளி புதர், நீர்நிலைகள் போன்றவை.	பருவத்திற்கு ஒரு முறை	10 கிலோமீட்டர் சுற்றளவில்
2	வானிலை	வெப்பநிலை, ஈரப்பதம், காற்றின் வேகம், காற்றின் திசை.	ஒரு மணி நேரத்திற்கு	1
3	காற்று	PM10, PM2.5, SO2, NO2, CO & PAH	வாரத்திற்கு இரண்டு முறை (24 மணிநேரத்திற்கு)	6
4	இரைச்சல்	இரைச்சல் அளவுகள் Leq in dB (A)	பருவத்திற்கு ஒரு முறை (பகல் & இரவு நேரம்)	6
5	நீர்	IS 10500 – 2012 படி அளவுருக்கள்	பருவத்திற்கு ஒரு முறை	

A	மேற்பரப்பு நீர்	IS 10500 – 2012 படி அளவுருக்கள்	பருவத்திற்கு ஒரு முறை	2
B	நிலத்தடி நீர்	IS 2720/USDA படி அளவுருக்கள்	பருவத்திற்கு ஒரு முறை	6
6	மண் சூழல்	IS 2720/USDA படி அளவுருக்கள்	பருவத்திற்கு ஒரு முறை	6
7	உயிரியல்	தாவரங்கள் மற்றும் விலங்கினங்கள்	பருவத்திற்கு ஒரு முறை	திட்ட பகுதி
8	சமூக பொருளாதார	சமூக-பொருளாதார சூழல்	பருவத்திற்கு ஒரு முறை	திட்ட பகுதி

சுற்றுச்சூழல் அடிப்படை தரவு சேகரிப்புக்கு பயன்படுத்தப்படும் கருவிகள்

சுற்றுச்சூழல் அடிப்படை தரவு சேகரிப்பு பணிக்காக தளத்தில் பின்வரும் கருவிகள் பயன்படுத்தப்பட்டன.

- வாயு மாசுபாட்டிற்கான இணைப்புடன் தூசி மாதிரி, என்விரோடெக் ஏபிஎம்.460
- ஃபைன் பார்ட்டிகுலேட் மேட்டர் (FPS) மாதிரி APM 550.
- ஒலி நிலை மீட்டர் மாதிரி என்விரோடெக் SLM – 100.
- டிஜிட்டல் டி.ஓ. மீட்டர் மாடல் - 831 E (CPCB கிட்).
- வானிலை கண்காணிப்பு நிலைய மாதிரி என்விரோ WM 271.
- நீர் நிலை காட்டி மற்றும்
- குளோபல் பொசிஷனிங் சிஸ்டம் (GPS) தொடரும் பிரிவுகளில் கொடுக்கப்பட்டுள்ள பிரதிநிதி மாதிரி புள்ளிகளிலிருந்து காற்று, நீர், சத்தம் மற்றும் மண்ணின் மாதிரிகளை சேகரிப்பது தவிர, நில பயன்பாடு, தாவரங்கள் மற்றும் விவசாய பயிர்கள் பற்றிய தரவுகளும் களக் குழுவால் தொடர்பு கொண்டு சேகரிக்கப்பட்டது. ஆய்வுப் பகுதி மற்றும் பல்வேறு அரசுத் துறைகள் / ஏஜென்சிகளின் உள்ளூர்வாசிகளின் எண்ணிக்கை. ஆய்வுப் பகுதியின் தற்போதைய சூழலின் தெளிவான காட்சியைப் பெறுவதற்கு இது களக் குழுவின் உறுப்பினர்களுக்கு ஒரு சிறந்த வாய்ப்பை வழங்கியது.

3.3 அனைத்து சுற்றுச்சூழல் கூறுகளின் அடிப்படை வரைபடம்

(முன்மொழியப்பட்ட குவாரி தளத்தில் இருந்து 1 கிமீ சுற்றளவில் அமைந்துள்ள கட்டமைப்புகளின் கணக்கீடு);

முன்மொழியப்பட்ட குவாரியிலிருந்து 1 கிமீ சுற்றளவில் அமைந்துள்ள கட்டமைப்புகளைக் கண்டறிந்து பட்டியலிட ஒரு தள ஆய்வு நடத்தப்பட்டது, மேலும் அவை கீழே விவரிக்கப்பட்டுள்ளன. நல்முக்கல் கிராம நிர்வாக அலுவலகம் (VAO) மூலம் 300 மீட்டர் சுற்றளவில் எந்த கட்டமைப்புகளும் இல்லை என்று PP கடிதம் பெற்றுள்ளார்.

படம் 3.2 குத்தகைப் பகுதியிலிருந்து 1 கிமீ சுற்றளவுக்கு 50 மீட்டர் இடை வெளியைக் காட்டும் அடிப்படை வரைபடம்

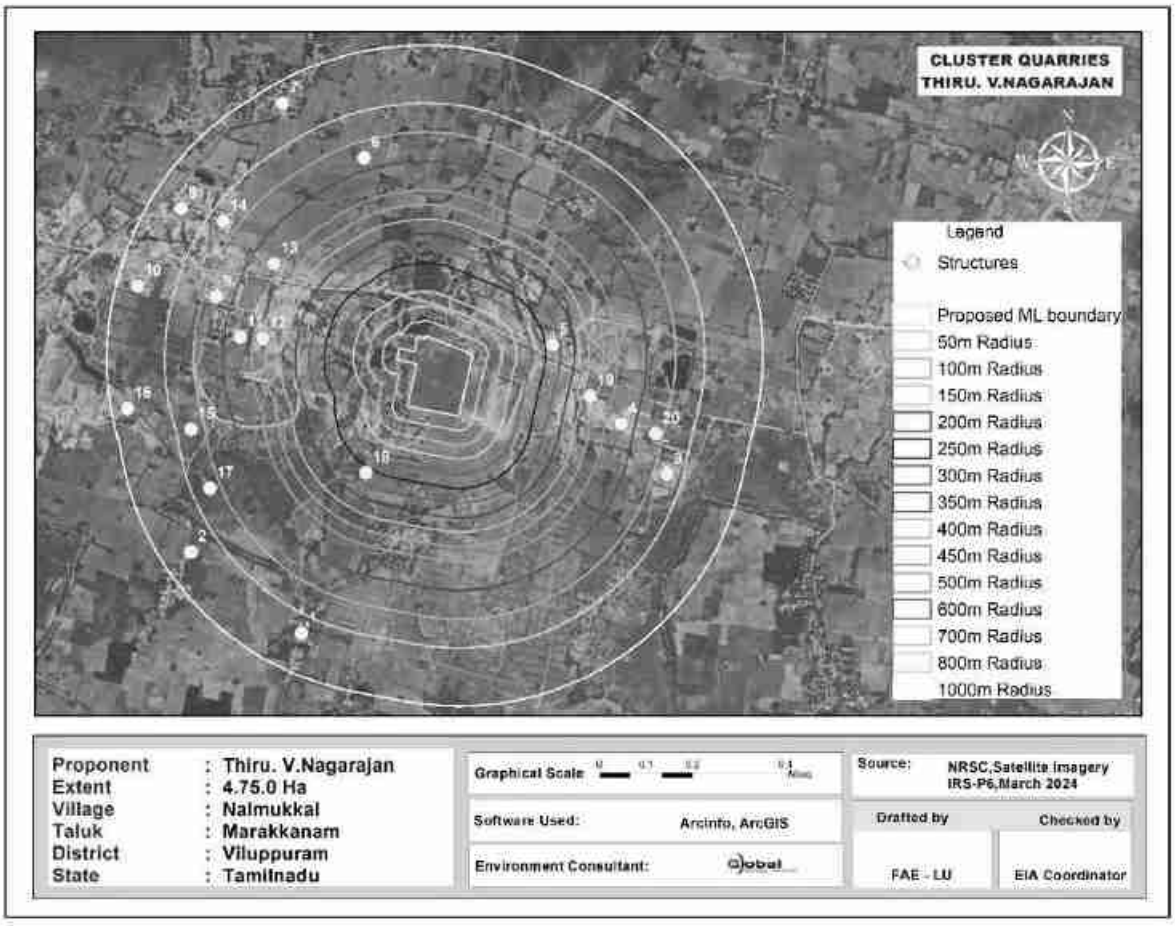

படம் - 3.2.a திட்டப்பகுதியின் செயற்கைக் கோள்வரை படம் (10 கிமீசுற்றளவு)

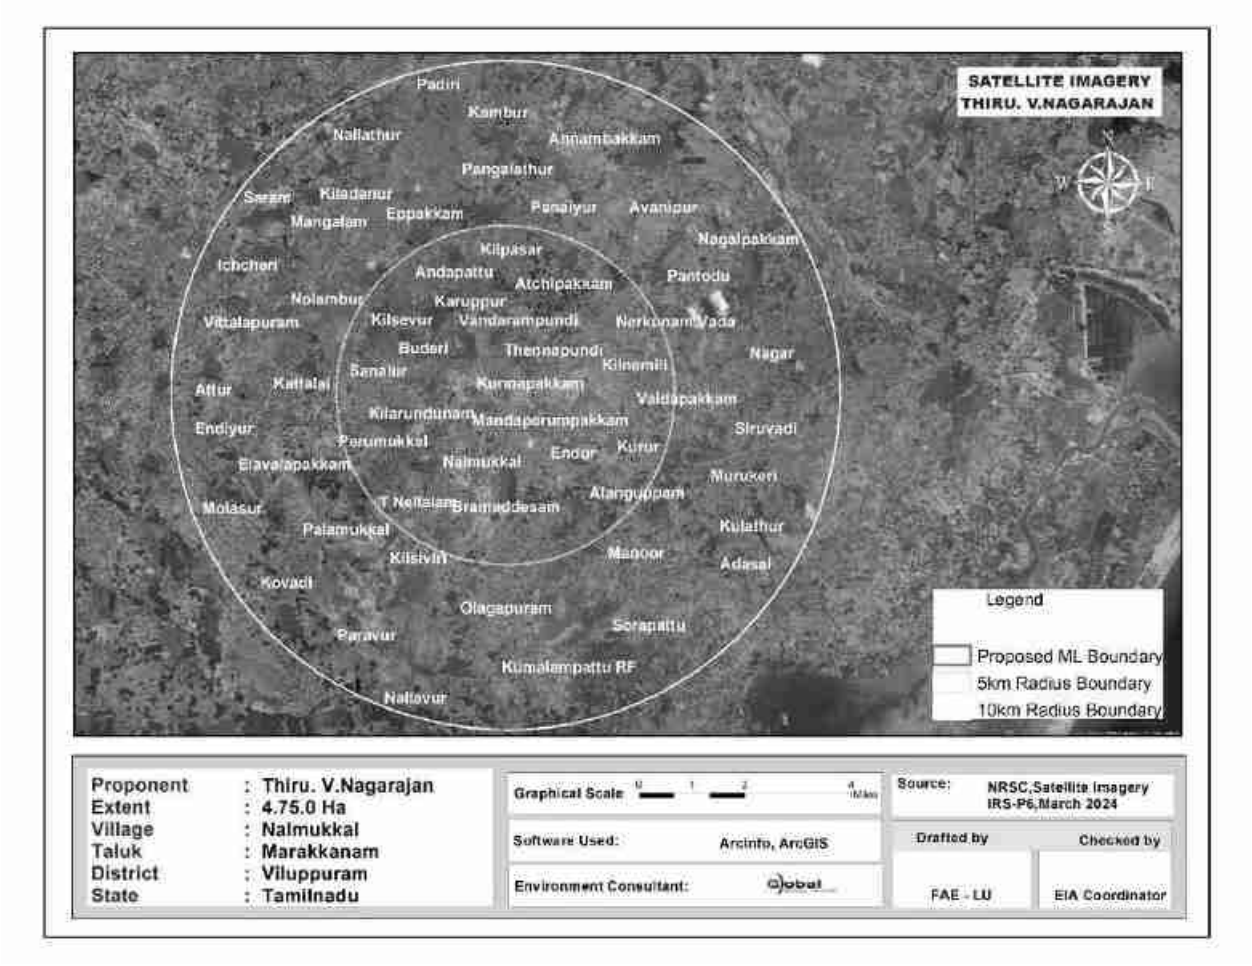

3.3.1 வானிலை சுற்றுச் சூழல்:

தாங்கல் மண்டலத்தில் நிலவும் வானிலை நிலைகள் கீழே கொடுக்கப்பட்டுள்ளன.

காலநிலை

விழுப்புரம் மாவட்டத்தின் காலநிலை வெப்பமண்டலமானது. நவம்பர் முதல் ஜனவரி வரையிலான காலகட்டத்தில் வானிலை இருந்து இதமான காலம். கோடைகாலத்தில் இப்பகுதியின் வெப்பநிலை18^{0}C முதல் அதிகபட்சமாக 42^{0}C வரை இருக்கும்.

மழைப்பொழிவு

விழுப்புரம் மாவட்டம் பொதுவாக வெப்பம் மற்றும் ஈரப்பதமான காலநிலையை கொண்டது. தென்மேற்கு மற்றும் வடகிழக்கு பருவமழைகளின் மூலம்மாவட்டம் மழையைப் பெறுகிறது. பெரும்பாலான மழைப்பொழிவு வங்காள விரிகுடாவில் முக்கியமாக NE பரு மழைகாலத்தில் ஏற்படும் காற்றழுத்த தாழ்வுநிலைகளால் ஏற்படும் சூறாவளி புயல் வடிவில் ஏற்படுகிறது. SW பருவமழை மிகவும் ஒழுங்கற்றது மற்றும் கோடை மழைமிகக்குறைவு. NE & SW பருவமழைகள் இரண்டிலும் இந்தப் பகுதியில் மழைப்பொழிவு சுமார் 800மிமீ முதல் 900 மிமீ வரை இருக்கும். அதிகப்படியான மழைப் பொழிவு 192% (ஆதாரம்: Mausam.imd.gov.in).

2017 முதல் 2021 வரையிலானமழைப்பொழிவுகீழேகொடுக்கப்பட்டுள்ளது.

அட்டவணை 3.2 மலை பொழிவின் தரவு					
மலைபொழிவின் அளவு மில்லிமீட்டர்					சராசரி மலைபொழிவு மில்லிமீட்டர்
2017	2018	2019	2020	2021	
1231.8	750.3	1022.6	1077	1521.2	980

ஒப்புஈரப்பதம்

அதிக ஈரப்பதம் 55% முதல் 65% வரை ஈரப்பதம் ஆண்டு முழுவதும் நிலவும். ஈரப்பதம் காலையில் அதிகபட்சமாகவும் மாலையில் குறைந்தபட்சமாகவும் இருக்கும். வடகிழக்கு பருவமழை 65%க்கு மேல் இருக்கும் போது தவிர. இருப்பினும், கடலோரப் பகுதிகள் ஒப்பீட்டளவில் அதிக ஈரப்பதத்துடன் இருக்கும்

நிலஅதிர்வுதகவல்

ஆய்வுப்பகுதி மண்டலம் II இல் வருகிறது, இது குறைவான செயலில் உள்ள மண்டலத்தின் கீழ்வருகிறது. இந்தியாவின் நிலஅதிர்வு வரைபடம் படம் 3.3 என கொடுக்கப்பட்டுள்ளது.

படம் 3.3 இந்தியாவின் நில அதிர்வு வரைபடம்

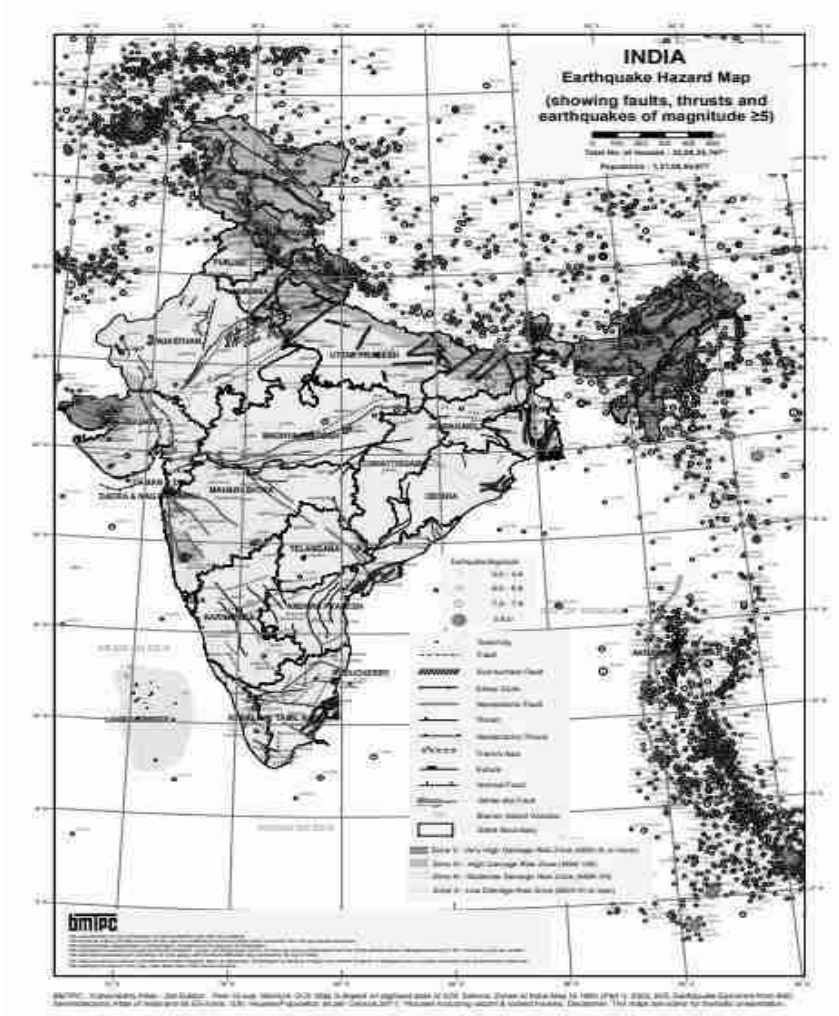

படம் 3.4 விண்ட்ரோஸ்ப்ளாட் மார்ச் 2024 இல்

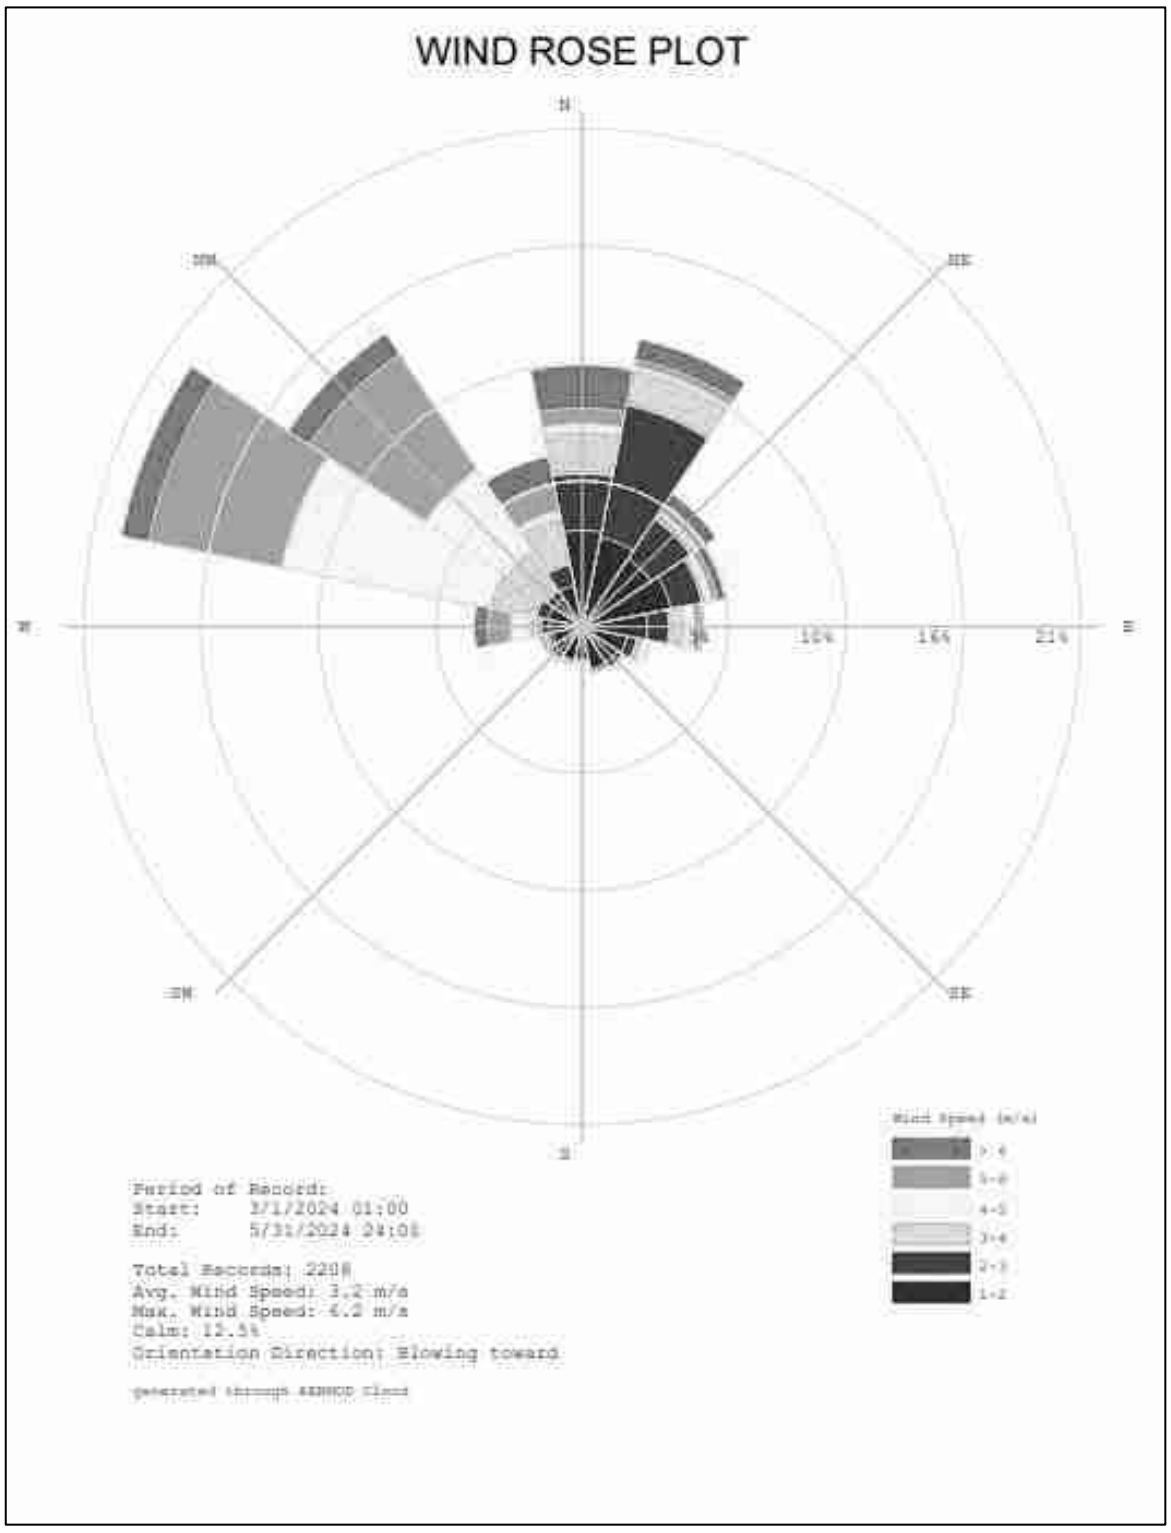

திட்டப் பகுதியின் வானிலை தரவு

மார்ச் 2024 முதல் மே 2024 வரை ஆய்வுப் பகுதியில் சேகரிக்கப்பட்ட வானிலைத்தரவு, வெப்பநிலை, காற்றின்வேகம், காற்றின்திசை மற்றும் ஈரப்பதம் ஆகியவை அடங்கும். மேற்கு திசையில் இருந்து பிரதான காற்று வீசுகிறது. கோடையில் வெப்பநிலை வரம்பு 24.4^{0}C முதல் அதிகபட்சமாக 27.1^{0}C வரை இருந்தது.

3.3.2 சுற்றுப்புற காற்று கண்காணிப்பு தரவு

6 இடங்களில் சுற்றுப்புற காற்றின் தர கண்காணிப்பு மேற்கொள்ளப்பட்டுள்ளது. ஒன்று மைய மண்டலத்திலும் மீதமுள்ள ஐந்து இடங்கள் இடையகப் பகுதிகளிலும். கண்காணிப்பு இடங்கள் தேர்வு செய்யப்பட்டுள்ளன, அந்த அளவீடு அப்பகுதியில் நிலவும் ஒட்டுமொத்த காற்று நிலையை பிரதிபலிக்கிறது. ஆய்வுப் பகுதியானது, கல் சுரங்கங்கள் மற்றும் கிரஷர்களைக் கொண்ட கிராமப்புறச் சூழலைப் பிரதிபலிக்கிறது.
பிராந்திய காலநிலை தரவு, ஆய்வுக் காலத்தில் காற்று வீசும் திசையை அறிய வழிகாட்டியாகப் பயன்படுத்தப்பட்டது. ஆய்வுக் காலத்தில் நிலவும் காற்றின் முக்கிய திசைகள், உணர்திறன் ஏற்பிகள், மனித குடியிருப்புகள் மற்றும் சுற்றியுள்ள சுரங்க நடவடிக்கைகள் ஆகியவற்றைக் கருத்தில் கொண்டு இடங்கள் அடையாளம் காணப்பட்டன.
சுவாச துகள்கள் (PM10), நுண் துகள்கள் (PM2.5), சல்பர் டை ஆக்சைடு (SO2) மற்றும் நைட்ரஜனின் ஆக்சைடுகள் (NOx) ஆகியவற்றின் அளவுகள் அடிப்படை நிலையை நிறுவுவதற்காக கண்காணிக்கப்பட்டன. பிஎம் 10 ஆனது வடிகட்டி காகிதங்களில் சுவாசிக்கக்கூடிய தூசி மாதிரிகளின் உதவியுடன் மாதிரி எடுக்கப்பட்டது மற்றும் SO2 & NOx ஆகியவை RD மாதிரிகளுடன் இணைக்கப்பட்ட இம்பிங்கர்களில் அந்தந்த உறிஞ்சுதல் ஊடகங்களில் உறிஞ்சப்பட்டு ஸ்பெக்ட்ரோ-ஃபோட்டோமெட்ரிக் முறையில் பகுப்பாய்வு செய்யப்பட்டன. PM2.5 நுண்ணிய துகள் மாதிரிகளின் உதவியுடன் கண்காணிக்கப்பட்டது. சுற்றுப்புற காற்று ஆய்வுக்கான கண்காணிப்பு இடங்கள் கீழே உள்ள அட்டவணை - 3.3 மற்றும் படம் 3.5 இல் கொடுக்கப்பட்டுள்ளன.

அட்டவணை 3.3: சுற்றுப்புற காற்றின் தரக்கண்காணிப்பு இடங்களின் விவரங்கள்

வரிசை எண்	இருப்பிடக் குறியீடு	கண்காணிப்பு இடங்கள்	தூரம்	அட்சரேகை மற்றும் தீர்க்கரேகை
1	AAQ1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	மையபகுதி	12°13'10.17"N 79°46'10.51"E
2	AAQ2	நல்முக்கல்	2.13 கிமீ, தென்மேற்கு	12°12'12.58"N 79°45'32.6"E
3	AAQ3	சீனலூர்	2.20 கிமீ, மேற்கு	12°12'34.19"N 79°46'57.62"E
4	AAQ4	குன்னபாக்கம்	1.02 கிமீ, வடமேற்கு	12°13'09.47"N 79°450'0.38"E
5	AAQ5	ஏந்தூர்	1.80 கிமீ, வடமேற்கு	12°13'39.51"N 79°45'58.18"E
6	AAQ6	தென்னம்பூண்டி	1.65 கிமீ, வடகிழக்கு	12°13'44.03"N 79°46'54.41"E

படம் 3.5 சுற்றுப்புறகாற்று கண்காணிப்பு இடங்கள்

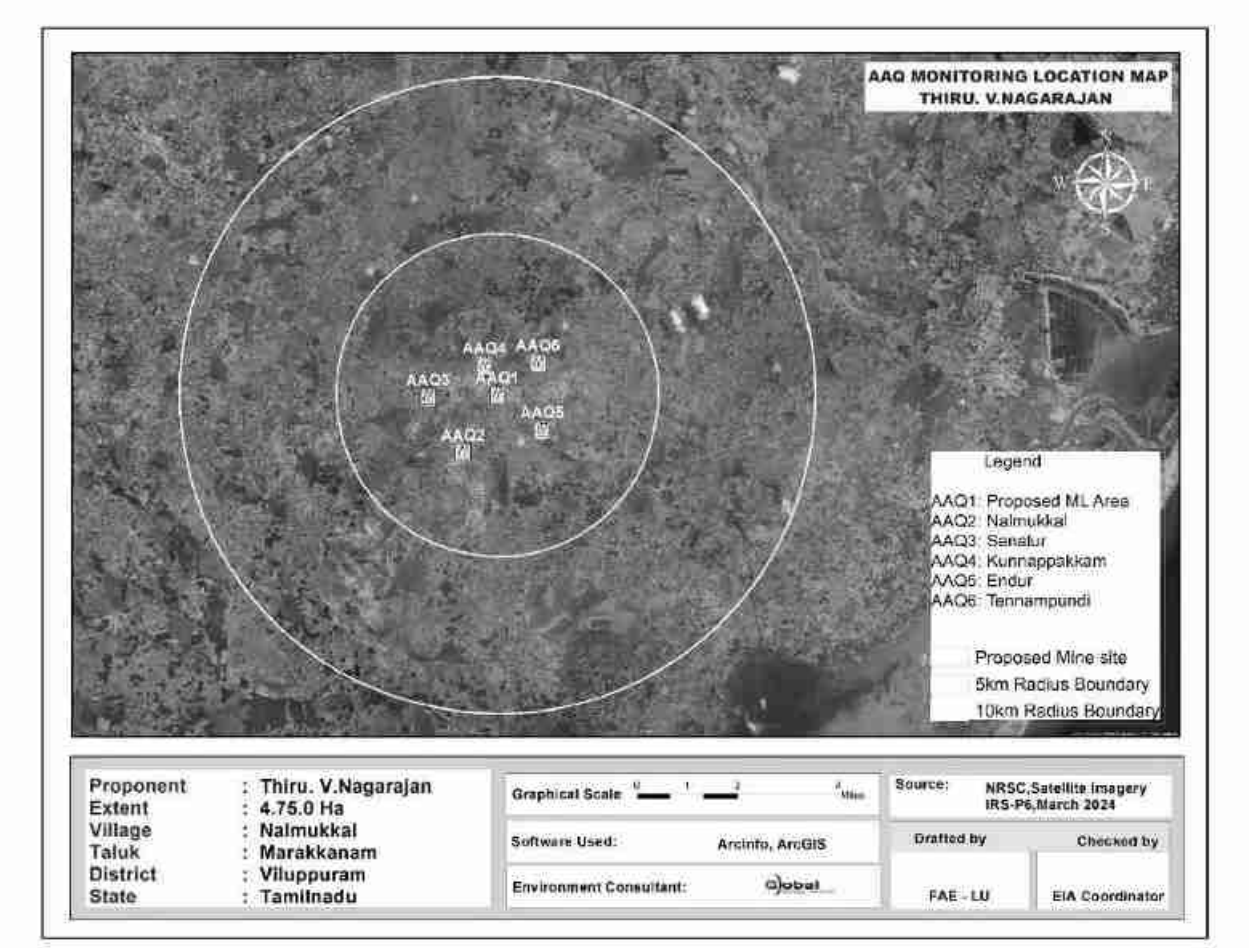

6 இடங்களில் உள்ள பல்வேறு காற்று மாசுபடுத்திகளின் செறிவுகள் கீழே கொடுக்கப்பட்டுள்ளன. அட்டவணையில் உள்ள அனைத்து கூறுகளுக்கும், அலகுμg/m3 இல்உள்ளது.

அட்டவணை.3.4, 6 இடங்களில் காற்று மாதிரி பகுப்பாய்வின் முடிவுகள்

நிலைய குறீடு	குறைவான	அதிகமான	சராசரி
Particulate matter PM-$_{2.5}$ (µg/m^3)			
AAQ-1	41.2	67.3	54.25
AAQ-2	38.1	59.2	48.65
AAQ-3	36.2	51.2	43.70
AAQ-4	36.1	56.7	46.40
AAQ-5	36.3	53.2	44.75
AAQ-6	42.2	53.5	47.85
CPCB NAAQS 2009 for PM $_{2.5}$ - 60 µg/m^3			
Particulate matter PM-$_{10}$ (µg/m^3)			
AAQ-1	19.20	32.3	25.75
AAQ-2	18.2	30.4	24.30
AAQ-3	17.38	25.3	21.34
AAQ-4	16.64	25.1	20.87
AAQ-5	18.10	26.2	22.15
AAQ-6	19.70	25.1	22.40
CPCB NAAQS 2009 for PM $_{10}$ - 100 µg/m^3			
Sulphur Di-oxide as SO_2 (µg/m^3)			
AAQ-1	4.4	7.5	5.95
AAQ-2	3.7	7.2	5.45
AAQ-3	4.1	5.8	4.95
AAQ-4	3.2	5.4	4.30
AAQ-5	3.7	6.8	5.25
AAQ-6	3.2	5.8	4.50
CPCB NAAQS 2009 for SO_2 – 80 µg/m^3			
Oxide of Nitrogen as NO_2 (µg/m^3)			
AAQ-1	6.5	9.9	8.20
AAQ-2	6.1	9.1	7.60
AAQ-3	5.5	8.2	6.85
AAQ-4	5.7	7.9	6.80
AAQ-5	5.8	8.9	7.35
AAQ-6	6.2	9.5	7.85
CPCB NAAQS 2009 for NO_2 – 80 µg/m^3			

முடிவுகள் சுருக்கப்பட்டு வரைபடத்தில் படம் 3.6 – 3.10.a கீழே கொடுக்கப்பட்டுள்ளது.

படம் 3.6 சுற்றுப்புற காற்றின் தர தரவு A1 – சுரங்க குத்தகை பகுதி

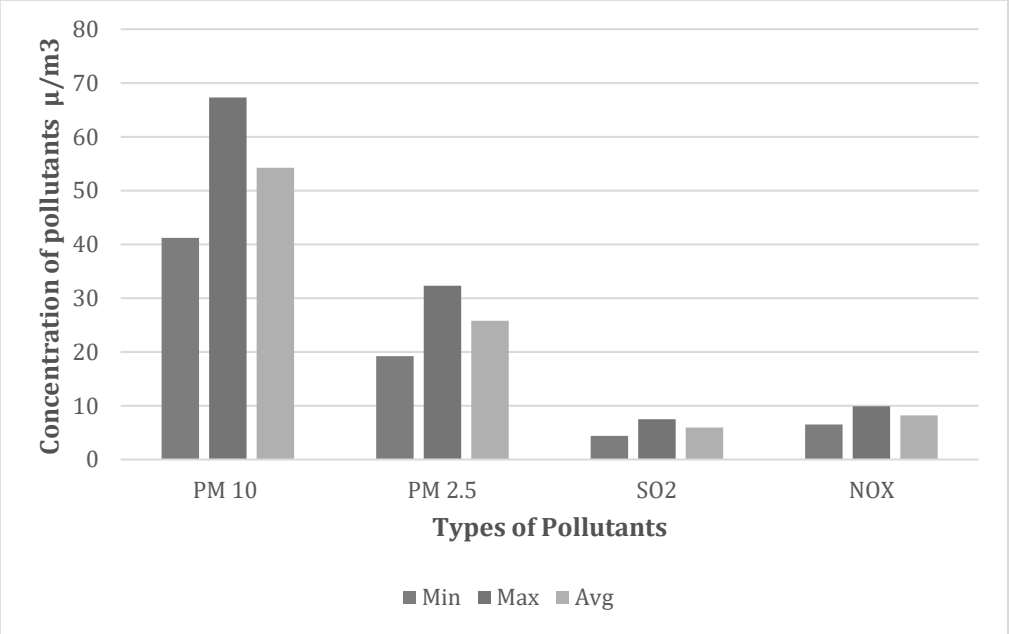

படம் 3.7 சுற்றுப்புற காற்றின் தர தரவு A2 –நல்முக்கல் கிராமம்

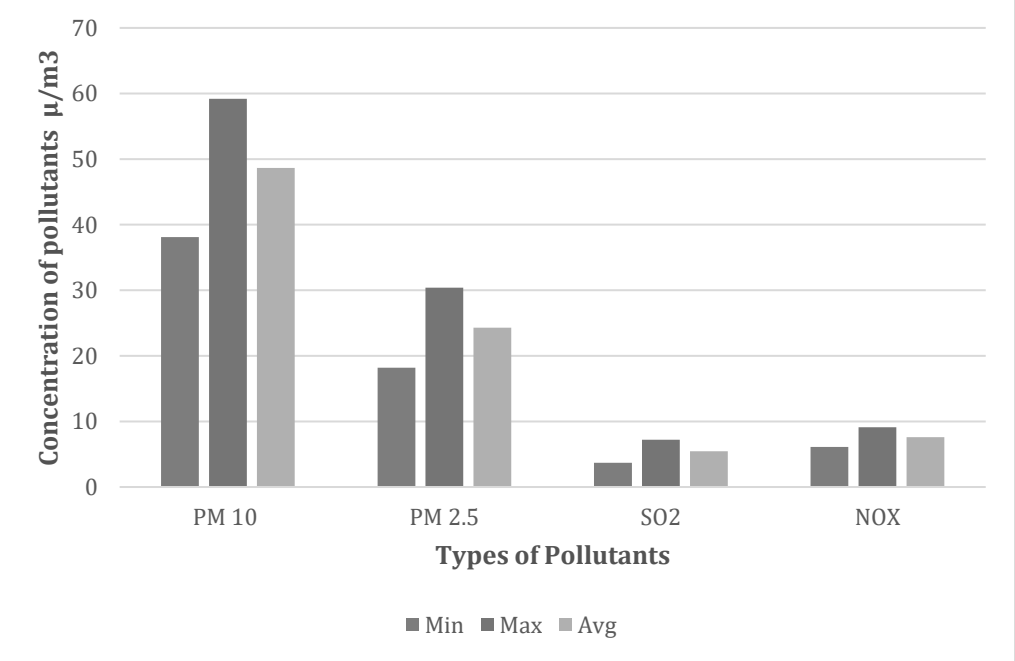

படம் 3.8 சுற்றுப்புற காற்றின் தர தரவு A3 – சீனலூர் கிராமம்

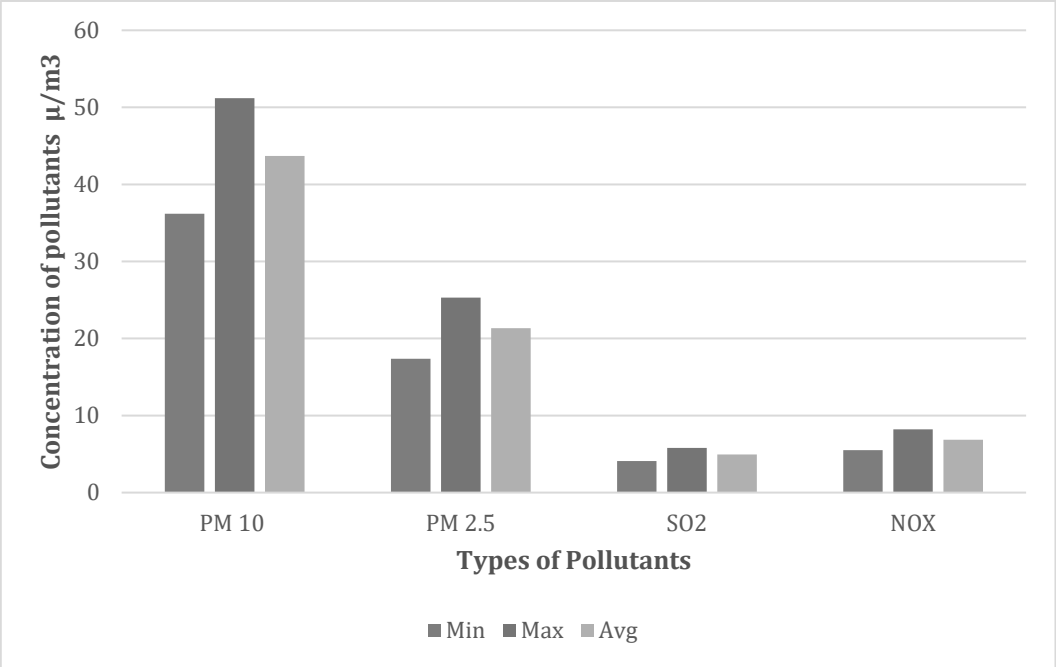

படம் 3.9 சுற்றுப்புற காற்றின் தர தரவு A4 – குன்னபாக்கம் கிராமம்

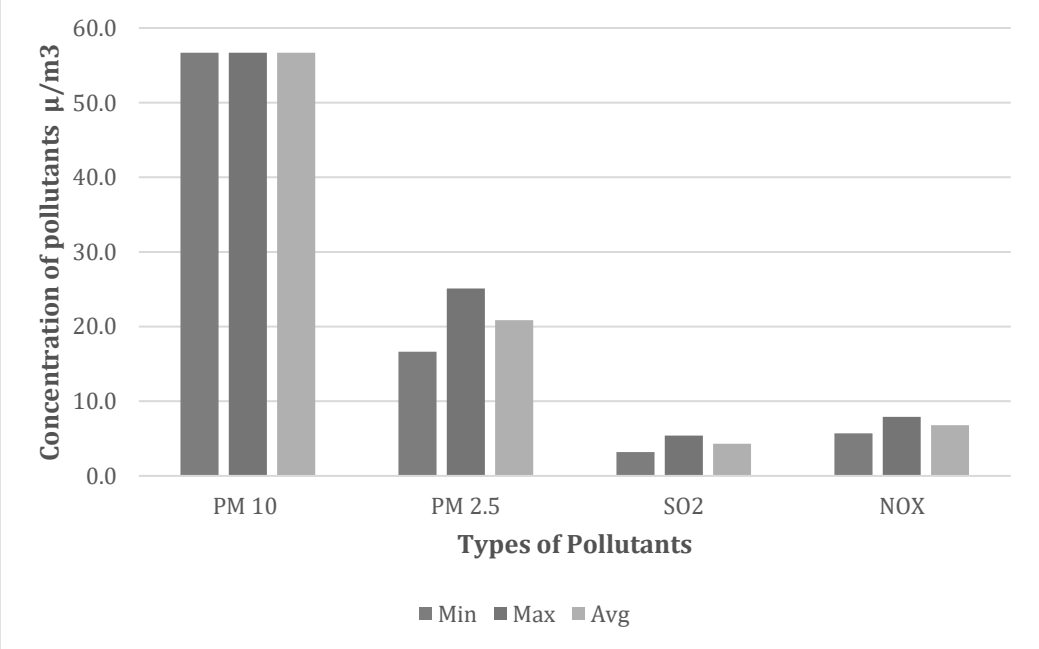

படம் 3.10 சுற்றுப்புற காற்றின் தர தரவு A5 – ஏந்தூர் கிராமம்

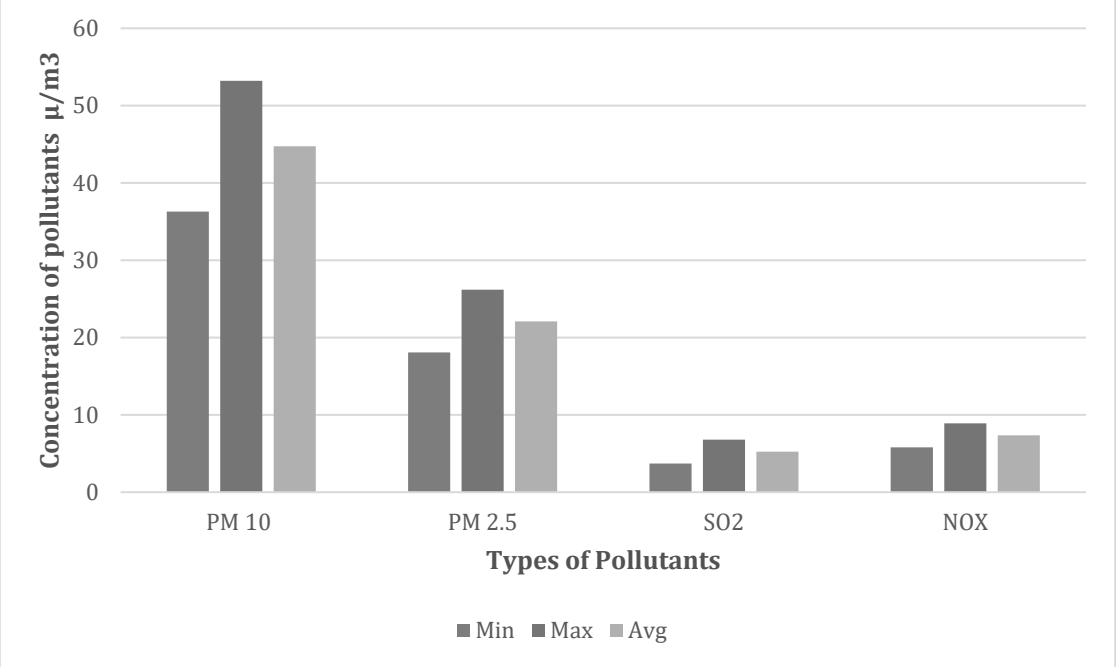

படம்3.10a சுற்றுப்புற காற்றின் தர தரவு A6 – தென்னம்பூண்டி கிராமம்

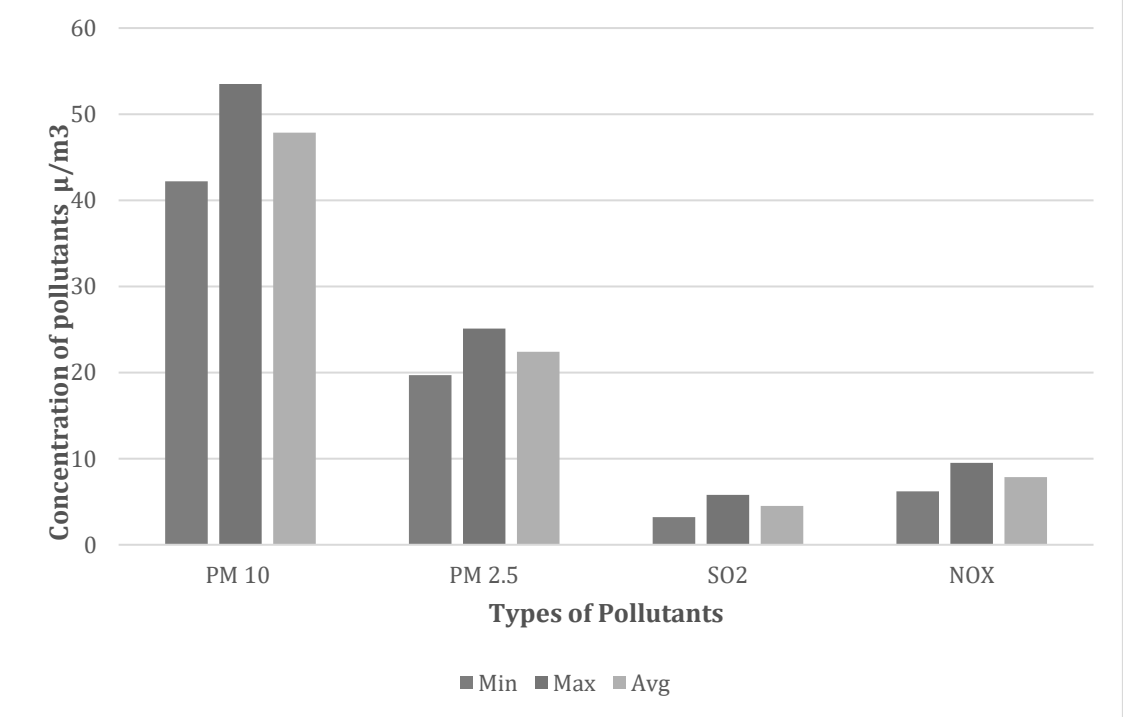

மேலே உள்ள முடிவுகளிலிருந்து, அனைத்து கண்காணிப்பு இடங்களிலும் PM10, PM2.5, SO2 மற்றும் NO2 ஆகியவற்றுடன் கூடிய சுற்றுப்புற காற்றின் தரம் CPCB ஆல் குறிப்பிடப்பட்ட அனுமதிக்கப்பட்ட வரம்புகளுக்குள் இருப்பதைக் காணலாம்.

3.3.3 நீர்சூழல்

நீர் சுற்றுச்சூழலின் அடிப்படை தரவுகளின் மதிப்பீட்டில் பின்வருவன அடங்கும்:

- நீர் ஆதாரங்களை அடையாளம் காணுதல்.
- தண்ணீர் மாதிரிகள் சேகரிப்பு.
- தரநிலைகளின்படி இயற்பியல்-வேதியியல் அளவுருக்களுக்காக சேகரிக்கப்பட்ட நீர் மாதிரிகளை பகுப்பாய்வு செய்தல்.

மேற்பரப்பு நீர்

திட்ட பகுதியின் தென்கிழக்கு திசையில் 10.71 கிமீ தொலைவில் வடபெண்ணையாறு உள்ளது. இப்பகுதியில் மிதமானமழைப் பொழிவு உள்ளது, திறந்த வெளிகிணறுகள், அகழிகளில் மழைநீர்சேமிப்பு அப்பகுதியில் நடைமுறையில் உள்ளது மற்றும் சேமிக்கப்படும் நீர்நன்னீர் ஆதாரமாக செயல்படுகிறது. மேற்பரப்பு நீரின்தரத்தின் தற்போதைய நிலை ஆய்வுக்காலத்தில் மதிப்பிடப்பட்டது. மேற்பரப்பு நீரின் தரமான இடங்கள் மற்றும் முடிவுகள் அட்டவணை 3-14 மற்றும்படம் 3.11 இல்வழங்கப்பட்டுள்ளன.

நிலத்தடிநீர்

மேற்பரப்பிலும், நிலத்தடிநீர் கிடைப்பதற்கு மழையே முக்கிய ஆதாரமாக உள்ளது. ஒவ்வொரு ஆண்டும் பருவமழையைப் பொறுத்துமழையின் அளவு மாறுபடும். இருப்பினும், மேற்பரப்பு மற்றும் நிலத்தடி நீரின் பிரித்தெடுத்தல் ஆண்டுக்கு ஆண்டு அதிகரித்துவருகிறது. இதுநீர்மட்டம் குறைதல், நீரின்தரம் மோசமடைதல் போன்ற நீர் ஆதாரங்களில் சுற்றுச்சூழல் பாதிப்புக்கு வழிவகுக்கிறது. இதுவிவசாயம், தொழில்கள், குடிநீர் மற்றும் வீட்டுதேவைகள் போன்ற பல்வேறு நோக்கங்களுக்காக கிடைக்கக்கூடிய நீரின் அளவீடு மற்றும் அதன் தரத்திற்கான கோரிக்கையை உருவாக்குகிறது. ஆய்வுப்பகுதியில் உள்ள குடியேற்றங்கள் /கிராமங்களின் துணைமேற்பரப்பு நீரின் பயன்பாட்டின் அடிப்படையில் திட்ட இடத்தைச்சுற்றியுள்ள வெவ்வேறு கிராமங்களில் மதிப்பீடு செய்வதற்காக மொத்தம் ஆறு நீர்கண்காணிப்பு இடங்கள் அடையாளம் காணப்பட்டன. நிலத்தடிநீர் முடிவுகள் குடிநீருக்கான IS: 10500 (2012) இன் படி ஏற்றுக்கொள்ளக் கூடிய மற்றும் அனுமதிக்கப்பட்ட நீரின் தரத்தரங்களுடன் ஒப்பிடப்படுகின்றன. நிலத்தடிநீர் தரகண்காணிப்பு இடங்கள் மற்றும் முடிவுகள் அட்டவணை 3.5 மற்றும்படம் 3.11 இல் கொடுக்கப்பட்டுள்ளன.

மாதிரிஇடங்கள்

இரண்டு மேற்பரப்பு நீர்மாதிரிகள் மற்றும் ஆறு நிலத்தடி நீர்மாதிரிகள் ஆய்வுப் பகுதியிலிருந்து சேகரிக்கப்பட்டு, நீர்நிலைகளில் சுரங்கம் மற்றும் பிற செயல்பாடுகளின் விளைவை மதிப்பிடுவதற்காக வேதியியல், கன உலோகங்கள் மற்றும் பாக்டீரியாவியல் அளவுருக்களுக்காக பகுப்பாய்வு செய்யப்பட்டன. CPCB, IS-10500:2012 ஆல் குறிப்பிடப்பட்ட நடைமுறைகளின் படி மாதிரிகள் பகுப்பாய்வு செய்யப்பட்டன. நீர்மாதிரி இடங்கள் அட்டவணை 3.6 இல் கொடுக்கப்பட்டுள்ளது மற்றும் படம் 3.11 ஆக காட்டப்பட்டுள்ளது.

கண்காணிப்பு இடங்கள் இதன் அடிப்படையில் தேர்ந்தெடுக்கப்பட்டன:

- முக்கிய நீர்நிலைகளின் இருப்பிடம்.
- திட்டதளத்தின் இடம்.
- அடிப்படை நிலைமைகளை பிரதிநிதித்துவப் படுத்தக் கூடிய பகுதிகள் அருகில் நீர்நிலைகள்.

அட்டவணை 3.5 நீர் மாதிரி இடங்கள்

வ.எண்	குறியீடு	இடம்	அட்சரேகை மற்றும் தீர்க்கரேகை
மேற்பரப்பு நீர்			
1	SW1	கீழ் அருங்குணம் கிராம குளம்	12°12'47.57"N 79°44'18.24"E
2	SW2	ஆட்சிபாக்கம் கிராம குளம்	12°14'35.78"N 79°46'58.16"E
நிலத்தடிநீர்			
1	GW1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	12°13'10.17"N 79°46'10.51"E
2	GW2	நல்முக்கல்	12°12'12.58"N 79°45'32.60"E
3	GW3	சீனலூர்	12°12'34.19"N 79°46'57.62"E
4	GW4	குன்னபாக்கம்	12°13'09.47"N 79°45'00.38"E
5	GW5	ஏந்தூர்	12°13'39.51"N 79°45'58.18"E
6	GW6	தென்னம்பூண்டி	12°13'44.03"N 79°46'54.41"E

படம் 3.11 நிலத்தடி நீர் மாதிரி இடங்களின் அடிப்படை வரைபடம்

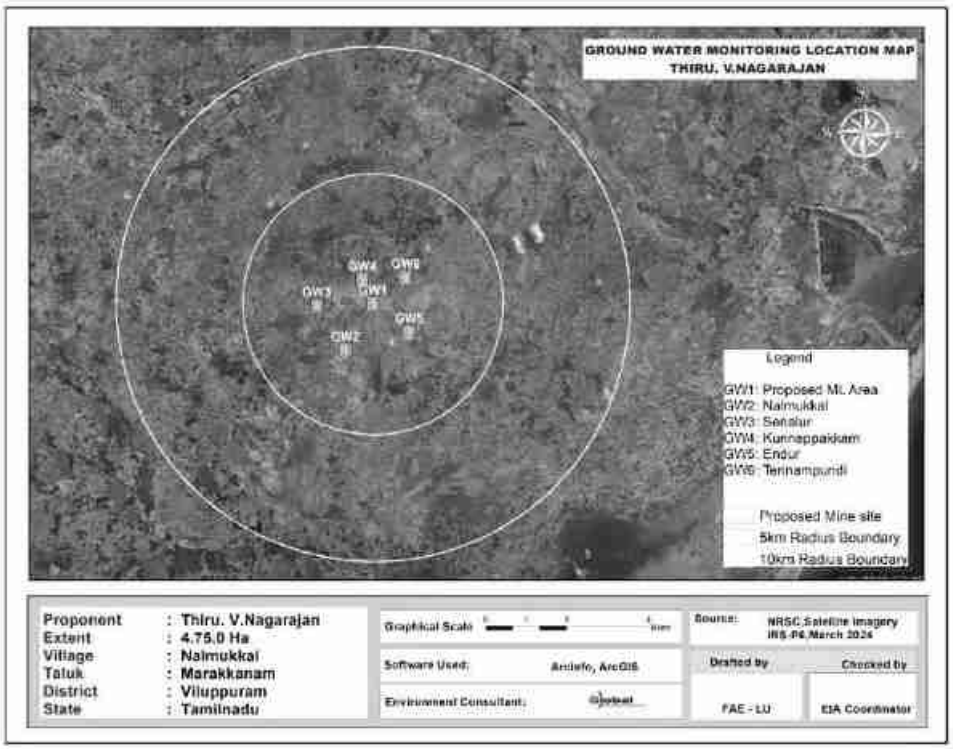

படம் 3.11 a. மேற்பரப்பு நீர் மாதிரி இடங்களின் அடிப்படை வரைபடம்

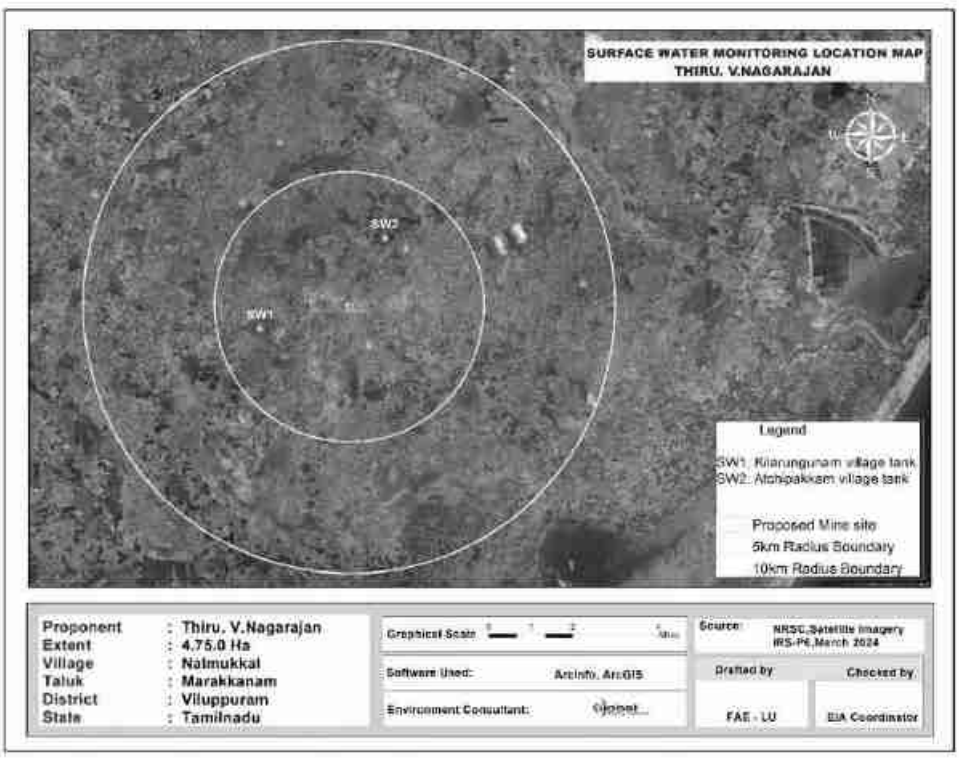

அட்டவணை 3.6 மேற்பரப்பு நீர் பகுப்பாய்வு முடிவுகள்

வ.எண்	அளவுரு	அளவு	SW1	SW2	IS2296-CLASS-A :இன் படி தரநிலைகள்
1	நாற்றம்	-	ஒத்துக் கொள்ளக் கூடியது	ஒத்துக் கொள்ளக் கூடியது	-
2	கொந்தளிப்பு	NTU	<1.0	<1.0	1
3	pH 25˚C இல்	-	7.53	6.99	6.5-8.5
4	மின் கடத்துத்திறன்	µs/cm	1012	129.5	-
5	மொத்த கரைந்த திடப்பொருள்கள்	mg/l	610	76.0	500
6	CaCO ஆக மொத்த கடினத்தன்மை$_3$	mg/l	261	27.7	-
7	Ca என கால்சியம்	mg/l	42.8	4.75	300
8	மெக்னீசியம் Mg ஆக	mg/l	37.1	3.80	-
9	CaCO ஆக கால்சியம்$_3$	mg/l	101	11.9	-
10	CaCO ஆக மெக்னீசியம்$_3$	mg/l	154	15.8	-
11	CaCO ஆக மொத்த காரத்தன்மை$_3$	mg/l	263	36.4	-
12	Cl ஆக குளோரைடு$^-$	mg/l	183	16.1	-
13	Cl ஆக இலவச எஞ்சிய குளோரின்$^-$	mg/l	BDL (D.L - 0.2)	BDL (D.L - 0.2)	250
14	சல்பேட்டுகள் SO ஆக$_4^{2-}$	mg/l	120	15.2	400
15	Fe என இரும்பு	mg/l	0.12	0.09	1.0
16	நைட்ரேட் NO ஆக உள்ளது$_3$	mg/l	3.42	1.56	20
17	ஃவுளூரைடு எஃப்	mg/l	0.36	0.14	1.5
18	Mn ஆக மாங்கனீசு	mg/l	BDL (D.L - 0.05)	BDL (D.L - 0.05)	0.5
19	COD	mg/l	BDL (D.L - 2.0)	BDL (D.L - 2.0)	-
20	BOD	mg/l	BDL (D.L - 4.0)	BDL (D.L - 4.0)	-
21	TSS	mg/l	BDL (D.L - 2.0)	BDL (D.L - 2.0)	-
22	DO	mg/l	6.1	6.3	-

மாதிரிகள் அனைத்தும் தி/ள் ஸ்ரீயண்ட் அனலிட்டிகல் & ரிசர்ச்லேப்ஸ் பிரைவேட் லிமிடெட், சென்னை மூலம் பகுப்பாய்வு செய்யப்பட்டன மற்றும் முடிவுகள் கீழே தொகுக்கப்பட்டுள்ளன.

அட்டவணை 3.7 6 இடங்களில் நிலத்தடி நீர் மாதிரி பகுப்பாய்வு முடிவுகள்							விவரக்குறிப்பு / வரம்பு (As per IS:10500: 2012)	
	W1	W2	W3	W4	W5	W6	Desirable	Permissible
நாற்றம்	ஒத்துக்கக கொள்ளக்கூடியது	ஒத்துக்கக கொள்ளக்கூடியது	ஒத்துக்ககொள்ளக்கூடியது	ஒத்துக்கக கொள்ளக்கூடியது	ஒத்துக்கக கொள்ளக்கூடியது	ஒத்துக்க கொள்ளக்கூடியது	ஒத்துக் கொள்ளக் கூடியது	
கொந்தளிப்பு	<1	<1	<1	<1	<1	<1	ஒத்துக்கொள்ளக்கூடியது	
pH 25˚C இல்	7.17	7.12	7.12	7.48	6.98	6.97	6.5 - 8.5	தளர்வு இல்லை
மின் கடத்துத்திறன்	949.9	1103	1058	1103	1529	723.7	1	5
மொத்த கரைந்த திடப்பொருள்கள்	570	666	640	670	930	440	500	2000
CaCO ஆக மொத்த கடினத்தன்மை$_3$	372	261	376	253	507	234	1	15
Ca என கால்சியம்	106	82.4	63.4	76.0	109	64.9	200	600
மெக்னீசியம் Mg ஆக	25.7	13.3	52.3	15.2	56.1	17.1	200	600
CaCO ஆக கால்சியம்$_3$	265	206	158	190	273	162	75	200
CaCO ஆக மெக்னீசியம்$_3$	107	55	218	63.4	234	71.3		
CaCO ஆக மொத்த காரத்தன்மை$_3$	303	311	412	307	416	263		
Cl ஆக குளோரைடு$^-$	139	194	180.0	196	256	102.0	250	1000
Cl ஆக இலவச எஞ்சிய குளோரின்$^-$	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	30	100
சல்பேட்டுகள் SO ஆக$_4^{2-}$	97.0	186	89.2	179.0	220	82.6	45	தளர்வு இல்லை
Fe என இரும்பு	0.05	0.06	0.02	0.05	0.04	0.02	200	400
நைட்ரேட் NO ஆக உள்ளது$_3$	2.39	2.14	1.69	3.64	4.85	3.26	1	தளர்வு இல்லை
ஃவுளூரைடு எஃப்	0.26	0.32	0.44	0.41	0.36	0.42	0.1	0.3
Mn ஆக மாங்கனீசு	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL(D.L -0.05)	குறிப்பிடப்படவில்லை	குறிப்பிடப்படவில்லை

6 இடங்களில் உள்ள EC, TDS, மொத்தகடினத் தன்மை, மொத்தகாரத் தன்மை, குளோரைடுகள் மற்றும் சல்பேட்டுகள் உள்ளிட்ட பொதுவான அளவுருக்கள் சில திட்டமிடப்பட்டு கீழேகொடுக்கப்பட்டுள்ளது.

படம் 3.12 நீர் பகுப்பாய்வில் சில பொதுவான அளவுருக்களின் மதிப்புகள்;

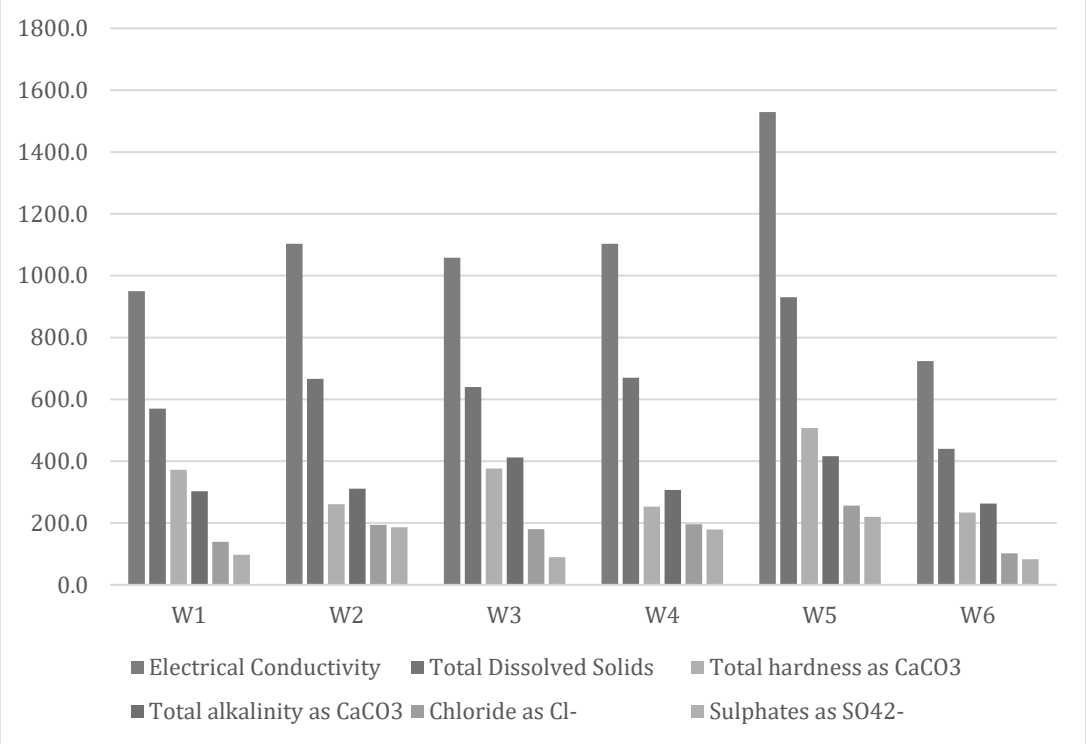

அனைத்து மதிப்புகளும் அனுமதிக்கப்பட்ட வரம்புகளுக்குள் இருப்பது கண்டறியப்பட்டது.

3.3.4 சத்தம் கண்காணிப்பு

NABL அங்கீகாரம் பெற்ற ஆய்வகத்தால் இரைச்சல் நிலை மீட்டரைப் பயன்படுத்தி இரைச்சல் நிலை கண்காணிப்புத்து கணக்கிடப்பட்டது மற்றும் முடிவுகள் கீழே கொடுக்கப்பட்டுள்ளன.

படம் 3.13 இரைச்சல் கண்காணிப்பு இடங்கள் கொடுக்கப்பட்டுள்ளன

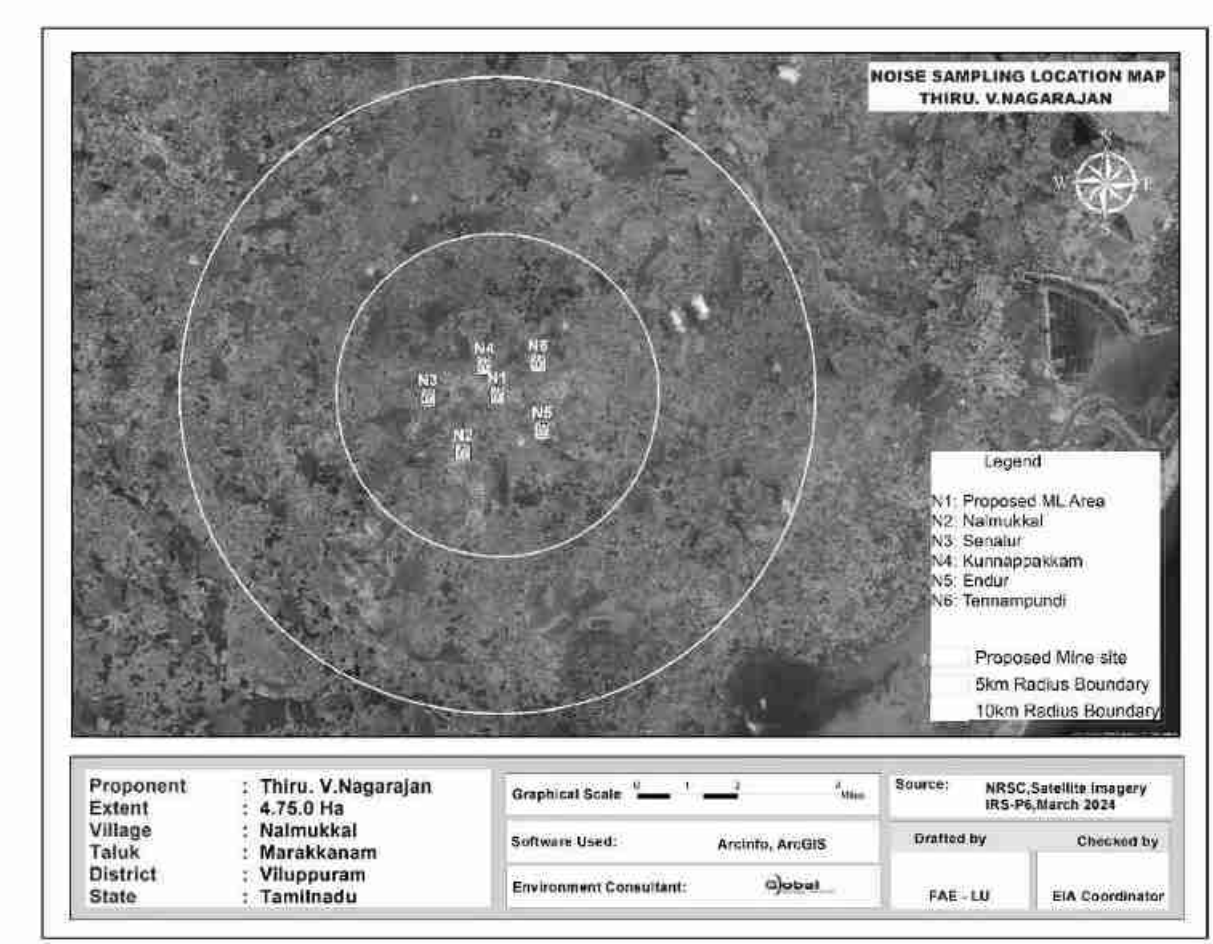

முடிவுகள் கீழே உள்ள அட்டவணையில் கொடுக்கப்பட்டுள்ளன.

அட்டவணை 3.8 இரைச்சல் கண்காணிப்பு முடிவுகள்					
வ. எண்	**நிலையம்**	**பகல் வரம்பு**	**இரவு வரம்பு**	**பகலுக்கு சமமான வரம்புகள் CPCB**	**இரவுக்கு சமமான வரம்புகள் CPCB**
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	39.3	38.0	75	70
2	நல்முக்கல்	50.5	41.8		
3	சீனலூர்	48.3	39.8		
4	குன்னபாக்கம்	50.9	42.2		
5	ஏந்தூர்	46.8	40.8		
6	தென்னம்பூண்டி	45.5	42.0		

முடிவுகள் கீழே கொடுக்கப் பட்டுள்ளன

படம் 3.14 6 இடங்களில் பகல் மற்றும் இரவு சமமான மதிப்புகள்

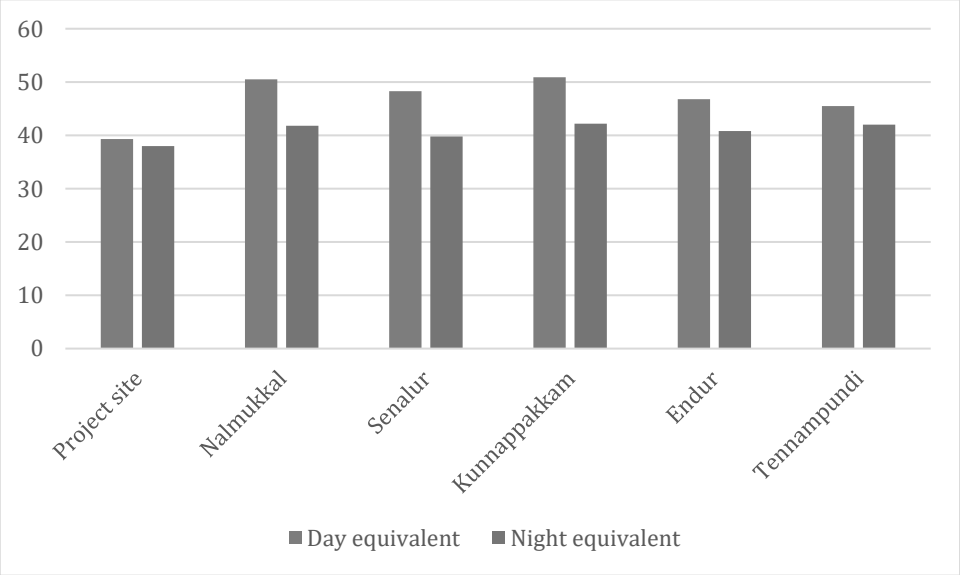

அனைத்து மதிப்புகளும் CPCB விதிமுறைகளுக்குள் இருப்பது கண்டறியப்பட்டது.

3.3.5 மண்மாதிரி பகுப்பாய்வு

சுரங்க குத்தகை பகுதி மற்றும் சுரங்க குத்தகை பகுதி சுற்றி நல்முக்கல், சீனலூர், குன்னபாக்கம், ஏந்தூர், தென்னம்பூண்டி ஆகிய கிராமங்களில் இருந்து 6 இடங்களில் மண் மாதிரிகள் சேகரிக்கப்பட்டுள்ளன. இடங்கள் கீழே உள்ளபடத்தில் காட்டப்பட்டுள்ளன.

படம்3.15 மண் மாதிரி இடங்கள்

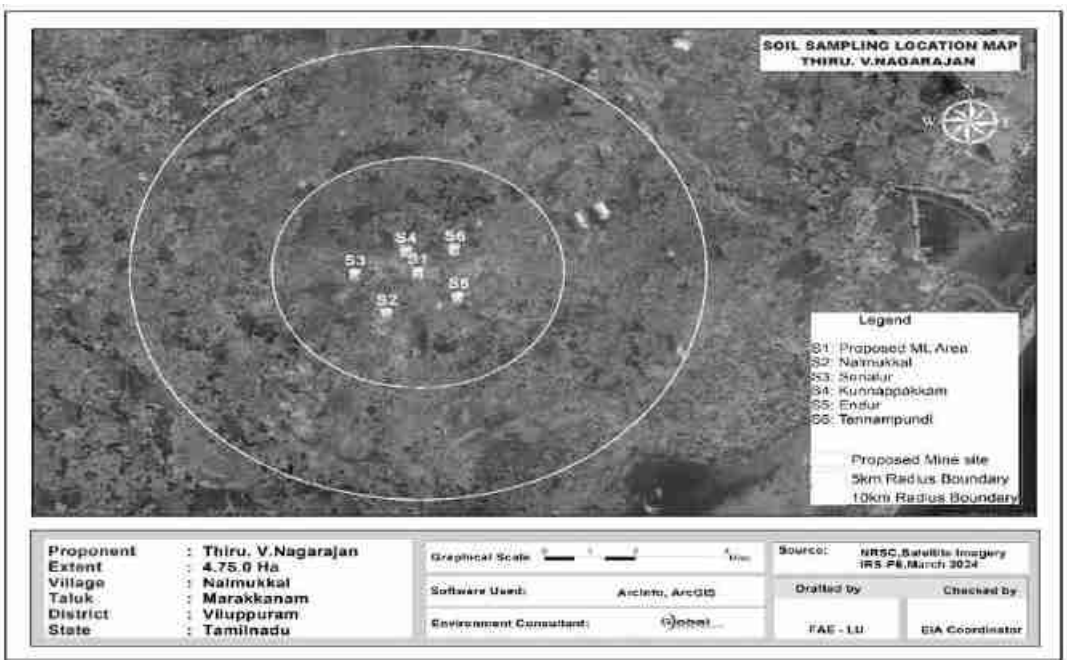

முடிவுகள்கீழேஉள்ளஅட்டவணையில்சுருக்கப்பட்டுள்ளன

அட்டவணை 3.9 மண் மாதிரி பகுப்பாய்வின் முடிவுகள்								
வ. எண்	**அளவுரு**	**அலகு**	**S1**	**S2**	**S3**	**S4**	**S5**	**S6**
வ.எண்	அளவுரு	அலகு	முடிவுகள்	முடிவுகள்	முடிவுகள்	முடிவுகள்	முடிவுகள்	முடிவுகள்
1	PH	-	5.94	7.68	7.03	6.99	8.14	8.73
2	EC	µmhos/cm	70.24	492.7	100.8	150.7	214	509.8
3	உலர் பொருள்	%	91.06	88.49	90.4	85.94	88.09	91.15
4	தண்ணீர் அளவு	%	8.94	11.51	9.6	14.06	11.91	8.85
5	ஆர்கானிக் மேட்டர்	%	1.63	2.3	1.71	1.59	0.68	0.8
6	மண் அமைப்பு	-	சில்ட்டி லோம்	சில்ட்டி களிமண்	சில்ட்டி லோம்	சில்ட்டி களிமண்	சில்ட்டி களிமண்	சில்ட்டி களிமண்
7	தானிய அளவு விநியோகம் மணல்	%	36.95	4.89	41.47	6.56	4.27	5.78
8	SILT	%	53.74	66.25	50.41	43.6	62.07	55.84
9	களிமண்	%	9.31	28.86	8.12	49.84	33.66	38.38
10	பாஸ்பரஸ்	mg/kg	1.21	0.59	1.03	1.22	0.74	0.82
11	சோடியம்	mg/kg	845	921	976	732	610	1002
12	பொட்டாசியம்	mg/kg	412	652	724	456	795	669
13	கேஜெல்டால் நைட்ரஜன்	mg/kg	212	260	312	405	168	340
14	கந்தகம்	%	BDL(D.L. 0.02)	BDL(D.L. 0.02)	BDL(D.L. 0.02)	BDL(D.L.0.02)	BDL(D.L.0.02)	BDL(D.L.0.02)
15	போரசிட்டி	%	12.5	13.1	11.9	12.6	13.6	13.2
16	நீர் தாங்கும் திறன்	Inches/foot	42	45.6	44	49	46	48

3.3.6 உயிரியல் சூழல்

தற்போதுள்ள தாவரங்கள் மற்றும் விலங்கினங்களின் சூழலியல் நிலையைப்புரிந்து கொள்வதற்கும், அடிப்படைத்தகவல்களை உருவாக்குவதற்கும், உயிரியல் சூழலில் ஏற்படக்கூடிய தாக்கங்களை மதிப்பிடுவதற்கும் இப்பகுதியின் உயிரியல் ஆய்வு நடத்தப்பட்டது. விவரங்கள் கீழேகொடுக்கப்பட்டுள்ளன.

ஆய்வுப் பகுதியில் உள்ள தாவரங்கள்

ஆய்வுப் பகுதியில் உள்ள தாவரங்களின் அளவை அளவிடுவதற்கு கள ஆய்வு மேற்கொள்ளப்படுகிறது, நான்கு பகுதிகளாக பிரிக்கப்பட்டுள்ளது. ஒவ்வொரு நாற்புறத்திலும் உள்ள தாவர எண்ணிக்கை ஆய்வுப்பகுதியில் உள்ளமொத்த எண்ணிக்கைக்கு சுருக்கப்பட்டுள்ளது. மேலும், மாநில வனத்துறையின் தரவு பயன்படுத்தப்படுகிறது. ஒவ்வொரு வகைக்கும் பயன்படுத்தப்படும் நாற்கரங்கள் கீழே கொடுக்கப்பட்டுள்ளன:

முக்கியமண்டலம்

களப் பயணத்தின் போது, 10கிமீ சுற்றளவில் தேசிய பூங்காக்கள் / சரணாலயங்கள் இல்லை என்பது கவனிக்கப்பட்டது. ஆய்வுப் பகுதியில் பெரிய தோட்டங்கள் எதுவும் இல்லை.

அட்டவணை 3.10 மையமண்டலத்தில் உள்ள தாவரங்கள்

வ.எண்	அறிவியல் பெயர்	உள்ளூர்பெயர் /ஆங்கிலப்பெயர்	தாவரவகை
1	கலோட்ரோபிஸ் ஜிகாண்டியா	எருக்கு	புதர்கள்
2	கேசின ஆரிகுலட்டா	அவரை	
3	அச்ரந்திஸ் அசபெற	நாயுருவி	

இடைப்பகுதி

பொதுவான மரங்கள், புதர்கள், புதர்கள் போன்றவை மட்டுமே காணப்படுகின்றன. பட்டியல் கீழே கொடுக்கப்பட்டுள்ளது.

அட்டவணை 3.11 தாங்கல் மண்டலத்தில் உள்ள தாவரங்கள்

வ.எண்	அறிவியல் பெயர்	உள்ளூர்பெயர் /ஆங்கிலப்பெயர்	தாவரவகை
1	அசாடிராக்டா இண்டிகா	வேப்பம்	மரம்
2	கரிகாபாப்பைய	பப்பாளி	
3	மங்கிஃபெரா இண்டிகா	மாங்காய்	
4	அகாசியாலுகோஃப்ளோயா	வேலமரம்	
5	வச்செலியா நிலோட்டிகா	கரு-வேலமரம்	
6	மோரிங்கா ஒலிஃபெரா	முருங்கை	
7	தமரின்டுஸ் இண்டிகா	புளி	
8	டெக்டோனாகிராண்டிஸ்	தேக்கு	

9	மணில்கராஜபோட்டா	சபோட்டா	
10	மூசாபரதீசியாகா	வாழை	
11	போராசஸ் ஃபிளாபெல்லிஃபார்மிஸ்	பனை	
12	ஃபிகஸ்பெங்காலென்சிஸ்	ஆலமரம்	
13	பிக்ஸ்ரெலிகோசிய	அரசமரம்	
14	பஹைள்ளந்துஸ் எம்பிளிக்கா	நெல்லி	
15	கலோட்ரோபிஸ் ஜிகாண்டியா	எருக்கு	புதர்
16	காசியா ஆரிகுலாட்டா	அவரை	
17	ரிசினஸ் கம்யூனிஸ்	ஆமணக்கு	
18	டெகோமா ஸ்டான்ஸ்	அரளி	
19	ஆலோ வீர	கற்றாழை	
20	கதரந்தஸ் ரோஸஸ்	நித்தியகல்யாணி	மூலிகை
21	அகலிபா இண்டிகா	குப்பைமேனி	
22	கொக்கினியா கிராண்டிஸ்	கோவை	கொடிகள்
23	சிசஸ் குவாட்ராங்குலரிஸ்	பிரண்டை	
24	ஜாஸ்மினம் அங்கஸ்டிஃபோலியம்	மல்லி	
25	ஜிசிபஸ் ஓனோப்லியா	இலந்தை	
26	சிம்போபோகன்	கணம்	புல்
27	சைபரஸ் ரோட்டுண்டஸ்	கோரி புல்	
28	சைனோடான் டாக்டைலான்	அருகு	

ஆய்வு பகுதியில் விலங்கினங்கள்

குத்தகை முன்மொழியப்பட்ட பகுதியில் குறிப்பிட்ட விலங்கினங்கள் எதுவும் இல்லை. இப்பகுதியில் உள்ளதாங்கல் மண்டல விலங்கினங்கள் நேரடி கண்காணிப்பு முறை மூலம் ஆய்வு செய்யப்படுகிறது. வனத்துறையிலிருந்து சேகரிக்கப்பட்ட இரண்டாம் நிலைத்தரவுகள் இந்த அறிக்கையில் பயன்படுத்தப் பட்டுள்ளன. அருகில் உள்ள மக்களிடமும் ஆலோசனை நடத்தப்பட்டது. இப்பகுதியில் பொதுவாகக் காணப்படும் விலங்கினங்கள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 3.12 தாங்கல் மண்டலத்தில் விலங்கினங்கள்

வ. எண்	அறிவியல் பெயர்	உள்ளூர் பெயர் / ஆங்கிலப் பெயர்	இனம்	இனங்கள் சேர்ந்த அட்டவணை
1	கேனிஸ்பாமிலியாரிஸ்	நாய்	பாலூட்டிகள்	IV
2	ஃபெலிஸ்கேடஸ்டொமஸ்டிகஸ்	பூனை		IV
3	கொலுண்டாஎலியோட்டி	எலி		IV
4	புனபபஸ் பல்மரும்	அணில்		IV
5	லெபஸ்நிக்ரிகோலிஸ்	முயல்		IV
6	போஸ் இன்டிகஸ்	நட்டுமாடு		IV
7	காமன் குரோவ்	காகம்	பறவை	V
8	ஹவுஸ்ஸ்பர்ரோ	வீட்டுகுருவி		IV

9	காமன்மைனா	மைனா		IV
10	ஸ்ட்ரெப்டோபீலியாசினென் சிஸ்	புற		IV
11	கலோட்ஸ்வெர்சிகோலர்	பல்லி	ஊர்வன	IV
12	பய்டஸ் முகச	பாம்பு		IV
13	ராணாஹெக்ஸாடாக்டைலா	தவளை		IV

3.3.7 நில பயன்பாடு

ரிமோட்சென்சிங் செயற்கைக்கோள் தரவு ஆய்வுக்கு பயன்படுத்தப்பட்டது

நிலபயன்பாடு மற்றும் நிலப்பரப்பு ஆய்வுக்கு, ஜியோ EYE இன் செயற்கைக்கோள் தரவு பயன்படுத்தப்பட்டது. திட்டத்தின் 10 கிமீ சுற்றளவில் தூரத்தைக்காட்டும் நிலப்பயன் பாட்டுவரைபடம். புவியியல் ஒருங்கிணைப்புகள் அட்சரேகை12 :°13'"05.24N முதல் 12°13'"14.52N வரை மற்றும் தீர்க்கரேகை79 :°46'"07.17E முதல்79 °46'"16.18E வரை.

படம்எண். 3.16: ரிமோட்சென்சிங் செயற்கைக்கோள் படம்

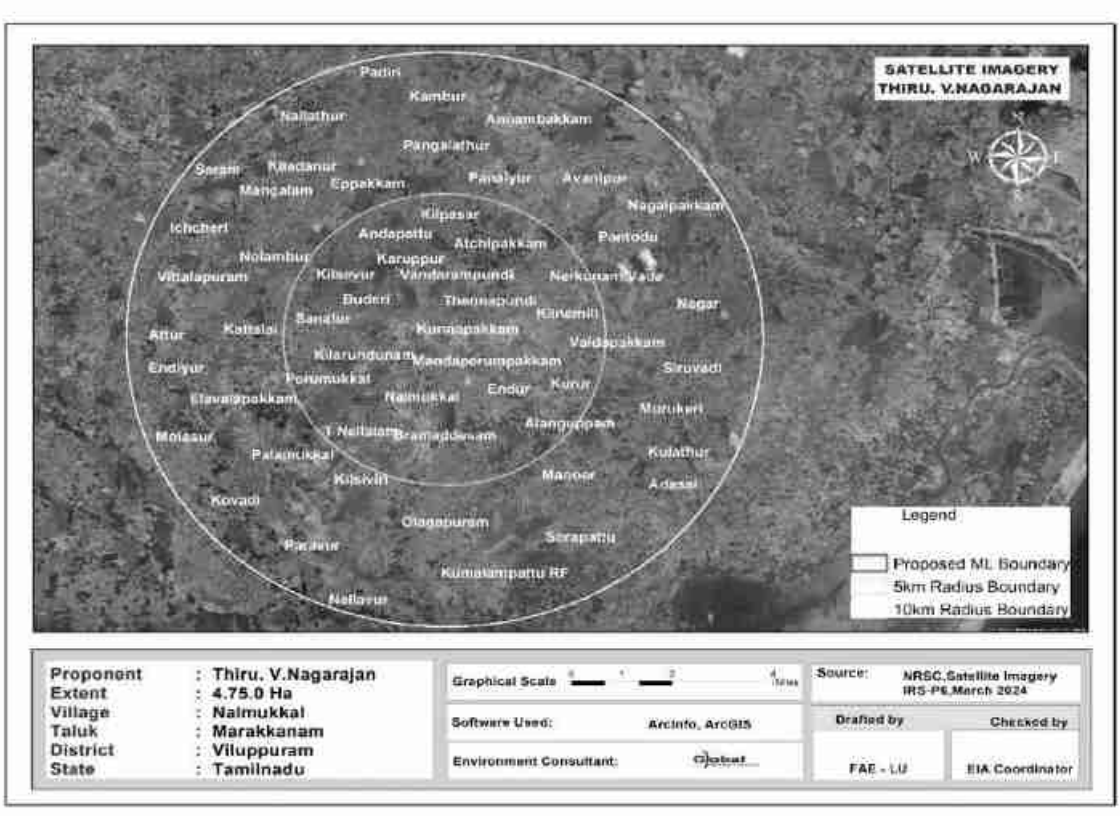

தொலைநிலை உணர்திறன் செயற்கைக்கோள் படத்தின் (RSI) இலவசதரவு மற்றும் முக்கிய நிலப்பரப்பு மற்றும் நிலப்பரப்பு (LULC) வகையின் விளக்கம். செயற்கைக்கோள் தரவுகளை ஆய்வு செய்ததில், கிளஸ்டர் வசிப்பிடத்தின் காரணமாக கோடையில் குறைந்த சதவீதத்துடன் இப்பகுதி எப்போதும் மேகங்களால் மூடப்பட்டிருக்கும். ஆனால் தென்மேற்கு பருவமழையின் போதுமழை பெய்தபயிர்கள் பயிரிடப்படுகின்றன, எனவே

முதல்மழைப் பொழிவின் போதுபெறப்பட்ட தரவுவி வசாய வகையின் பயிர் மற்றும் தரிசு நிலங்களை வரையறுக்க விரும்பப்படுகிறது.

ஸ்க்ரப்நிலத்தை வரையறுப்பதும் சாத்தியமாகும், ஏனெனில் ஸ்க்ரப் உள்ள நிலத்தை பயிர்தாவரங்களிலிருந்து எளிதாக வேறுபடுத்திப்பிரிக்கலாம். பருவமழையின் போது இதுகடினமான பணியாக இருக்கலாம், ஏனெனில் முழுப்பகுதியும் திடீரென முளைக்கும் பசுமையான இயற்கை தாவரங்கள், பெரும்பாலும் புரோசோபிஸ், முதல்மழைப் பொழிவுடன் காணப்படும்.

நிலப்பயன்பாட்டு ஆய்வுக்காக ஏற்றுக் கொள்ளப்பட்ட முறை

தற்போதையஆய்வில் 10 கிமீ சுற்றளவைக்காட்டும் நிலப்பரப்பு வடிவத்தின் மைக்ரோலெவல் பகுப்பாய்வு மற்றும் செயற்கைக்கோள் தரவைப் பயன்படுத்தி நிலப்பரப்பு வடிவத்தில் மாற்றங்கள் ஆகியவை அடங்கும். இது நன்கு வரையறுக்கப்பட்ட முறையைப்பின் பற்றி செயற்கைக்கோள் தரவுகளை கவனமாக பகுப்பாய்வு செய்ய வேண்டும். தேவையைப் பூர்த்தி செய்வதற்காக, நிலப்பரப்புக்கும் நிலப்பரப்புக்கும் இடையிலான உறவை ஊகிக்க உதவும் டிஜிட்டல் பகுப்பாய்வைப்பயன் படுத்தி நிலப்பரப்பின் ஆரம்பமதிப்பீடு மேற்கொள்ளப்பட்டுள்ளது. இத்தகைய அணுகுமுறை நிலப்பரப்பு அலகுகள் பற்றிய தெளிவான புரிதலை வழங்குகிறது மற்றும் தாக்கமதிப்பீட்டிற்கு உதவும் நிலப்பரப்பு முறைபற்றிய அறிவை மேம்படுத்துகிறது.

இவ்வாறு உருவாக்கப்படும் அறிவுத்தளமானது செயற்கைக்கோள் படத்தின் விளக்கத்தை மேற்கொள்ளும்போது பல்வேறு நிலப்பரப்பு அலகுகளை வரையறுப்பதற்குப் பயன்படுத்தப்படுகிறது. பெறப்பட்ட நிலப்பரப்பு தகவல் புவி-குறிப்பு நுட்பங்களைப் பயன்படுத்தி GIS அடிப்படையிலான இடஞ்சார்ந்த தரவுத்தளமாக மாற்றப்படுகிறது. தவிர, வரையறுக்கப்பட்ட ஆனால் நன்கு கவனம் செலுத்தப்பட்ட களவிசாரணையும் மேற்கொள்ளப்பட்டது மற்றும்கை யடக்கஜிபிஎஸ் (குளோபல்பொசிஷனிங்சிஸ்டம்) பயன்படுத்திகுறிப்பிடத்தக்க நிலப்பரப்பு அலகுகளின் ஒருங்கிணைப்புகள் புவி-குறிப்புக்கான கட்டுப்பாட்டு புள்ளிகளாகப் பயன்படுத்தப்படுகின்றன. இறுதி நிலப்பரப்புவரை படத்தைத் தயாரிப்பதற்கு முன் தேவைப்படும் இடங்களில் தேவையான திருத்தங்களைச் செய்ய, புலத்தில் விளக்கப்பட்ட நிலப்பரப்பு அலகுகள் சரிபார்க்கப்படுகின்றன.

வண்ணம், தொனி, அமைப்பு, அளவு, வடிவம் மற்றும் தொடர்புடைய கூறுகள் போன்ற படக்கூறுகளைப் பயன்படுத்தி, விண்வெளித்துறையின் தேசியதொலை நிலை உணர் திறன் மையம் (NRSC) பரிந்துரைத்தபடி, தேசிய அளவிலான நிலப்பரப்பு வகைப்பாடுமுறைக்கு ஏற்றுக் கொள்ளப்பட்ட வகைப்படுத்தல் மற்றும் பெயரிடலைப் பின் பற்றி பல்வேறு நிலப்பரப்பு அலகுகள் வரையறுக்கப்படுகின்றன. , இந்தியஅரசு.

களசரிபார்ப்பு:

FCC இல் குறிப்பிட்ட நிறமாலை கையொப்பங்கள் / படவெளிப்பாடுகளை உருவாக்கும் பல்வேறு மேற்பரப்பு அம்சங்களின் சேகரிப்பு, சரிபார்ப்பு மற்றும் பதிவு ஆகியவை புலசரிபார்ப்பில் அடங்கும். ஆய்வுப்பகுதியில், படங்களின் விளக்கத்தின் போது அடையாளம் காணப்பட்ட சந்தேகத்திற்கிடமான பகுதிகள் முறையாக பட்டியலிடப்பட்டு, தரை சரிபார்ப்பிற்காக தொடர்புடைய SOI நிலப்பரப்பு வரைபடங்களுக்கு மாற்றப்படும். இவை தவிர, அனைத்து வெவ்வேறு வகுப்புகளும் குறைந்தது 8 மாதிரிப்பகுதிகளால் மூடப்பட்டிருக்கும் வகையில், அப்பகுதியில் சமமாக விநியோகிக்கப்படும் வகையில், விளக்கப்பட்ட LU/LC வகுப்புகளைச் சரிபார்க்க, SOI நிலப்பரப்பு வரைபடங்களைக் கொண்டு பயணப்பாதைகள் திட்டமிடப்பட்டன. LU/LC வகுப்புகளை உள்ளடக்கிய நிலஉண்மை விவரங்கள் மற்றும் பயிர்வளர்ச்சி நிலை, வெளிப்படும் மண், நிலப்பரப்பு, இயற்கை மற்றும் நிலச்சிதைவின் வகைபற்றிய பிற துணைத்தகவல்கள் பதிவு செய்யப்பட்டு, வெவ்வேறு நில பயன்பாட்டு வகுப்புகள் நிலபயன்பாட்டு வரைபடத்தில் எடுக்கப்படுகின்றன.

அட்டவணை எண்.3.13: ஆய்வுப் பகுதியின் முக்கிய நிலப்பரப்பு அலகுகள்

வ.எண்.	முதல் நிலை வகைப்பாடு	இரண்டாம் நிலை வகைப்பாடு
1	கட்டிடம் அல்லது வசிப்பிடம்	குடியிருப்பு
		வணிகம் / தொழில்துறை
2	வேளாண்மை	பயிர் / தரிசுநிலம்
		தோட்டம்
3	நீர்நிலைகள்	நீர்த்தேக்கம் / ஏரி / குளம்
		நதி
4	தாவரஅடர்த்தி	ஸ்க்ரப்
		தாவரங்கள்
		சதுப்புநிலங்கள்
5	தரிசுநிலம்	ஓபன் வித் ஸ்க்ரப்
		ஓபன் விதௌட் ஸ்க்ரப்
6	மற்றவைகள்	மட்ப்லொவ்
		உப்பளம்
		செங்கல்உற்பத்தி

திட்ட தளத்தின் 10 கிமீ சுற்றளவில் பஃபர் பகுதியின் நிலபயன்பாட்டுமுறை

தற்போதுள்ள நிலபயன்பாட்டு முறை மற்றும் முழுகையகப்படுத்தப்பட்ட தொகுதியின் நிலப்பரப்பு விநியோகம், களஆய்வுகளின் போது செயற்கைக்கோள் படங்கள் மற்றும் அடுத்தடுத்த நிலச்சரி பார்ப்பு ஆகியவற்றிலிருந்து ஆய்வு செய்யப்பட்டுள்ளது.

இது முக்கியமாக காரீஃப் (காரிஃப்: ஜோவர், பஜ்ரா, பருத்தி, முதலியன. பருவம்: ஜூலை முதல் அக்டோபர் வரை) மற்றும் ராபி (ராபி: கோதுமை, ராய் போன்றவை. பருவம்: டிசம்பர் முதல் மார்ச் வரை) இரண்டு ஆண்டு பயிர்களைக் கொண்ட விவசாய நிலங்களைக் கொண்டுள்ளது. விவசாய நிலத்தின் இருப்பை தொடர்ந்து சில அடர்ந்த குடியிருப்புகள் நல்முக்கல் கிராமம், இயற்கை அல்லது மனிதனால் உருவாக்கப்பட்ட குளம் போன்றவை. மழைப்பற்றாக்குறை, ஆழமான மட்டத்தில் நிலத்தடி நீர் இருப்பு மற்றும் பிற தட்பவெப்ப நிலை. போதுமான நிலம் இருந்தும் நல்ல விவசாய உற்பத்தியை ஆதரிக்க வேண்டாம். ஆய்வுப் பகுதிக்குள் வரையறுக்கப்பட்ட வன நிலம் இல்லை, இருப்பினும், 10 கிமீ சுற்றளவு முழுவதும், குறிப்பாக கிராமங்களின் சுற்றளவில் சில சிதறிய காடுகள் காணப்படுகின்றன.

மைய மற்றும் இடையகத்தின் பொதுவான நிலப்பரப்பு முறையானது நான்கு முக்கிய வகைகளாகப் பிரிக்கப்படலாம் - கட்டுமானம் அல்லது குடியிருப்பு, விவசாயம், நீர்நிலைகள், கழிவு நிலம் மற்றும் பிற வகைகளாகும். கிராமங்கள், நகரம் மற்றும் உள்கட்டமைப்பு ஆகியவற்றைக் கட்டமைத்தல் அல்லது குடியிருப்பு வகையின் கீழ் உள்ளடக்கியது. விவசாயப் பிரிவின் கீழ் பயிர் நிலம் / தரிசு நிலம் மற்றும் தோட்டமாக கருதப்படுகிறது. நீர்நிலை வகைகளின் கீழ் நீர்த்தேக்கம்/ ஏரி, குளம், ஆறு மற்றும் ஓடை. தரிசு நிலம் வகையின் கீழ், ஸ்க்ரப் நிலம் என்று கருதப்படுகிறது மற்றும் ஸ்க்ரப் இல்லாத நிலம் விளக்கப்படுகிறது. கடைசியாக மற்ற வகை சுரங்கப் பகுதி மற்றும் காடுகள் இந்த வகையின் கீழ் விளக்கப்படுகின்றன. வண்ணம், தொனி, அமைப்பு, அளவு, வடிவம் மற்றும் தொடர்புடைய கூறுகள் போன்ற படக் கூறுகளைப் பயன்படுத்தி தேர்ந்தெடுக்கப்பட்ட செயற்கைக்கோள் படத்திலிருந்து இந்த வகைகள் வரையறுக்கப்படுகின்றன. வரையறுக்கப்பட்ட நிலப்பரப்பு அலகுகள் GIS சூழலில் இடஞ்சார்ந்த தரவுத்தளமாக மாற்றப்படுகின்றன. ஆய்வுப் பகுதியில் உள்ள LULC இன் மொத்தப் பரப்பளவு 322 சதுர கிமீ என கணக்கிடப்பட்டு, தாங்கல் பகுதிக்குள் பல்வேறு LULC வகைகளின் இடப் பரவல் கீழே விவாதிக்கப்படுகிறது. 5 கிமீ மற்றும் 10 கிமீ சுற்றளவு நிலப்பரப்பு வரைபடம் மேலே காட்டப்பட்டுள்ளது. விவரங்கள் கீழே கொடுக்கப்பட்டுள்ளன.

படம் 3.17 நிலபயன்பாடு/ஆய்வுப் பகுதியின் நில அட்டை வரைபடம்

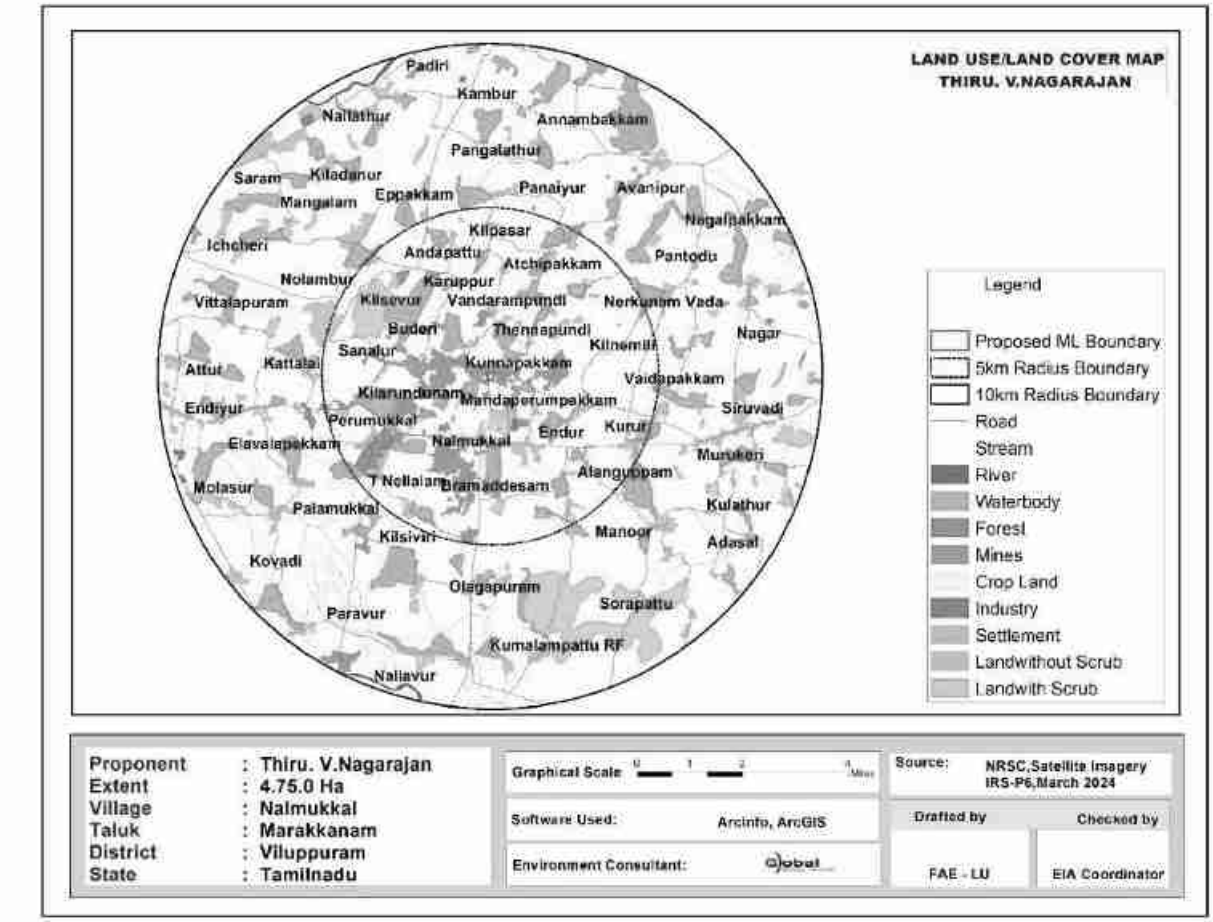

நிலப்பயன்பாடு / நிலப்பரப்பு வகைப்பாடு முதல்நிலை வகைப்பாடு மற்றும் இரண்டாம் நிலைவகைப்பாடு எனவகைப் படுத்தப்பட்டது மற்றும் நிலைII வகைப்பாட்டைத் தொடர்ந்து ஆய்வுப் பகுதியில் முக்கிய நிலப்பயன்பாடு /நிலப்பரப்பு வகுப்புகள் வரையறுக்கப்பட்டன. திட்டத்தின் பரப்பளவைக் கருத்தில்கொண்டு இந்தவகைப் படுத்தப்பட்ட வகைகளை உள்ளடக்கி 1:50,000 அளவிலான கருப்பொருள்வ ரைபடம் உருவாக்கப்பட்டது.

குடியேற்றங்கள்

ஆய்வுப் பகுதியில் உள்ள குடியிருப்புகள் பொதுவாக சிறியது முதல் நடுத்தர அளவு உயரம் மற்றும் சிதறிய பகுதி. ஆய்வுப் பகுதியின் வடக்குப் பகுதியில் காணப்பட்ட ஒப்பீட்டளவில் பெரிய குடியிருப்புகள் மரக்காணம் ஆகும்.

செயற்கைக்கோள் படத்திலிருந்து தீர்வுக்கான விளக்கம் நிறம், தொனி, அமைப்பு மற்றும் அங்கம் போன்ற படத்தின் கூறுகளை அடிப்படையாகக் கொண்டது.

இது அவர்களின் வழக்கமான சிவப்பு நிறத்தால் வரையறுக்கப்படுகிறது. சாலைகள் போன்ற நேரியல் அம்சங்களுடனான தொடர்பு குடியேற்றங்களை வரையறுத்திருப்பதை மீண்டும் உறுதிப்படுத்தியது. 25.76 சதுர கிலோமீட்டர் பரப்பளவில் ஆய்வுப் பகுதியின் 8.05% மற்றும் தொழில்துறை + வணிகப் பகுதி 0.63% உடன் 2.02சதுர கி.மீ.

விவசாயநிலம்

விவசாய பயிர் நிலம், தரிசு நிலம் மற்றும் தோட்டம் என்ற பரந்த வகையின் கீழ் வரையறுக்கப்பட்டுள்ளது. நீர்ப்பாசன நடவடிக்கைகள் நன்றாக இருப்பதற்காக பெரும்பாலும் ஆற்று நீரை நம்பியே சாகுபடி செய்யப்படுகிறது. ஒவ்வொரு கிராமத்திலும் உள்ள ஆறுகள், குளங்கள் மற்றும் குளங்கள் மழைநீர் சேமிப்பு அலகுகளாக செயல்படுகின்றன மற்றும் வீட்டுத் தேவை மற்றும் சாகுபடியை ஓரளவுக்கு ஆதரிக்கின்றன. இந்த நிலைமைகளின் காரணமாக, சோளம், சூரியகாந்தி, எண்ணெய் வித்துக்கள், கிராம்கள், தினை மற்றும் கொத்தமல்லி போன்ற குறைந்த அளவு தண்ணீர் தேவைப்படும் பயிர்கள் பயிரிடப்படுகின்றன. பயிரிடப்படுவது மிகவும் முதன்மையான பயிர், அது தோல்வியடைந்தாலும், அவற்றின் தண்டுகள் கால்நடைகளுக்கு தீவனமாக பயன்படுத்தப்படுகின்றன.

பயிர் மற்றும் தரிசு நிலம், ஒளி முதல் பச்சை, மென்மையானது முதல் நடுத்தர தொனி போன்ற உருவ உறுப்புகளைப் பயன்படுத்தி விளக்கப்படுகிறது, அவை தாங்கல் பகுதியில் வரையறுக்கப்பட்ட இரண்டாவது மிக முக்கியமான நிலப்பரப்பு வகையாகும். முன்னர் விளக்கியது போல், சாகுபடி பெரும்பாலும் ஆறு, கால்வாய் மற்றும் மழையைப் பொறுத்தது மற்றும் பெரும்பாலான நிலங்கள் உழவு செய்யப்பட்டு, ஒரு சிறிய கால்வாயில் கூட சாகுபடிக்கு தயாராக உள்ளன. எனவே, விளைநிலம் 247.3 ச.கி.மீ என மதிப்பிடப்பட்ட முக்கிய வகையாகும், இது தாங்கல் பகுதியில் 76.80% ஆகும்.

தரிசுநிலம்

ஆய்வுப் பகுதியில் உள்ள நிலப்பரப்பு அலகுகளின் கடைசி வகை "வேஸ்ட்லேண்ட்" ஆகும், இது பாதுகாப்பு நடவடிக்கைகளுக்குப் பிறகும் சாகுபடிக்கு பயன்படுத்த முடியாத நிலப் பொட்டலங்களைக் குறிக்கிறது - ஸ்க்ரப் உள்ள நிலம், புதர் இல்லாத நிலம்.

விவசாயப் பகுதிக்கு அடுத்தபடியாக, ஸ்க்ரப் கொண்ட நிலம் போன்ற இயற்கைத் தாவரங்கள் தாங்கல் பகுதியில் முதன்மையான LULC வகையை உருவாக்குகின்றன. ஸ்க்ரப் கொண்ட நிலம் அரிதாக உள்ளது மற்றும் தாங்கல் பகுதியின் அனைத்து பகுதிகளிலும் சிதறிய திட்டுகளாக வரையறுக்கப்பட்டுள்ளது. ஸ்க்ரப்பின் இடஞ்சார்ந்த முறை இது நீர்நிலைகளுடன் நெருக்கமாக தொடர்புடையது என்று கூறுகிறது. இந்த

வகை 11.02 சதுர கிலோமீட்டர் பரப்பளவில் ஸ்க்ரப் நிலத்தை ஆக்கிரமித்துள்ளது, இது மொத்த மைய மற்றும் தாங்கல் பகுதியில் 3.42 % ஆகும்.

ஸ்க்ரப் இல்லாத நிலம், மறுபுறம் பழுப்பு முதல் வெள்ளை நிறம், நடுத்தர தொனி மற்றும் நடுத்தர அமைப்பு ஆகியவற்றைப் பயன்படுத்தி விளக்கப்படுகிறது மற்றும் பொதுவாக ஸ்க்ரப் மற்றும் தரிசு நிலத்தால் மூடப்பட்ட நிலத்தைச் சுற்றி கட்டுப்படுத்தப்படுகிறது. அவை 0.74 % தாங்கல் பகுதியில் 2.37 சதுர கிமீ பரப்பளவில் சிறிய திட்டுகளாகவும் மிகக் குறைந்த பரப்பளவாகவும் நிகழ்கின்றன.

நீர்நிலைகள்

ஆய்வுப் பகுதி முழுவதும் பரவியுள்ள ஆய்வுப் பகுதியில் பல நீரோடைகள் சிறிய மற்றும் பெரிய நீர்நிலைகள் காணப்படுகின்றன. அவை வீட்டு நீர் தேவைகள் மற்றும் கால்நடைகளுக்கு உதவுகின்றன. சில இடங்களில், அவை நீர்ப்பாசன நோக்கத்திற்காகவும் பயன்படுத்தப்படலாம் மற்றும் மிகவும் குறைவாகவே உள்ளன. சில உலர் நீரோடை படிப்புகளும் ஆய்வுப் பகுதியில் காணப்படுகின்றன. செயற்கைக்கோள் படத்தில், நீர்நிலைகள் அவற்றின் வெளிர் நீலம், சாம்பல் நீல நிறம், மென்மையான தொனி மற்றும் மென்மையான அமைப்பு ஆகியவற்றால் விளக்கப்படுகின்றன.

பெரும்பாலான நீர்நிலைகள் மண்ணின் பற்றாக்குறையால் மழைப்பொழிவுக்குப் பிறகு குறுகிய காலத்திற்கு தண்ணீரைத் தக்கவைத்துக்கொள்கின்றன, எனவே விரைவில் வறண்டுவிடும். ஆறுகள், ஓடைகள் மற்றும் நீர்நிலைகளின் பரப்பளவு 35.45 சதுர கிமீ மற்றும் 11.01% என மதிப்பிடப்பட்டுள்ளது.

சுரங்கப்பகுதி மற்றும் வனப்பகுதி

ஆய்வுப் பகுதியில் காணப்படும் சுரங்கப் பகுதி ஆய்வுப் பகுதி முழுவதும் காணப்படுகின்றன. சுரங்க வணிகத்தின் முக்கிய உள்நாட்டு வருமானம். சுரங்கத்தின் பரப்பளவு 7.28 சதுர கிமீ 2.26% என மதிப்பிடப்பட்டுள்ளது.

அட்டவணைஎண். 3.14: சதவீதத்தில் ஆய்வுப் பகுதியின் முக்கிய நிலபயன்பாட்டு அலகுகள்

வ. எண்	முதல் நிலை வகைப்பாடு	பரப்பு (sq.km)	சதவீதம் (%)	இரண்டாம் நிலை வகைப்பாடு	பரப்பு (sq.km)	சதவீதம் (%)
1	கட்டிடம் அல்லது வசிப்பிடம்	17.23	5.35	குடியிருப்பு	16.94	5.26
				வணிகம் / தொழில்	0.29	0.09
2	வேளாண்மை	247.3	76.80	பயிர் / தரிசு நிலம்	247.3	76.80
3	நீர்நிலைகள்	35.96	11.17	நீர்த்தேக்கம்/ஏரி/குளம்	35.45	11.01
				ஆறு/நீரோடை	0.51	0.16
4	தரிசு நிலம்	13.39	4.16	ஓபன் விதெளட்ஸ்க்ராப்	2.37	0.74
				ஓபன்வித் ஸ்க்ராப்	11.02	3.42
5	சுரங்கம்	7.28	2.26	சுரங்கம்	7.28	2.26
6	காடுகள்	0.85	0.26	காடுகள்	0.85	0.26
மொத்தம்		**322**	**100**		**322**	**100**

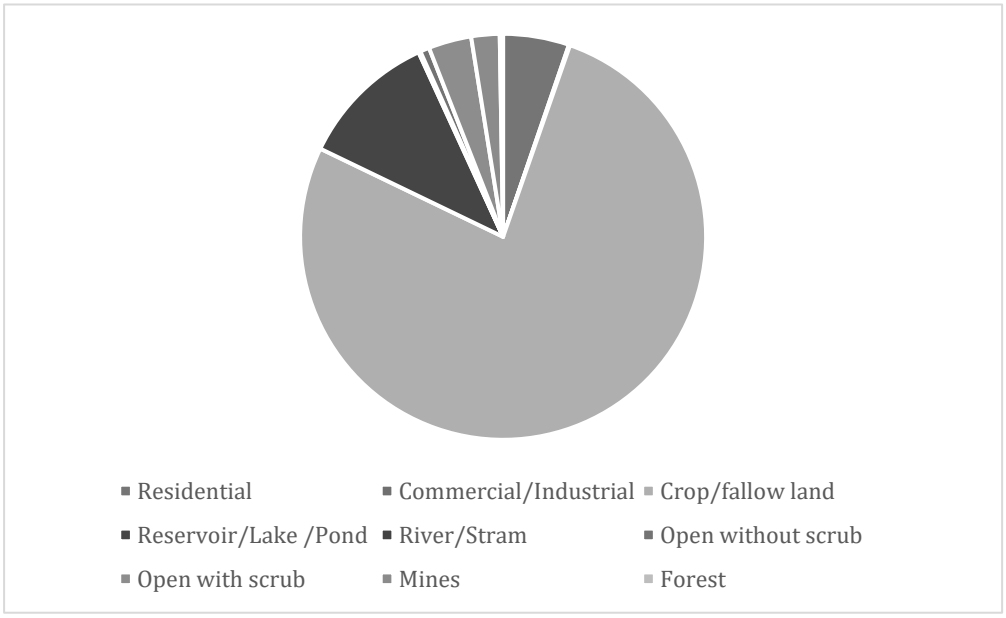

3.3.8. சமூக பொருளாதார சூழல்

ஆய்வுப் பகுதியின் சமூக-பொருளாதார சூழல் முதன்மை தளங்களை தள வருகைகள் மற்றும் மாதிரி ஆய்வுகள் மூலம் ஆய்வு செய்யப்படுகிறது. 2011 மக்கள் தொகை கணக்கெடுப்பில் இருந்து பெறப்பட்ட இரண்டாம் நிலை தரவுகளும் பயன்படுத்தப்படுகின்றன. பின்வரும் தரவு பகுதி இரண்டாம் தரவிலிருந்து சேகரிக்கப்பட்டது:

• மக்கள்தொகை முறை.

• சுகாதார முறை

• தொழில் கட்டமைப்பு.

• வசதிகள் உள்ளன

கிராமங்களின் விவரங்கள்

ஆய்வுப் பகுதியில் அமைந்துள்ள கிராமங்களின் விவரம் கீழே படம் 3.18 இல் கொடுக்கப்பட்டுள்ளது.

படம் 3.18 ஆய்வுப் பகுதியின் கிராம வரை படம்

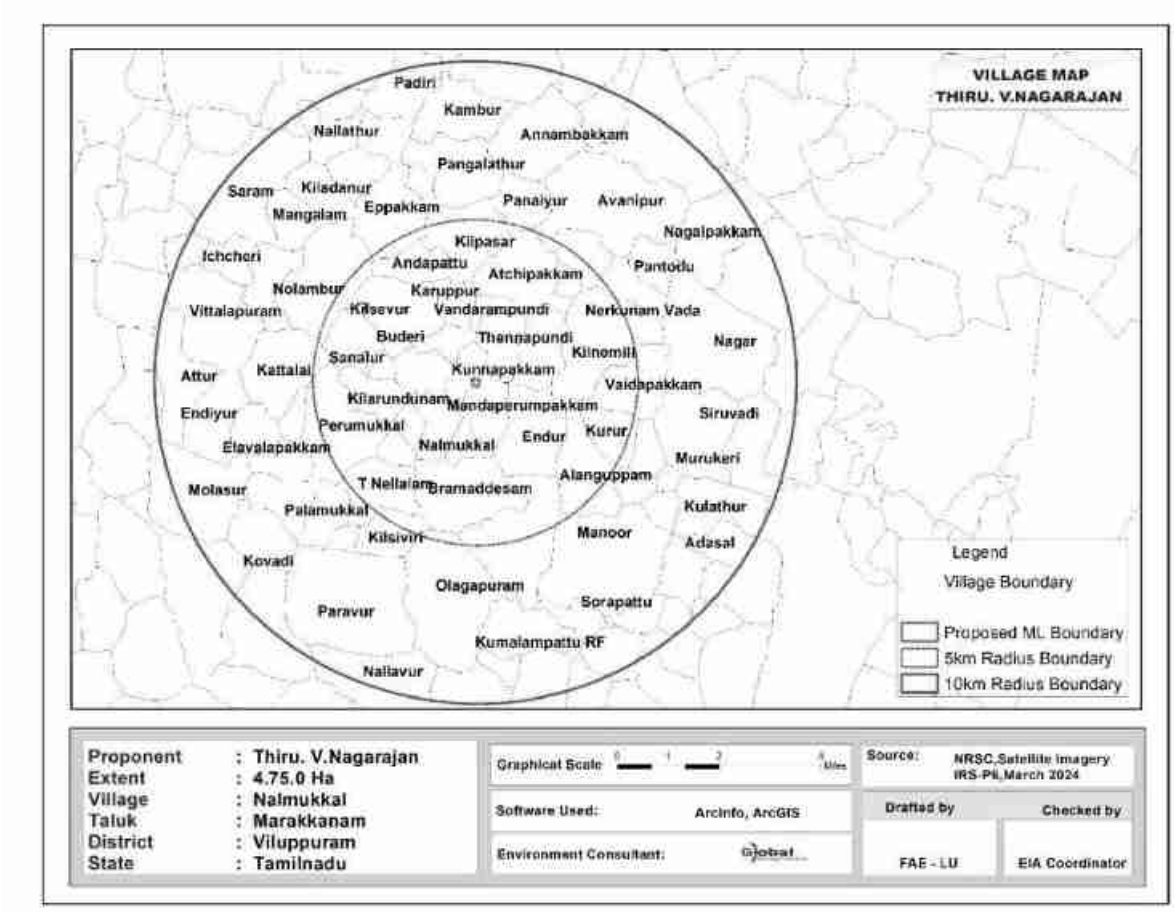

கிராமங்களின் விவரங்கள்

இத்திட்டம் விழுப்புரம் மாவட்டம் மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் அமைந்துள்ளது. மொத்த மக்கள்தொகை 106478, இதில் 53580 ஆண்கள் மற்றும் 52898 பெண்கள் உள்ளனர். ஆய்வுப் பகுதியில் 36 கிராமப்புற கிராமங்களும் ஒருநகர்ப்புறமும் உள்ளன. கிராமங்களின் பட்டியல் கீழேகொடுக்கப்பட்டுள்ளது.

அட்டவணை 3.15 ஆய்வுபகுதியில் உள்ள கிராம விவரங்கள்

வ.எண்.	கிராமம் /நகரம் பெயர்	சுற்றளவு	வட்டம்	மாவட்டம்
1	கில்பசார்	1-5km	திண்டிவனம்	விழுப்புரம்
2	அச்சிப்பாக்கம்			
3	சேந்தமங்கலம்			
4	அண்டபாட்டு			
5	கீழ்சேவூர்			
6	கருப்பூர்			
7	கீழ்மண்ணூர்			
8	கில்னெமிலி			
9	புடேரி			
10	தென்னம்பூண்டி			
11	குன்னப்பாக்கம்			
12	செனலூர்			
13	பெருமுக்கல்			
14	கிளாருங்குணம்			
15	மண்டபப்பெரும்பாக்கம்		மரக்காணம்	
16	தாங்கு			
17	குரூர்			
18	ஆலங்குப்பம்			
19	அழகப்பாக்கம்			
20	பிரமதேசம்			
21	ஓங்கூர்	6-10km	திண்டிவனம்	
22	ஒலக்கூர் கீழ்பாடி			
23	பாதிரி			
24	கம்பூர்			
25	கலவோய் வட			
26	அன்னம்பாக்கம்			
27	கடவம்பாக்கம்			
28	கடூர் எஸ்			
29	நல்லாத்தூர்			
30	நாங்குணம்			
31	சாரம்			
32	பள்ளிப்பாக்கம்			
33	ஆவணிபூர்			
34	கிலாதனூர்			
35	எப்பாக்கம்			
36	பனையூர்			
37	நாகல்பாக்கம்			
38	நொளம்பூர்			

39	இச்சேரி			
40	விட்டலாபுரம்			
41	நரமகனி			
42	ஆத்தூர்			
43	கட்டளை			
44	எண்டியூர்			
45	ஜானகிப்பேட்டை			
46	குருவம்மாபேட்டை			
47	எலவளப்பாக்கம்			
48	மொளசூர்			
49	நெற்குணம் அப்புறம்			
50	கோவடி			
51	ஓமந்தூர்			
52	நாகல்பாக்கம்			
53	ராயநல்லூர்			
54	நல்லூர்			
55	நகர்			
56	நேர்குணம் வடை			
57	அசப்பூர்			
58	குளப்பாக்கம் வட			
59	கொடிப்பாக்கம் வடை			
60	ஆலத்தூர்			
61	சொக்கந்தாங்கல்			
62	அரியந்தாங்கல்			
63	வேப்பேரி			
64	டி நெல்லாலம்		மரக்காணம்	விழுப்புரம்
65	முருக்கேரி			
66	சிங்கானந்தை			
67	வன்னிபர்			
68	பாலமுக்கல்			
69	குளத்தூர்			
70	சட்டமங்கலம்			
71	கில்சிவிரி			
72	மானூர்			
73	அடசல்			
74	ஆடவல்லிக்கூட்டம்			
75	ஓமிப்பர்			
76	சோரப்பட்டு			
77	ஒலகபுரம்		வானூர்	
78	பேராவூர்			
79	தலைகாணிக்குப்பம்			
80	குமலம்பட்டு ஆர்.எஃப்			

அட்டவணை 3.16 ஆய்வுப் பகுதியின் மக்கள்தொகை விவரம்		
விவரங்கள்	**மக்கள்தொகை**	**சதவீதம் (%)**
A. பாலினத்தின் அடிப்படையில் மக்கள்தொகை பிரிப்பு		
ஆண்மக்கள்தொகை	53580	50
பெண்மக்கள்தொகை	52898	50
மொத்தம்	**106478**	**100**
B. சாதியால்மக்கள் தொகை பிரிப்பு		
பட்டியல்சாதி	43384	40
பட்டியல்பழங்குடியினர்	1861	2
மற்றவர்கள்	61233	58
மொத்தம்	**106478**	**100**
C. எழுத்தறிவு நிலை		
கல்வியறிவு பெற்ற ஆண்மக்கள் தொகை	37714	35
கல்வியறிவு பெற்ற பெண்மக்கள் தொகை	28514	27
படிக்காத ஆண்	15866	15
படிக்காத பெண்	24384	23
மொத்தம்	**106478**	**100**
D. தொழில்அமைப்பு		
முக்கிய தொழிலாளர்கள்	37737	-
விளிம்புநிலை தொழிலாளர்கள்	17377	-
மொத்த தொழிலாளர்கள்	55114	52
மொத்த தொழிலாளர் அல்லாதவர்கள்	51364	48
மொத்தம்	**106478**	**100**

ஆண் மற்றும் பெண் மக்கள்தொகை விகிதம் ஏறக்குறைய சமமாக இருப்பதை மேலே உள்ள அட்டவணை காட்டுகிறது. மொத்த மக்கள் தொகையில் 2 % பட்டியல் பழங்குடியினரும், 40 % பட்டியல் சாதியினரும், மீதமுள்ள 58 % மக்கள் பிற சாதிகளைச் சேர்ந்தவர்கள். மொத்த மக்கள் தொகையில் 62% மக்கள் கல்வியறிவு பெற்றவர்கள். மொத்த மக்கள் தொகையில், 35% கல்வியறிவு பெற்ற ஆண்கள் மற்றும் 27% பெண்கள் கல்வியறிவு பெற்றுள்ளனர். பெண் கல்வியறிவு பெற்றவர்களை விட ஆண் கல்வியறிவு அதிகம் என்பதை இது காட்டுகிறது. முடிவுகள் கீழே உள்ள புள்ளிவிவரங்களில் திட்டமிடப்பட்டுள்ளன.

படம் 3.19 பாலின வாரியான மக்கள் தொகை பரவல்

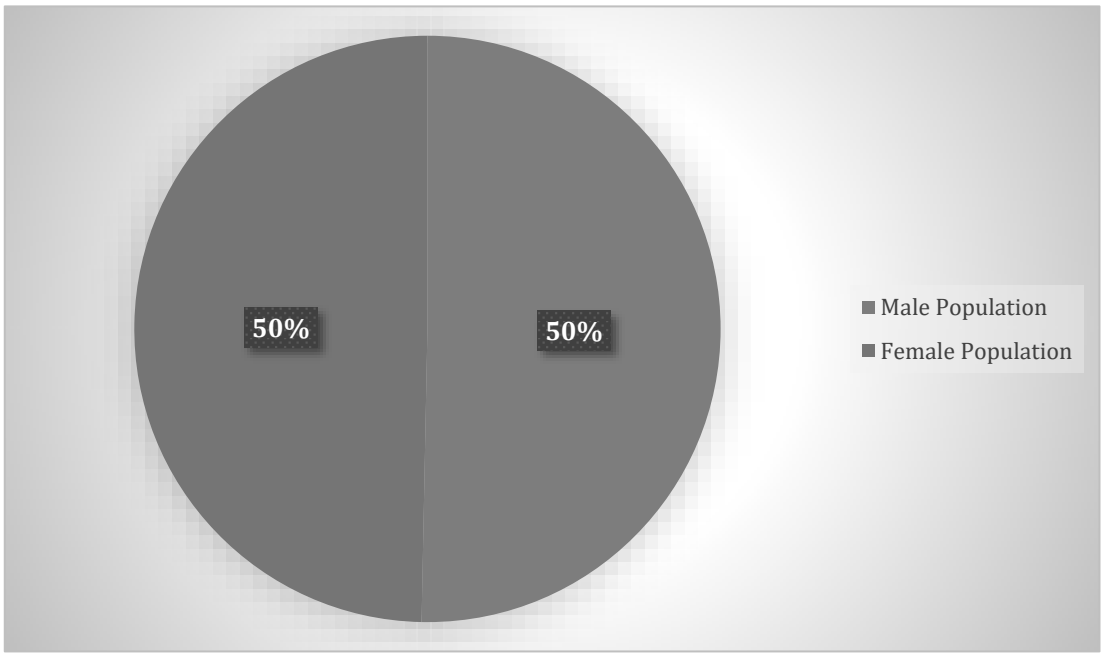

படம் 3.20 பாலின வாரியான எழுத்தறிவு

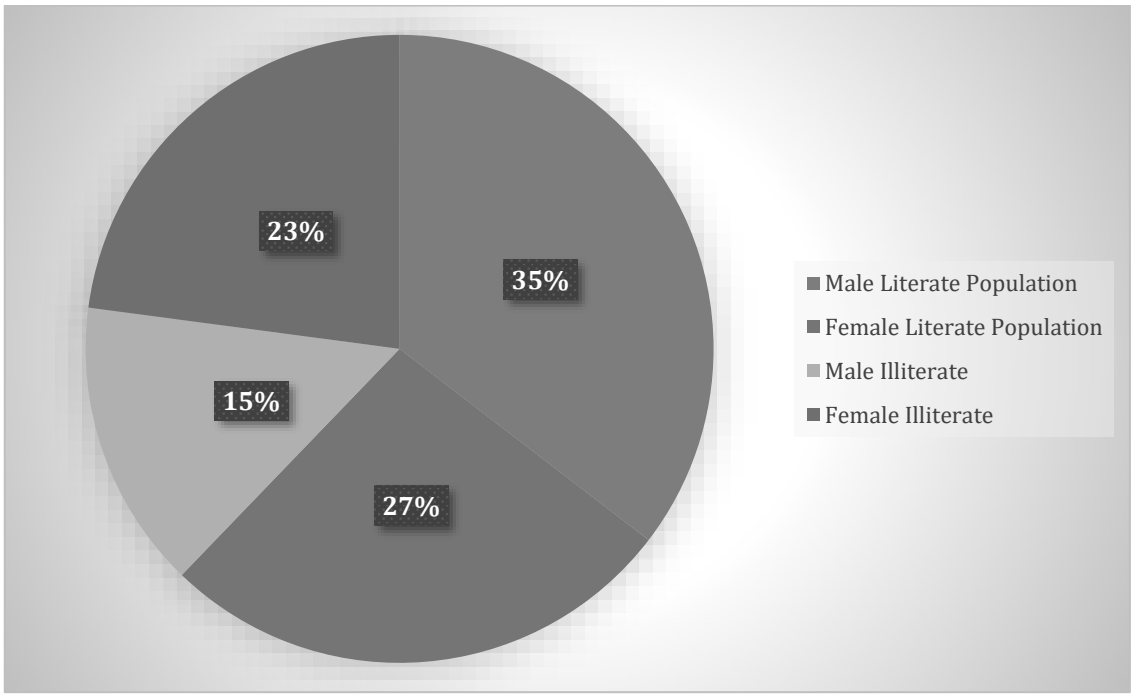

படம் 3.21 இடையக மண்டலத்திற்குள் தொழில் கட்டமைப்பு

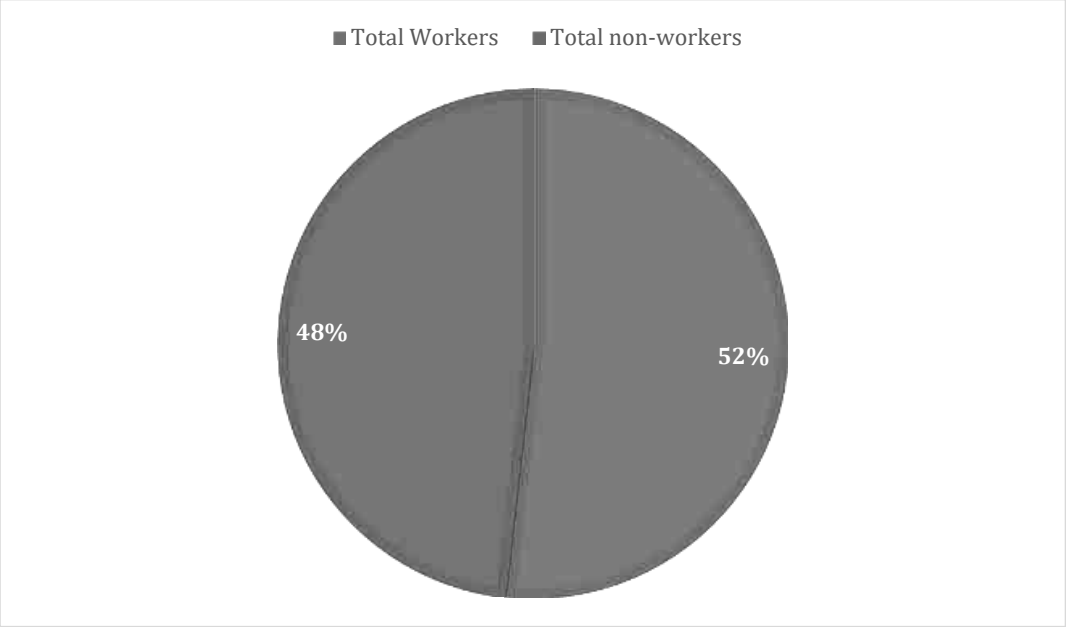

ஆய்வு பகுதியில் கல்வி உள்கட்டமைப்பு வசதிகள்

அட்டவணை 3.17 கல்வி உள் கட்டமைப்பு		
வ.எண்	**விவரங்கள்**	**கிராமத்தில் கிடைக்கும் (எண்கள்)**
1	அரசு ஆரம்ப பள்ளி	மரக்காணம் -30
2	அரசு நடுநிலைப் பள்ளி	26
3	அரசுஉயர்நிலைபள்ளி	18
4	அரசு மேல் நிலைப் பள்ளி	15
5	அரசு கலை மற்றும் அறிவியல் பட்டயக் கல்லூரி	39
6	அரசு பொறியியல் கல்லூரி	0
7	அரசு மருத்துவக் கல்லூரி	0
8	அரசு மேலாண்மை நிறுவனம்	0
9	அரசு பாலிடெக்னிக்	0
10	அரசு தொழிற் பயிற்சி பள்ளி /ஐ.டி.ஐ	0

ஆய்வுப் பகுதியில், இந்த 26 நகர்ப்புறங்களில் மொத்தம் 30 தொடக்கப் பள்ளிகள் இயங்கி வருகின்றன. அவற்றில் 80 கிராமங்களில் 15 தொடக்கப் பள்ளிகளும், 27 கிராமங்களில் 10 தொடக்கப் பள்ளிகளும், 23 கிராமங்களில் 12க்கும் மேற்பட்ட தொடக்கப் பள்ளிகளும் உள்ளன.

சுகாதாரம்

திட்ட பகுதியில் பின்வரும் உள்கட்டமைப்பு வசதிகள்உள்ளன.

அட்டவணை 3.18 மருத்துவ உள்கட்டமைப்பு		
வ.எண்	**விவரங்கள்**	**கிராமத்தில் கிடைக்கும் (எண்கள்)**
1	சமூக சுகாதாரமையம்	10
2	ஆரம்ப சுகாதாரநிலையம்	6
3	ஆரம்ப சுகாதார துணைமையம்	25
4	மகப்பேறு மற்றும் குழந்தைகள் நலமையம்	16
5	டிபி கிளினிக்	10
6	அலோபதி மருத்துவமனை	0

பிற உள்கட்டமைப்பு

பிற உள்கட்டமைப்பு வசதிகள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 3.19 மற்ற உள் கட்டமைப்பு		
வ.எண்	**விவரங்கள்**	**கிராமத்தில் கிடைக்கும் (எண்கள்)**
1	நீர் சுத்திகரிக்கப்பட்ட குழாய்	45
2	மூடப்பட்டிருக்கும் கிணறு	15
3	கைஇறைப்பான்	18
4	குழாய்கிணறுகள் / ஆழ்துளைகிணறு	16
5	தபால் அலுவலகம்	9
6	பொது பேருந்து சேவைகள்	30
7	வங்கி	16
8	கூட்டுறவுவங்கி	24

மாதிரி ஆய்வு

ஆய்வுப் பகுதியில் உள்ள நல்முக்கல், சீனலூர், குன்னபாக்கம், ஏந்தூர், தென்னம்பூண்டி ஆகிய 5 கிராமங்களுக்கு நிபுணர் பார்வையிட்டார். அப்பகுதியில் நிலவும் சமூக மற்றும் பொருளாதார நிலைமைகள் குறித்து ஆய்வு செய்தற்காக அருகில் உள்ள பகுதி மக்களுடன் கலந்துரையாடல் நடத்தப்பட்டது. நிபுணர் அருகிலுள்ள மருத்துவமனைகள், ஆரம்ப சுகாதார நிலையங்கள் மற்றும் நல்முக்கல் பார்வையிட்டார். பின்வரும் கண்காணிப்புகள் குறிப்பு செய்யப்பட்டன.

பல கிராமங்களில் ஆரம்பப் பள்ளிகள் உள்ளன. மருத்துவமனை வசதிகளுக்கு, அப்பகுதி மக்கள் குத்தகை பகுதியில் இருந்து 820 மீட்டர் தொலைவில் உள்ள நல்முக்கலில் உள்ள மருத்துவமனைக்கு செல்ல வேண்டும். மேல்நிலை மற்றும் மேல்நிலைப் பள்ளிகளைக் கொண்ட பெரிய பள்ளிகள் நல்முக்கலில் அமைந்துள்ளன. இப்பகுதியில் அமைந்துள்ள

பெரிய நல்முக்கல் ஒன்றியம் விழுப்புரம் ஆகும். பெட்ரோல் பம்பு நிலையங்கள், ஏடிஎம் வசதி போன்ற வசதிகள் நல்முக்கலில் உள்ளது.

3.3.9. ஆய்வுப் பகுதியின் ஹைட்ரோ ஜியாலஜி

முன்மொழியப்பட்ட இடத்தின் தென்கிழக்கு திசையில் 10.9 கி.மீ தொலைவில் வடபெண்ணையாறு இருப்பதால், ஆய்வுப் பகுதியின் நீரியல் மற்றும் நீரியல் முறை செயற்கைக்கோள் படங்களைப் பயன்படுத்தி விரிவாக ஆய்வு செய்யப்படுகிறது

ஹைட்ரோ ஜியாலஜிக்கல் ஆய்வு

சுற்றியுள்ள முன்மொழியப்பட்ட சுரங்க குத்தகை பகுதியின் நீர்நிலை நிலையை மதிப்பிடுவதற்கு. தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் இந்த ஆய்வுப் பகுதி அமைந்துள்ளது, சுற்றியுள்ள உத்தேச சுரங்க குத்தகைப் பகுதியின் பொதுவான நீர்வளவியல் நிலைமைகளின் தன்மையைப் புரிந்து கொள்ள கருதப்படுகிறது.

படம் 3. 22 நீரோடை வடிவம் வரைபடத்தின் 10 கிலோ மீட்டர் சுற்றளவு

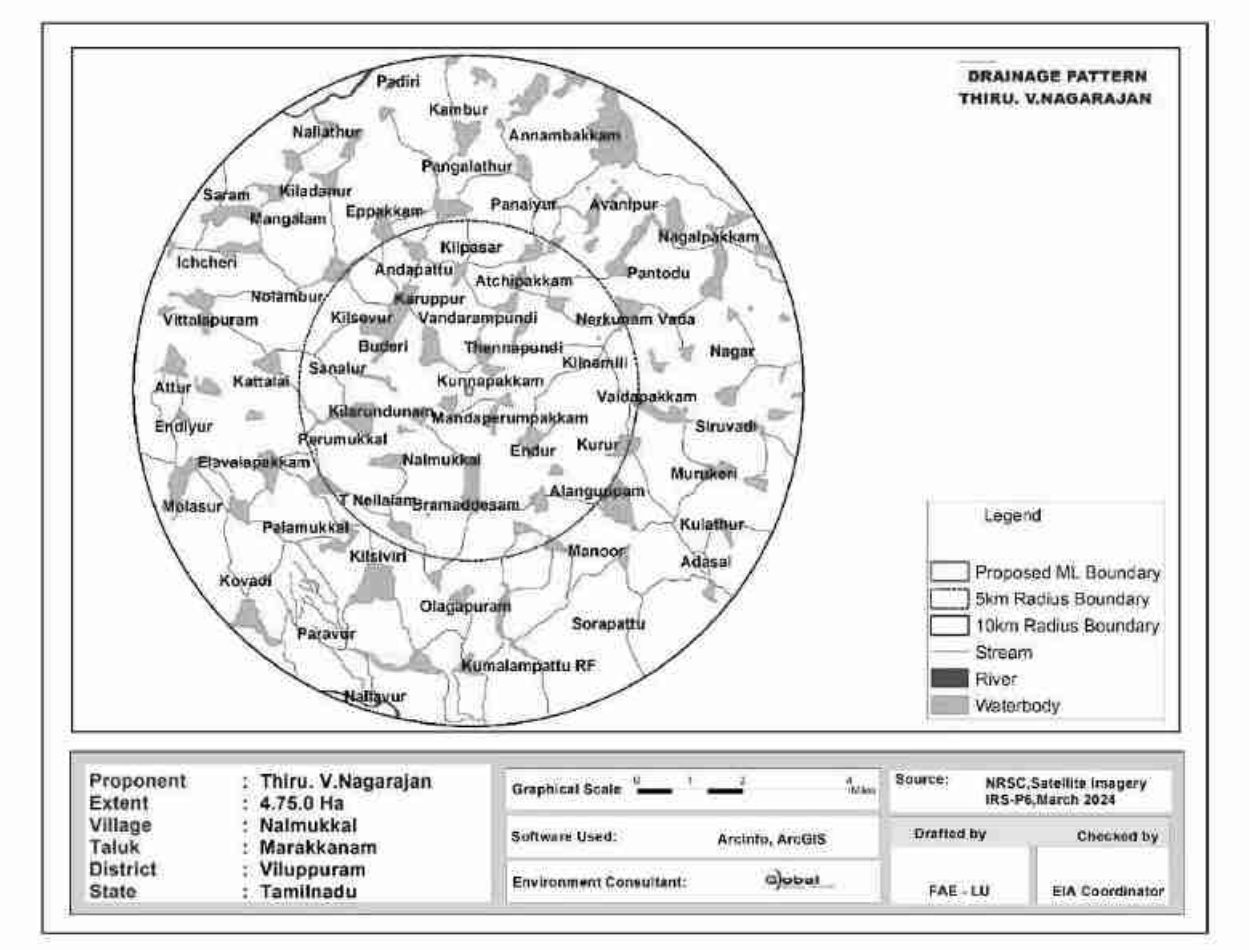

பிசியோ கிராபி மற்றும் வடிகால்:

இயற்பியல்: குவாரி குத்தகைக்கு விண்ணப்பித்த பகுதி, சாதாரண கற்களால் மூடப்பட்ட வெற்று நிலப்பரப்பைக் காட்டுகிறது. சார்னோகைட் உருவாக்கம் மேற்பரப்பிலிருந்து தெளிவாகத் தெரியும் மற்றும் பகுதியின் தென்கிழக்கு பகுதியை நோக்கி மென்மையாக உள்ளது, இப்பகுதியின் உயரம் MSL இலிருந்து 90 மீ (அதிகபட்சம்) மேலே உள்ளது.

வடிகால்: வடிகால் முறை ஆய்வு, சுமார் 1 கிமீ சுற்றளவு கொண்ட உத்தேச சுரங்க குத்தகைப் பகுதியில் இருந்து மற்றும் படம் 3.20 இல் 10 கிமீ ஆய்வு காணப்பட்டது. முன்மொழியப்பட்ட இடத்தின் தென்கிழக்கில் திசையில் 10.9 கி.மீ தொலைவில் வடபெண்ணையாறு அமைந்துள்ளது.

புவியியல், புவிபுறதோற்றம் மற்றும் மண்

புவியியல்:

மைய மற்றும் 10 கிமீ இடையக மண்டல புவியியல் அம்சங்கள் (படம் 3.21) விழுப்புரம் மாவட்டம் பெரும்பாலும் தெற்கு கிரானுலைட் டெரெய்ன் சூப்பர் குரூப் (SGT) இன் லித்தாலஜிகளால் அடிக்கோடிட்டுள்ளதைக் காட்டுகிறது. கோண்டலைட் குழுவின் சுண்ணாம்புக் கல்லுடன் கூடிய கால்க் கிரானுலைட் முகையூருக்கு வடக்கே உள்ளது. Charnockite குழுவில் Charnockite, banded magnetite quartzite மற்றும் pyrixene granulite போன்ற 3 லித்தாலஜிகள் உள்ளன. சார்னோக்கைட் வளட்டிக்கு வடக்கே காணபடுகிறது மற்றும் விக்கிரவாண்டி முதல் ஒல்லக்கூர் வரை பெரிய பகுதியை உள்ளடக்கியது. பைராக்ஸீன் கிரானுலைட்டின் பேண்ட் பெரும்பாலும் வளட்டிக்கு அருகிலுள்ள மாவட்டத்தின் NW பகுதிகளிலும், ஒதியத்தூருக்கு மேற்கே சில திட்டுகள் ஏற்படுகின்றன. மிக்மாடைட் குழுவில் பயோடைட் க்னீஸ் உள்ளது, இது மாவட்டத்தின் மத்திய மற்றும் வடகிழக்கு பகுதிகளான முத்தூர் மற்றும் முகையூர் மற்றும் வளட்டி மற்றும் அதைச் சுற்றியுள்ள பகுதிகளில் பெரிய பரப்பளவைக் கொண்டுள்ளது. விக்கிரவாண்டியின் கிழக்கில் லீனியர் பேண்டாக கிரே ஹார்ன்ப்ளெண்டே பயோடைட் க்னீஸ் காணபடுகிறது. முகையூர் முதல் செஞ்சிக்கு வடக்கே மாவட்டத்தின் பெரிய பகுதியில் ஹார்ன்ப்ளென்ட் பயோடைட் க்னீஸ் காணபடுகிறது. ஒலக்கூரின் தெற்கிலும். இளஞ்சிவப்பு மிக்மாடைட்டின் பேண்ட் செஞ்சியின் NE மற்றும் வாலட்டியின் NW இல் காணபடுகின்றன. வாலட்டிக்கு மேற்கில் உள்ள மிக்மாடைட் குழுமத்தின் பயோடைட் க்னீஸில் உள்ள க்ளோஸ்பெட் கிரானைட் வயதுடைய ஆர்க்கியன் முதல் பேலியோபுரோடெரோசோயிக் வரை. ப்ரோடெரோசோயிக் எபிடோட் ஹார்ன்ப்ளெண்டே க்னீஸ் செஞ்சி மற்றும் அதைச் சுற்றியுள்ள பகுதிகளில் வெட்டுதல் நடவடிக்கையுடன் ஏற்படுகிறது. டோலரைட் டைக்குகள் போன்ற வயதுடைய அடிப்படை ஊடுருவும் மெசொப்ரோடெரோசோயிக்

தெற்கு கிரானுலைட் நிலப்பரப்பின் பாறைகளுக்குள் ஊடுருவி, இந்த டைக்குகள் NW-SE லிருந்து E-W திசையில் உள்ளன.

கார்போனிஃபெரஸ்-ஆரம்பகால பிரீமியன், தல்சீர் உருவாக்கத்தின் பாறாங்கல் கூட்டமைப்பு, ஒலக்கூர் மற்றும் ஓங்கூர் அருகே மாவட்டத்தின் வடக்குப் பகுதியில் உள்ள நேரியல் பெல்ட்டில் நிகழ்கிறது. பிற்பகுதியில் கிரெட்டேசியஸ் காலத்தில் பாண்டிச்சேரி குழு உள்ளது, இது சேண்ட் ஸ்டோன்-ஷேல் வரிசையைக் கொண்டுள்ளது மற்றும் வானூர் மற்றும் நேசல் என பிரிக்கப்பட்டுள்ளது. பாண்டிச்சேரி குழுவைக் கொண்டுள்ளது மற்றும் இது கராசூர் மற்றும் மணவெளி வடிவங்களாகப் பிரிக்கப்பட்டுள்ளது, இதில் சுண்ணாம்பு மற்றும் களிமண் போன்ற கற்கள் உள்ளன மற்றும் வானூரின் கிழக்கில் உள்ளன. மியோசீன்-பிலியோசீன் காலமானது தடிமனான வண்டல் வரிசையின் படிவுகளால் குறிக்கப்படுகிறது மற்றும் பனம்பாறை வகை மற்றும் கடலூர் வகை என வகைப்படுத்தப்பட்டுள்ளது மற்றும் சேண்ட் ஸ்டோன், கோங்க்லமெரட் போன்ற கற்கள் உள்ளன.

படம் 3. 23 புவியியல்வரை படத்தின் 10 கிலோ மீட்டர் சுற்றளவு

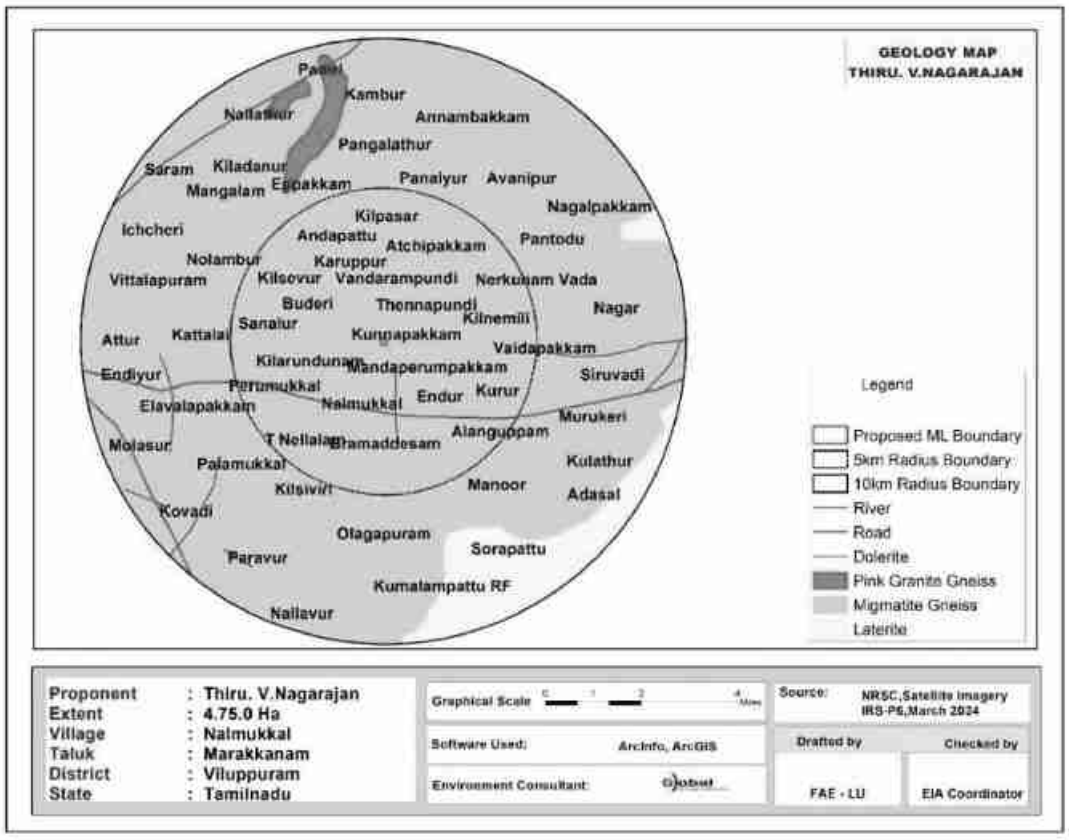

புவி புறதோற்றம்:

கோர் மற்றும் 10 கிமீ இடையக மண்டல புவியியல் அம்சங்கள் (படம் 3.24) பெடிமென்ட் பெடிப்ளெய்ன் காம்ப்ளக்ஸ், வெள்ள சமவெளி, டெல்டா சமவெளி மற்றும் தாழ்வான மற்றும் மிதமாக மலைகள் மற்றும் பள்ளத்தாக்குகள் ஆகியவற்றைக் காட்டுகிறது.

செயற்கைக்கோள் படங்களின் விளக்கம் மூலம் மாவட்டத்தில் அடையாளம் காணப்பட்ட முக்கிய புவியியல் அலகுகள் 1) கட்டமைப்பு மலைகள், 2) பசாடா மண்டலம், 3) பள்ளத்தாக்கு, 4) பெடிமென்ட்ஸ், 5) ஆழமற்ற பெடிமென்ட்கள் (6) ஆழமான பெடிமென்ட்ஸ். மாவட்டத்தின் கிழக்கு மற்றும் வடகிழக்கு பகுதிகளில் பல மலைத்தொடர்கள் அமைந்துள்ளன, அதேசமயம் மாவட்டத்தின் தெற்கு, மேற்கு மற்றும் வடக்குப் பகுதிகள் சமதளமாக, ஒரு சில தனித்தனி குன்றுகளால் சூழப்பட்டுள்ளன. மாவட்டத்தில் உள்ள முக்கியமான மலைத்தொடர்கள் கருவாக்ஷி மலை. 292 மீ, அதிமா மலை. 273 மீ, கடையா மலை. 263 மீ, வெள்ளியம்பட்டு மலை. 256 மீ, பாளையம் மலை. 255 மீ, முத்தட்டூர் மலை. 200 மீ, அடங்குளம் மலை. 161 மீ, பாப்பா மலை. 304 மீ.

படம் 3. 24 ஆய்வுப்பகுதியின் 10 கிமீ சுற்றளவு புவியியல் புறத்தோற்றம் வரைபடம்

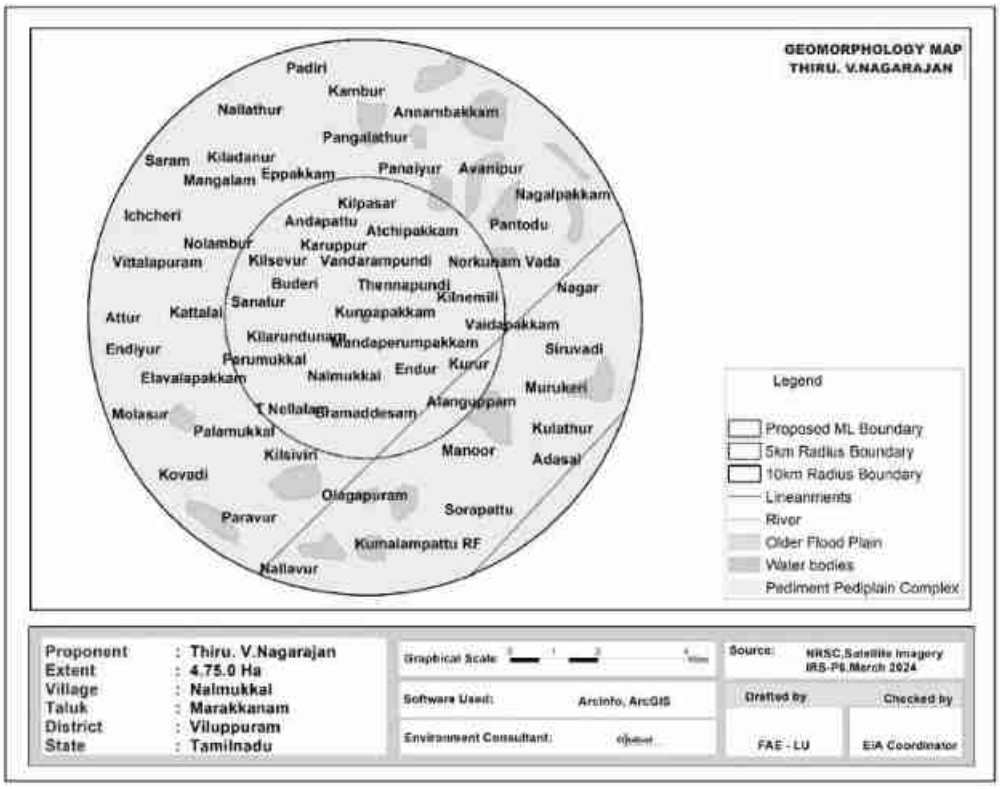

மண்:

ஆய்வுப் பகுதியில் உள்ள மண் வகைகள் பெரும்பாலும் சுண்ணாம்பு நிறைந்த கருப்பு மண், சிவப்பு களிமண் மண், களிமண் மண் மற்றும் சுண்ணாம்பு களிமண் மண் (படம் 3.25.). ஆய்வுப் பகுதியில் சுண்ணாம்பு கறுப்பு மண் (177.25 சதுர கிமீ) விநியோகிக்கப்பட்டது. ஆய்வுப் பகுதியின் வடக்கு, கிழக்கு, மேற்கு மற்றும் மத்திய பகுதியில் (108.43 சதுர கிமீ) சிவப்பு களிமண் மண் காணப்படுகிறது. ஆய்வுப் பகுதியின் வடமேற்குப் பகுதியில் (34.93 சதுர கிமீ) களிமண் மண் காணப்படுகிறது.

படம் 3.25 ஆய்வுப் பகுதியின் 10 கிமீ சுற்றளவு மண் வகை வரைபடம்

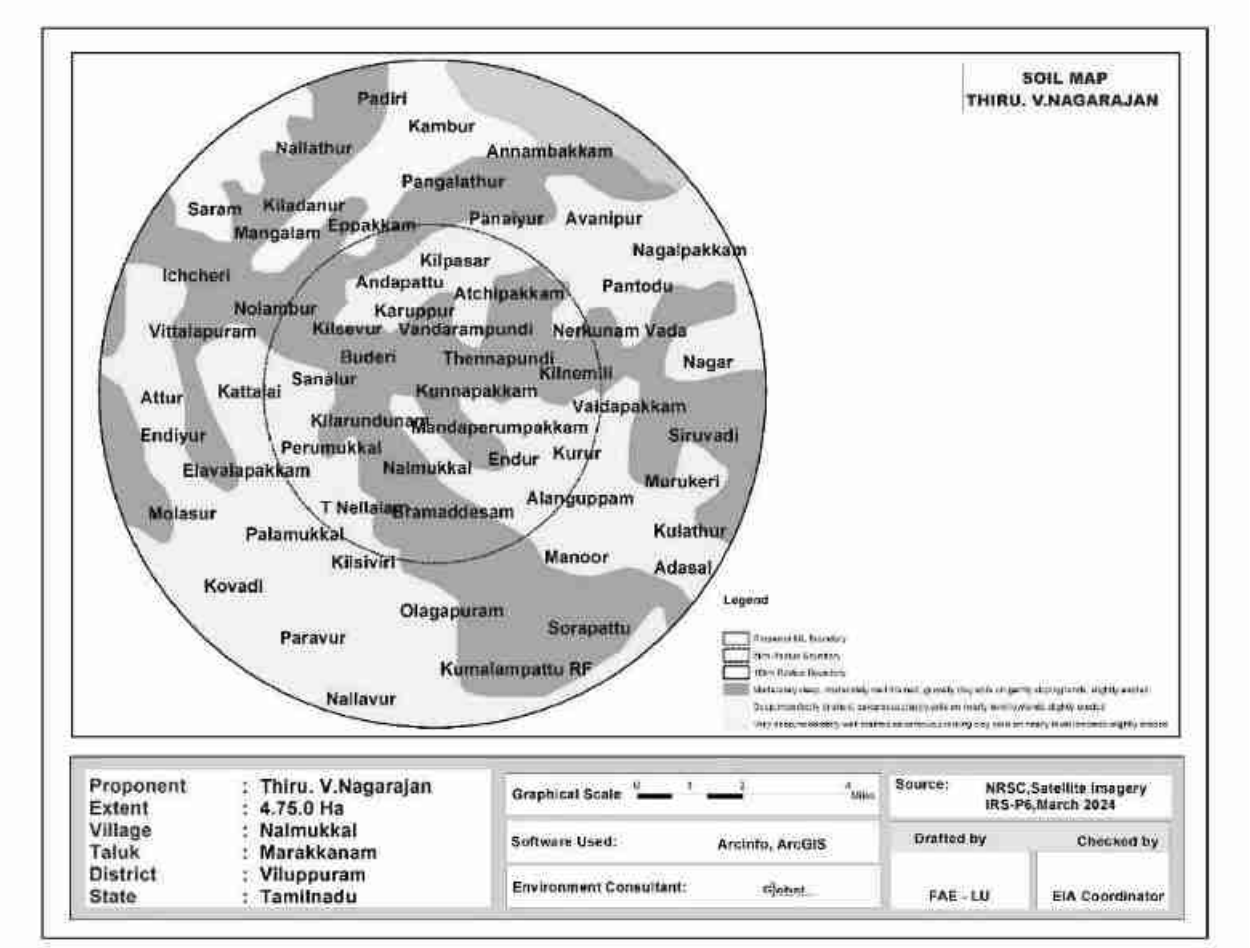

தரைமட்டத்திற்கு கீழே (BGL)

படம் 3.26 & 3.27 ஆய்வுப்பகுதியின் பருவமழை அல்லாத மற்றும் பருவமழை நீர்நிலை வரைபடத்தைக் காட்டுகிறது.

படம் 3.26 ஆய்வுப் பகுதியின் பருவமழை அல்லாத நீர் நிலை வரைபடம்

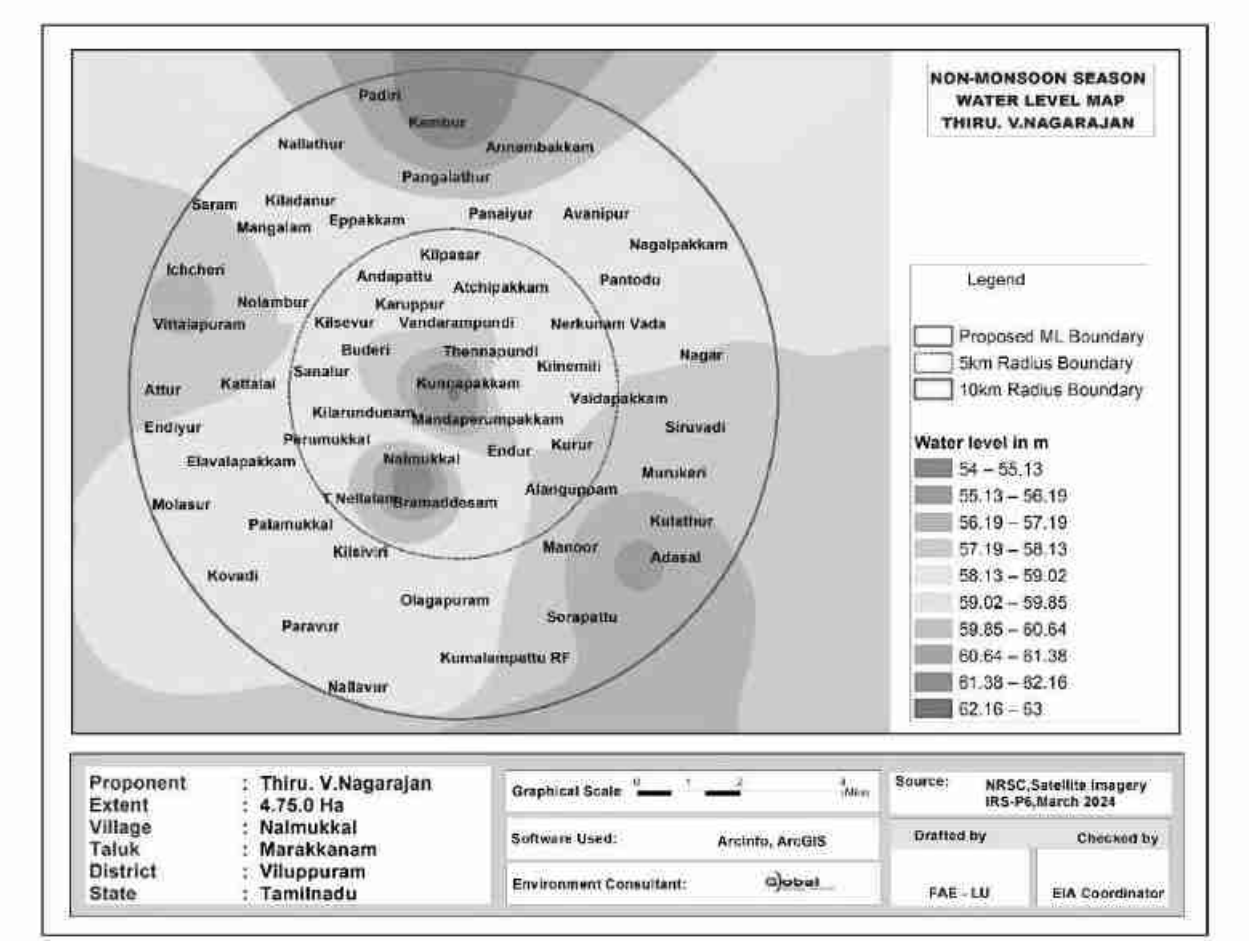

படம் 3.27 ஆய்வுப்பகுதியின்மழைக்காலநீர்நிலைவரைபடம்

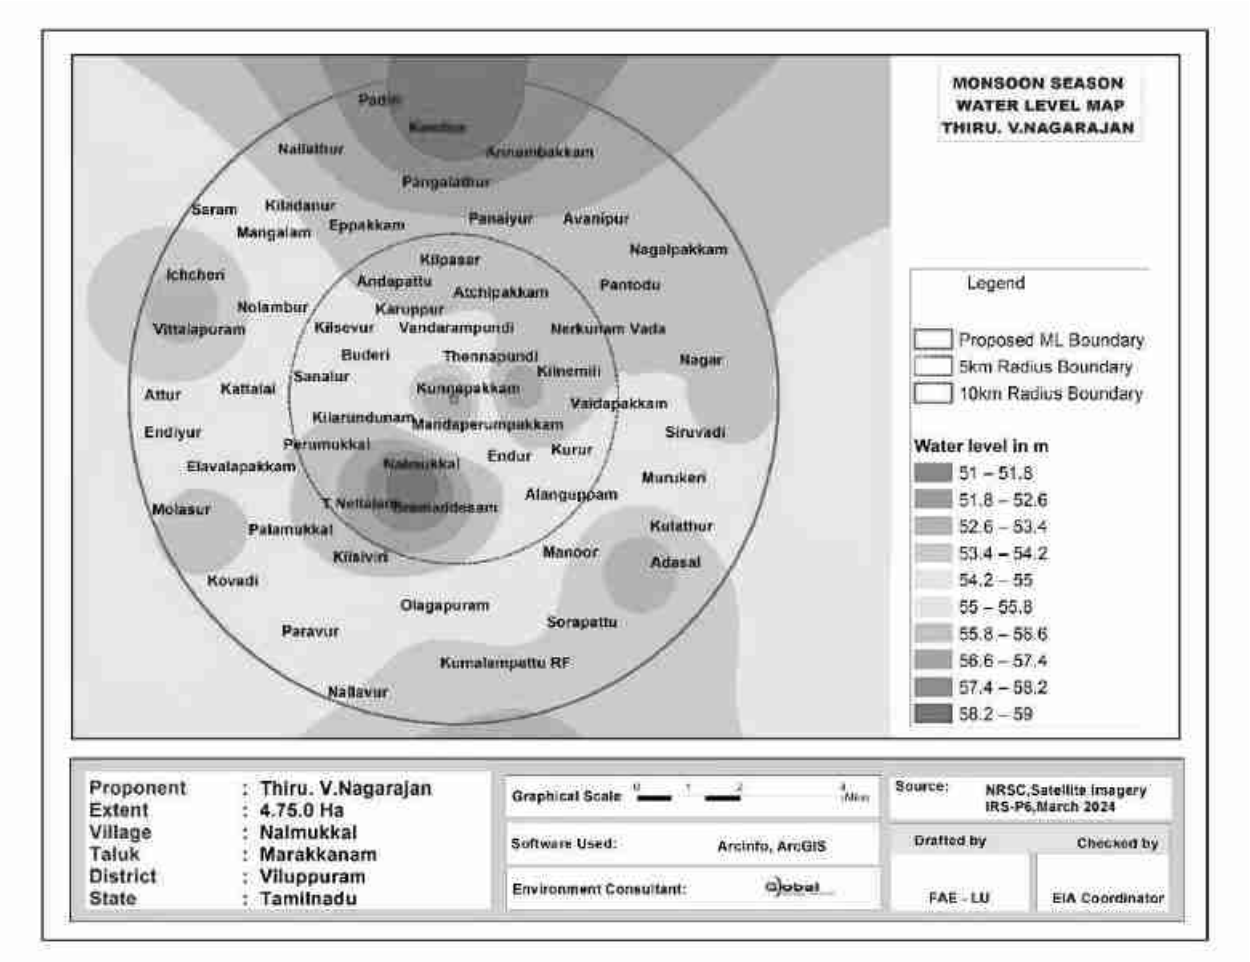

களவிசாரணை

தற்காலிக பருவகால நீரோடைகள் மையத்திலிருந்து பெரும்பாலான பகுதிகளுக்கு நீர் பாய்கிறது. இப்பகுதியில் இருந்து தென்கிழக்கில் 10.9 கி.மீ தொலைவில் வடபெண்ணையாறு உள்ளது. மழைக்காலங்களில் மட்டுமே தண்ணீர் தற்காலிகமாக காணப்படும்.

இரண்டு பருவங்களில் இந்த பிரதிநிதித்துவத்தில், மழைப்பொழிவு தாக்கம் மற்றும் அது பருவமழை காலம் வரை நீட்டிக்கப்படுவதால், பருவமழை அல்லாத பருவத்தில் நீர்மட்டம் கணிசமாக வீழ்ச்சியடைகிறது. சில கிணறுகளின் நீர்மட்டம் இரு பருவங்களிலும் ஆழம் குறைவாக இருக்கும். இந்த ஆழ்துளை கிணறுகள் அருகிலேயே நீர்நிலைகள் உள்ளன. எனவே, இந்த கிணறுகளில் மேற்பரப்பு நீர் தாக்கம் என்பதை தெளிவாக காட்டுகிறது

மழைக்காலத்தில் நிலத்தடி நீர் மட்டத்தின் ஆழம். தென்மேற்கு மற்றும் வடகிழக்கு பருவமழையின் போது அதிக மழை பெய்து வருவதால் நீர் மட்டம் அதிகரித்துள்ளது என்பது குறிப்பிடத்தக்கது. மழைக்காலத்தில் நிலத்தடி நீர் மட்டம் கணிசமாக உயர்ந்துள்ளது.

ஆய்வுப் பகுதியில், ஆழ்துளைக் கிணறுகள் மூலம் ஆழமற்ற நீர்நிலையும், குழாய் கிணறுகள் மூலம் ஆழமான நீர்நிலையும் உருவாக்கப்படுகிறது. ஆழமான மட்டங்களில் எதிர்கொள்ளப்படுகின்றன என்று ஆய்வு வெளிப்படுத்தியுள்ளது. கிணறுகளில் தண்ணீர் முக்கியமாக பருவமழைக் காலத்தில் கிடைக்கும் மற்றும் பருவமழை இல்லாத காலங்களில் நிலத்தடி நீரை கோருகிறது. ஆழ்துளை கிணறுகள் ஆழமானவை மற்றும் ஆழமான நீர் மட்டங்களில் மட்டுமே விளைச்சல் சிறப்பாக இருக்கும் என்பதை இது பிரதிபலிக்கிறது.

இப்பகுதியில் உள்ள தொட்டிகளில் சேகரிக்கப்படும் மழை நீர், மழைக்காலத்தில் நல்ல நீராதாரமாக செயல்படுகிறது. ரீசார்ஜை அதிகரிப்பதற்காக, நீர்நிலையை ரீசார்ஜ் செய்வதில் மிகவும் திறம்படச் செய்ய, ரீசார்ஜ் கிணறுகள்/ரீசார்ஜ் ஷாஃப்ட்கள் வழங்கப்படலாம்.

*****

அத்தியாயம் 4

எதிர்பார்க்கப்பட்ட சுற்றுச்சூழல் தாக்கங்கள் மற்றும் தணிப்பு நடவடிக்கைகள்

அறிமுகம்

இந்த அத்தியாயம் பல்வேறு எதிர்பார்க்கப்படும் சுற்றுச்சூழல் பாதிப்புகள் மற்றும் முன்மொழியப்பட்ட சுரங்க நடவடிக்கைகளின் தணிப்பு நடவடிக்கைகள் பற்றி விவாதிக்கிறது. முன்மொழியப்பட்ட சுரங்கத்தின் முறை திறந்தவெளி இயந்திரமயமாக்கப்பட்டது மற்றும் குவாரி செயல்பாட்டில் துளையிடுதல், வெடித்தல், தோண்டுதல், பெஞ்சுகளை உருவாக்குதல், தாதுக்களை ஏற்றுதல் மற்றும் கொண்டு செல்வது ஆகியவை அடங்கும். மேற்கூறிய நடவடிக்கைகள், பாறைகளை அகற்றுதல், அப்பகுதியின் தாவரங்கள் மற்றும் விலங்கினங்களின் இழப்பு, மேற்பரப்பு நீர் வெளியேற்றம், காற்று மற்றும் நீரின் தரத்தில் மாற்றம் போன்ற சுற்றியுள்ள சூழலைப் பாதிக்கலாம், முன்மொழியப்பட்ட செயல்பாடுகளுக்கு போதுமான நடவடிக்கைகள் எடுக்கப்படாவிட்டால், அது அப்பகுதியின் சுற்றுச்சூழல் சீர்கேட்டை ஏற்படுத்துவதோடு, சுற்றுச்சூழலின் சுற்றுச்சூழல் பாதிப்பிற்கு வழிவகுக்கும்.

முன்மொழியப்பட்ட சுரங்க குத்தகைப் பகுதியின் தற்போதைய சுற்றுச்சூழல் சூழ்நிலையைப் பராமரிக்க, சுரங்க நடவடிக்கைகளைத் தொடங்குவதற்கு முன், முன்மொழியப்பட்ட சுரங்க குத்தகைப் பகுதி மற்றும் திட்டத்தின் இடையகப் பகுதியின் தற்போதைய சூழலியல் மற்றும் சுற்றுச்சூழலை மதிப்பிடுவது கட்டாயமாகத் தேவைப்படுகிறது. முன்மொழியப்பட்ட குவாரி நடவடிக்கைகளால் கண்டறியப்படும் பல்வேறு சுற்றுச்சூழல் பாதிப்புகள் கீழே விவாதிக்கப்பட்டு அதன் அடுத்தடுத்த பத்திகள்.

- நிலச்சூழல்
- மண்சூழல்
- நீர்சூழல்
- காற்றுசூழல்
- இரைச்சல்சூழல்
- உயிரியல்சூழல்
- சமூகபொருளாதாரசூழல்

4.1 திட்ட இடம் சாத்தியமான விபத்துக்கள், திட்ட வடிவமைப்பு, திட்ட கட்டுமானம், வழக்கமான செயல்பாடுகள் இறுதி குழுமத்தின் காரணமாக ஆய்வு செய்யப்பட்ட சுற்றுச்சூழல் பாதிப்புகளின் விவரங்கள்

இது முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரி ஆகும். திரு.V.நாகராஜன் முன்மொழியப்பட்ட குவாரி ஆனது அமைத்து உள்ள இடம், தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் 4.75.0 ஹெக்டேர் பரப்பளவில் உள்ள புல எண். 34/1B1, 35/2B, 35/3 மற்றும் 35/4 ஆகும். இந்த சுரங்க முறையானது, 5 மீட்டர் பெஞ்ச் அகலம் மற்றும் உயரம் கொண்ட திறந்தவெளி இயந்திரமயமாக்கப்பட்டது. 8,89,700 கனமீட்டர் சாதாரண கல் மற்றும் 96,210 கனமீட்டர் கிராவல். 38 மீட்டர் (BGL) ஆழம் வரை 5 ஆண்டுகளுக்கு தோண்ட உத்தேசிக்கப்பட்டுள்ளது. சுரங்க குத்தகை பகுதிக்குள் ஓடை இல்லை.

குவாரி செயல்பாட்டின் காரணமாக நிலச் சுற்றுச்சூழலில் எதிர்பார்க்கப்படும் முக்கிய தாக்கம் நிலப்பரப்பில் மாற்றம், நிலம் - பயன்பாட்டு முறை மாற்றம்.

சுரங்க குத்தகை பகுதி முழுவதும் பட்டா நிலம் மொத்த பரப்பு 4.75.0 ஹெக்டேர். தோண்டப்படும் இடம் (3.86.0 ஹெக்டேர்), உள்கட்டமைப்பு (0.02.0), சாலை (0.01.0 ஹெக்டேர்) மற்றும் 0.86.0 ஹெக்டேர் பாதுகாப்பு பகுதியில் பசுமைப் வளையம் போன்ற பயனுள்ள குவாரி நடவடிக்கை மூலம் மாற்றியமைக்க முன்மொழியப்பட்டது. குவாரியின் இறுதி ஆழம் அதிகபட்சமாக 38 மீ BGL ஆழத்துடன் முன்மொழியப்பட்டது மற்றும் நிலத்தடி நீர் மட்டத்தில் குறுக்கிடாது.

4.2 எதிர்பார்க்கப்பட்ட தாக்கங்கள் மற்றும் தணிப்பு நடவடிக்கைகள்

<table>
<tr><th>அம்சம்</th><th>தாக்கம்</th><th>தணிப்பு நடவடிக்கைகள்</th></tr>
<tr><td>நிலப்பரப்பு</td><td>சாதாரண கற்களால் மூடப்பட்ட நிலப்பரப்பை இப்பகுதி வெளிப்படுத்துகிறது. குவாரிச் செயல்பாடு அப்பகுதியின் புவியியல் அமைப்பில் மாற்றத்திற்கு வழிவகுக்கும், அதாவது, சுரங்க குத்தகை பகுதியில் குவாரி நடவடிக்கை காரணமாக சுற்றுச்சூழல் மீதான பார்வை பாதிக்கப்படுகிறது. மேலும், கனரக வாகனங்கள் சுரங்க குத்தகைப் பகுதியிலும் அதைச் சுற்றியுள்ள பகுதிகளிலும் செல்வதால், SO2, NOx, PM10, PM2.5 போன்ற வாகனங்களில் இருந்து வெளியேறும் வாயுக்களால் சுற்றியுள்ள விவசாய நிலங்கள், சூழலியல் மற்றும் பல்லுயிர், மனித வாழ்விடங்கள் பாதிக்கப்படும். , தற்போதுள்ள நில பயன்பாட்டு முறை கீழே கொடுக்கப்பட்டுள்ளது.</td><td>இத்திட்டத்தால் நிலச்சூழலில் ஏற்படும் பெரும் பாதிப்பு நில பயன்பாட்டில் ஏற்படும் மாற்றமாகும். சுரங்க செயல்பாடு 38 மீ (BGL) ஆழம் வரை மேற்கொள்ளப்படும். சுரங்கக் காலத்தின் முடிவில், குவாரி எடுக்கப்பட்ட குழி மழை நீரை சேமிக்க ஒரு நீர் தேக்கமாக செயல்படும்.
குவாரி முடிவில் நிலப் பயன்பாடு பின்வருமாறு இருக்கும்.
<table>
<tr><th>நிலத்தின் பயன்</th><th>குவாரி காலத்தில் பயன்பாட்டில் உள்ள பகுதி (ஹெக்டேர்)</th></tr>
<tr><td>நீர்நிலைக்கு விடப்பட்ட பகுதி</td><td>3.86.00</td></tr>
<tr><td>பச்சைபெல்ட்</td><td>0.86.00</td></tr>
<tr><td>மீதமுள்ளபகுதி</td><td>0.03.00</td></tr>
<tr><td>மொத்தம்</td><td>4.75.0</td></tr>
</table>
சுரங்கம் மூடப்படும் நிலையில், 3.86.0 ஹெக்டேர் குத்தகைப் பகுதி மழை நீர் சேகரிப்பு குளமாக விடப்படும். 0.86.0 ஹெக்டேர் பசுமை</td></tr>
</table>

	நிலத்தின் பயன் / **தற்போதைய நில (ஹெக்டேர்)** / **குவாரி காலத்தில் பயன் பாட்டில் உள்ள பகுதி (ஹெக்டேர்)** குவாரிகுழி 0.06.50 3.86.00 உள்கட்டமைப்பு இல்லை 0.02.00 சாலைகள் இல்லை 0.01.00 பச்சைபெல்ட் இல்லை 0.86.00 பயன்படுத்தப்படாதது **4.68.50** இல்லை மொத்தம் **4.75.0**0 **4.75.0**0 சுரங்க குத்தகை பகுதியின் இறுதி குழி அளவு கீழே கொடுக்கப்பட்டுள்ளது. சுரங்க திட்டம் முடியும் போது இறுதிநிலை குழி விவரம் குழி எண் / நீளம் (மீ) / அகலம் (மீ) / ஆழம் (மீ) I 227 170 38 மீட்டர் (தரைமட்டத்திருக்கு கீழ்) – முறையாக சுரங்கம் தோண்டப்படாவிட்டால், சுரங்கப் பகுதியில் விபத்துகள் ஏற்படும்.	பட்டையுடன் உருவாக்கப்படும். சுரங்க குத்தகைப் பகுதியைச் சுற்றி பச்சை வளையம் உருவாக்கப்பட வேண்டும் மற்றும் விவரங்கள் கீழே கொடுக்கப்பட்டுள்ளன. வருடம் / மர வகை / எண்ணிக்கை / இடைவெளி / பிழைத்தல் I புங்கை, வாகை, வேம்பு, மஞ்சள் கொன்றை, நாவல் பூவரசு முதலிய 2400 3m x 3m 80% II - 3m x 3m 80% III - 3m x 3m 80% IV - 3m x 3m 80% V - 3m x 3m 80% **மொத்தம்** **2400** சுரங்க குத்தகைப் பகுதியைச் சுற்றிலும் அடர்ந்த செடிகொடிகள் இருப்பதாலும், சுரங்கப் பாதைகளைச் சுற்றி தண்ணீர் தெளிப்பதாலும், வாகனங்களில் இருந்து எழும் தூசி வெளியேற்றம் கட்டுப்படுத்தப்படும். சுரங்கக் காலத்தின் முடிவில், சுரங்கப் பகுதிக்குள் பொதுமக்கள் / கால்நடைகள் நுழைவதைத் தடுக்க சுரங்க குத்தகைப் பகுதியைச் சுற்றி வேலி அமைக்கப்படும். சாதாரண கல் 5 மீ பெஞ்ச் உயரம் மற்றும் 5 மீ அகலம் 45^0 மொத்தசாய்வு மற்றும் வழக்கமான திறந்தவெளி இயந்திரமயமாக்கப்பட்ட முறையுடன் குவாரி செய்ய முன்மொழியப்பட்டது. அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்தின்படி 7.5 மீட்டர் பாதுகாப்பு தூரம் வழங்கப்பட வேண்டும். குவாரி செயல்பாட்டின் போது எதிர்பார்க்கப்படும் அதிக சுமை இல்லை. தோண்டிய சாதாரண கல், வாங்குபவர்களுக்கு நேரடியாக டிப்பரில் ஏற்றப்படும்.
நீர்வழி	சுரங்க வடிகால் என்பது சுரங்கத்திலிருந்து வெளியேறும் மேற்பரப்பு நீர் அல்லது நிலத்தடி நீர் ஆகும். சுரங்க வடிகால் பாதகமான தாக்கங்களில் ஒன்று, அது நிலத்தடி நீரை மாசுபடுத்தும்.	அங்கீகரிக்கப்பட்ட சுரங்கத் திட்டத்தின்படி இறுதி குழி வரம்பு 38 மீ (BGL) - . நிலத்தடி நீர் மட்டம் 68 மீ. முன்மொழியப்பட்ட சுரங்கத் திட்டத்தில் 38 மீ (BGL) - பாதுகாப்பான முழு குத்தகைக் காலத்திற்கும் வேலை செய்யக்கூடிய ஆழமாக கருதப்பட்டது. எனவே குவாரி செயல்பாடு நிலத்தடி நீரை பாதிக்காது.
மண்ணின் தரம் மற்றும் விவசாயம்	பருவமழைக் காலங்களில் கனிம தோண்டுதல் காரணமாக அருகிலுள்ள நீர்நிலைகளில் மண் அரிப்பு மற்றும் வண்டல் படிவு ஏற்படும்.	38 மீ (BGL) வரை குவாரி செய்ய உத்தேசிக்கப்பட்டுள்ளது. நிலத்தடி நீர் மட்டம் 68 மீ. எனவே, சுரங்க நடவடிக்கை நிலத்தடி நீரை பாதிக்காது. மழைக்காலத்தில் மண் அரிப்பைத் தடுக்க, வண்டல் மண் பொறிகளைக் கொண்டு வடிகால் அமைக்கப்படும்.
சுற்றியுள்ள சூழலில் காட்சி தாக்கம்	குவாரி நடவடிக்கைகள் மற்றும் பாறைகளை பிரித்தெடுப்பது பொதுவாக சுற்றியுள்ள பகுதிகளில் பல சுற்றுச்சூழல் பாதிப்புகளை ஏற்படுத்துகிறது. குறிப்பாக, துளையிடுதல் அல்லது வெடிக்கச் செய்தல் போன்ற செயல்பாடுகளால் நிலப்பரப்பில் ஏற்படும் மாற்றம், சுற்றுப்புறத்தில் தாக்கத்தை உருவாக்குகிறது. இந்த விளைவுகளில், அசல் நில வடிவத்துடன் சுரங்க மேற்பரப்பின் வடிவம், அளவு அல்லது நிற மாறுபாடு புதிய நகர்ப்புற குடியிருப்புகளின் வளர்ச்சிக்கான முறையீட்டின் பெரும் இழப்பைக் குறிக்கலாம்.	புவியியல் அளவுருக்கள் மற்றும் உள்ளூர் தாவரங்கள் மற்றும் தட்பவெப்பநிலை ஆகியவற்றைக் கருத்தில் கொண்டு சுற்றாடல் சமநிலையை மீட்டெடுப்பதை நோக்கமாகக் கொண்டது. மேலும் சுரங்கத்தின் இறுதி ஆழம் 383 மீட்டர் BGL ஆகும். சுரங்கத்திற்கு பிந்தைய கட்டத்தில், குவாரி எடுக்கப்பட்ட குழி மழைநீர் சேகரிப்புக்கு பயன்படுத்தப்படும்.

4.2.1 திடக்கழிவு உற்பத்தி மற்றும் மேலாண்மை

பிளாஸ்டிக் கழிவு உற்பத்தி மிகவும் குறைவாக உள்ளது மற்றும் அது குறிப்பிட்ட குப்பைத் தொட்டியில் மூல மட்டத்திலிருந்து சேகரிக்கப்பட்டு நகராட்சி தொட்டிகள் மூலம் அகற்றப்படும்.

- திடக்கழிவு உற்பத்திகளைக் கண்டறிதல்.
- வெவ்வேறு வண்ணக் குறியீட்டுடன் சேகரிக்க குப்பைத் தொட்டிகளை வழங்குதல்.
- ஊழியர்களிடையே விழிப்புணர்வை ஏற்படுத்துதல்.
- பொதுவான சேமிப்புக் கூடங்களை உருவாக்குதல்.
- அருகிலுள்ள முனிசிபல் யார்டுகளுக்கு அப்புறப்படுத்துதல்.
- பதிவு பேணல்.
- காலாண்டுக்கு ஒருமுறை மதிப்பாய்வு செய்யவும்.

4.2.2 நீர்சூழல்

மேற்பரப்பு நீர்வளங்கள் மீதான தாக்கம்

திட்ட பகுதிக்குள் பருவகால அல்லது வற்றாத ஓடை இல்லை. இப்பகுதியின் வடிகால் அமைப்பு முதல் துணை-டென்ட்ரிடிக் ஆகும். குவாரி மேற்பரப்பு ஓடும் நீர். முன்மொழியப்பட்ட வடிகால் மூலம் அப்பகுதி வடிகால் செய்யப்பட்டு, குவாரியின் அடிப்பகுதியில் சேகரிக்கப்பட்டு, சேகரிக்கப்பட்ட நீர் அதே குவாரி செயல்பாட்டிற்கும், தோட்டம் மற்றும் தூசியை அடக்குவதற்கும் பயன்படுத்தப்படும்.

வடபெண்ணையாறு முன்மொழியப்பட்ட திட்ட பகுதியின் தென்கிழக்கில் திசையில் 10.9 கிமீ தொலைவில் அமைந்துள்ளது. நீர்மட்டம் 68மீ ஆழத்தில் காணப்படுகிறது.

இந்த நீர்நிலைகள் குத்தகை பகுதிக்கு வெளியே அமைந்திருப்பதாலும், கழிவுநீர் வெளியேற்றப்படாமலோ அல்லது சுரங்கங்களில் இருந்து சுத்திகரிக்கப்படாத நீரும் இந்த நீர்நிலைகளில் வருவதால், பெரிய பாதிப்பு இல்லை. திட்ட முன்மொழிபவர் குத்தகைக்குள் மட்டுமே சுரங்க செயல்பாட்டை கடைபிடிப்பார். மேலும் கால்வாய்க்கு அருகில் அல்லது சுரங்க குத்தகைக்கு வெளியே எந்தப் பகுதியிலும் வேறு எந்தப் பணியும் மேற்கொள்ளப்படாது.

சுரங்கங்களில் நீர்பயன் பாட்டினால் ஏற்படும் பாதிப்பு:

முன்மொழியப்பட்ட சுரங்கங்களில் நீர் முக்கியமாக, தூசியை அடக்குவதற்கும் மற்றும் தோட்டக்கலைக்கும் பயன்படுத்தப்படும். திட்டத்திற்கான மொத்த நீர் தேவை 8.0 KLD ஆகும், இது வெளி நிறுவனங்களில் இருந்து பெறப்படும். 1.0 KLD அளவுள்ள மிகக்குறைந்த கழிவுநீர் உருவாகும், அதற்காக ஒரு சாக்கடை தொட்டி அமைக்கப்படும். நீர் சமநிலை வரைபடம் கீழே கொடுக்கப்பட்டுள்ளது.

படம் 4.1 நீர் தேவை வரைபடம்

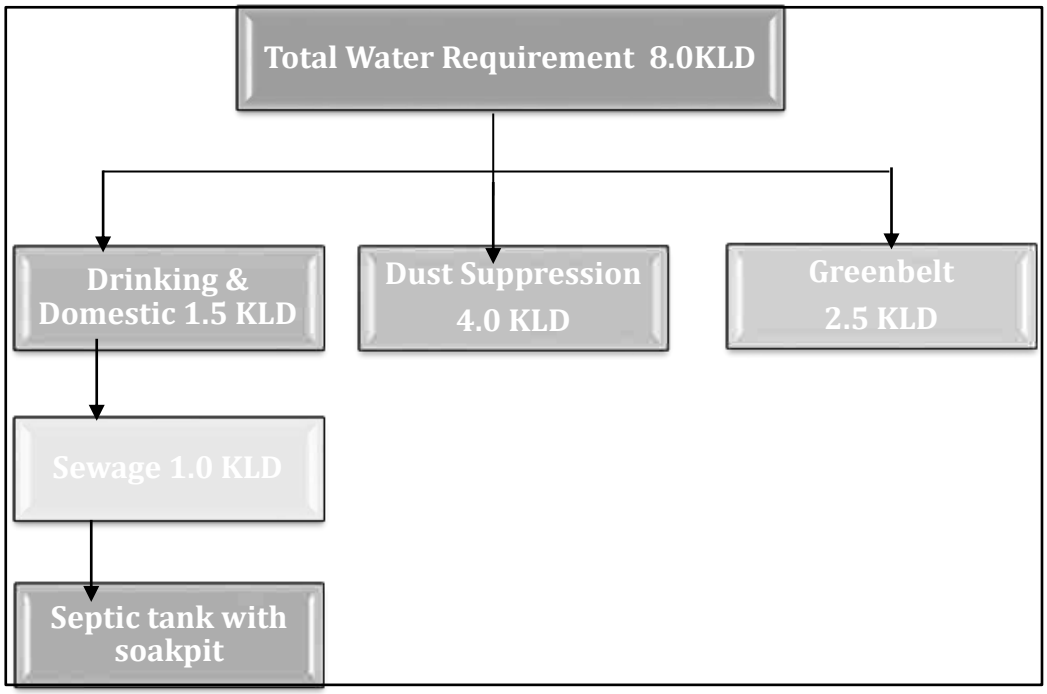

நிலத்தடி நீர்மீதான தாக்கம்

நிலத்தடி நீர் மட்டம் 68 மீ ஆழத்தில் இருப்பதால் சுரங்க நடவடிக்கை நிலத்தடி நீரை குறுக்கிட வாய்ப்பில்லை. சுரங்கமானது அதிகபட்ச ஆழம் 38 மீ (BGL) வரை செல்லும். எனவே சுரங்க நடவடிக்கையால் நிலத்தடி நீர்மட்டத்தில் குறுக்கிட வாய்ப்பு இருக்காது. எனவே நிலத்தடி நீரில் சுரங்கத்தின் தாக்கத்தை எதிர்பார்க்கவில்லை.

தணிப்பு நடவடிக்கைகள்;

- முழு குத்தகை பகுதியும் முறையான மழை வடிகால்கள் வழங்கப்படும்.
- திடப்பொருட்கள் கழுவப்படுவதைத் தடுக்கசாலை உடைகள் வழங்கப்படும்.
- புதிதாக தோண்டியதைச் சுற்றி மாலை வடிகால்கள் அமைப்பதால் தளர்வான பொருட்களுடன் நீர்பாய்வது தடுக்கப்படுகிறது.
- சுரங்க நீர் இயற்கையான சரிவுகள் மற்றும் பள்ளத்தாக்குகள் வழியாக அனுப்பப்பட்டு, குடியேற்ற தொட்டியில் (கீழ்குழி) குவிக்கப்படும்.

தாங்கல் மண்டலத்தில் நிலத்தடி நீர்சூழல்

விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் நிலத்தடி நீரின்பயன் பாடு கீழே கொடுக்கப்பட்டுள்ளது.

அட்டவணை 4.1 விழுப்புரம் (ஃபிர்கா) நிலத்தடி நீர் நிலை

வ. எண்	மதிப்பீட்டு அலகு (ஃபிர்கா)	நிகர ஆண்டு நிலத்தடி நீர் இருப்பு	பாசனத்திற்காக தற்போதுள்ள மொத்த நிலத்தடி நீர் நுகர்வு	உள்நாட்டு மற்றும் தொழில்துறை நீர் விநியோகத்திற்கான தற்போதைய மொத்த நிலத்தடி நீர் நுகர்வு	அனைத்து பயன்பாடுகளுக்கும் தற்போதுள்ள மொத்த நிலத்தடி நீர் நுகர்வு	நிலத்தடி நீர் வளர்ச்சியின் நிலை	வகை
1	மரக்காணம்	1572.03	1898.95	46.96	1945.91	124 %	அதிக பயன்பாடு

ஆதாரம்:nwm.gov.in

இப்பகுதியில் பொருத்தமான மழைநீர் சேகரிப்பு திட்டங்கள் மற்றும் செயற்கை ரீசார்ஜ் திட்டங்கள் செயல்படுத்த திட்டமிடப்பட்டுள்ளது.

4.2.3 தாவரங்கள்

முக்கிய மண்டலத்தில் தாவரங்கள்

சுரங்க குத்தகை பகுதி பெரிய தோட்டங்கள் இல்லாமல் உள்ளது. குத்தகை பகுதிக்குள் புதர்கள் முக்கியமாக காணப்படுகின்றன. 0.40.5 ஹெக்டேர் பரப்பளவில் பசுமை மண்டலத்தை உருவாக்க முன்மொழிந்தார். சுரங்க குத்தகைப் பகுதியைச் சுற்றி புங்கை, வாகை, வேம்பு, மஞ்சள் கொன்றை, நாவல், பூவரசு முதலிய போன்ற மரங்கள் நடப்படும். மொத்தம் 2400 மரங்கள் நட திட்டமிடப்பட்டுள்ளது. இடைவெளி 3 மீ x 3 மீ இருக்கும்.

விலங்கினங்கள்

10 கிமீ ஆய்வுப் பகுதியின் இடையகப் பகுதியில் சரணாலயங்கள்/தேசியப் பூங்காக்கள் எதுவும் இல்லை. இடையக மண்டலத்தில் பொதுவாக காணப்படும் விலங்கினங்கள் அத்தியாயம் III இல் கொடுக்கப்பட்டுள்ளன. சுரங்க நடவடிக்கையின் போது விலங்கினங்களுக்கான பாதிப்புகள் மற்றும் தணிப்பு நடவடிக்கைகள் கீழே உள்ள அட்டவணையில் கொடுக்கப்பட்டுள்ளன.

அட்டவணை 4.2 விலங்கினங்களுக்கான பாதிப்புகள் மற்றும் தணிப்பு நடவடிக்கைகள்		
வ.எண்	**தாக்கம்**	**தணிப்பு நடவடிக்கைகள்**
1	சத்தம் மற்றும் அதிர்வு காரணமாக விலங்கினங்கள் பாதிக்கப்படுகின்றன.	சுரங்கங்களில் வெடிக்கும் முன் சைரன்கள் ஊதப்படும். ஒலி அளவைக் குறைக்க, தோட்டம் செய்யப்படும். ஒதுக்கப்பட்ட நேரத்தில் மட்டுமே வெடிப்பு மேற்கொள்ளப்படும்.
2	சுரங்க நடவடிக்கைகளால் தூசி உருவாகிறது	தூசி உற்பத்தியைக் குறைக்க, நீர் தெளிப்பான்கள் பயன்படுத்தப்படும். போக்குவரத்தின் போது, தார்பாய் கொண்டு மூடப்பட்டிருக்கும். மாசு உற்பத்தியை குறைக்க தண்ணீர் தெளிக்கப்படும்.
3	குத்தகை பகுதியின் நில பயன்பாட்டில் மாற்றம்	சுரங்கம் மூடப்படும் நிலைக்குப் பிறகு, சுரங்கப் குழி மழை நீர் சேகரிப்புத் தொட்டியாக விடப்படும், இது அருகிலுள்ள பகுதிகளில் பறவைகளின் கூட்டத்தை ஈர்க்கும்.
4	விலங்குகள் தற்செயலாக விழுதல்	விலங்குகள் நுழைவதைத் தடுக்க, சுரங்க குத்தகையைச் சுற்றியுள்ள பகுதியில் முள்வேலி மூலம் சரியாக வேலி அமைக்கப்படும்.

4.3 சுற்றுச்சூழல் கூறுகளின் மீளமுடியாத மற்றும் திரும்பப்பெற முடியாத உறுதிப்பாடுகள்

4.3.1 சுரங்க நடவடிக்கை காரணமாக ஏற்படும் பாதிப்பு

முன்மொழியப்பட்ட சுரங்கத் திட்டத்திற்கும் சுற்றுச்சூழலுக்கு சாத்தியமான பாதகமான தாக்கங்களை மதிப்பிடுவதில் தாக்கக் கணிப்பு மிக முக்கியமான நிகழ்வாகும். சுற்றுச்சூழல் அபாயங்களைத் தணிக்க அல்லது அகற்றும் வகையில், பாதிப்பு முன்னறிவிப்பு எப்போதும் மோசமான சூழ்நிலையில் மேற்கொள்ளப்படுகிறது. இவ்வாறு கணக்கிடப்படும் இந்த கணிப்புகள், முன்மொழியப்பட்ட சுரங்கத் திட்டம் உற்பத்திக்கு வந்த பிறகு சுற்றுச்சூழலில் நிகர பாதிப்பைக் கணக்கிடுவதற்கு அடிப்படைத் தரவுகளின் மேல் மிகைப்படுத்தப்படுகின்றன.

4.3.2 காற்றுச்சூழலின் மீதான தாக்கம்

சுரங்க நடவடிக்கையால் காற்று சுற்றுச்சூழலில் ஏற்படும் பாதிப்புகள் உற்பத்தி திறன், சம்பந்தப்பட்ட இயந்திரங்கள், பல்வேறு உபகரணங்கள் மற்றும் வாகனங்களின் செயல்பாடுகள் மற்றும் பராமரிப்பு போன்ற பல்வேறு காரணிகளைச் சார்ந்துள்ளது. இவை தவிர, சுரங்க குத்தகை பகுதிக்குள் கனிம மற்றும் கழிவுகளை கொண்டு செல்வது, இருப்பு வைக்கும் வசதிகள் மற்றும் கழிவு மேலாண்மை ஆகியவை மாசுபாட்டிற்கு பங்களிக்கக்கூடிய பிற செயல்பாடுகள் இருக்கும்.

4.3.3 காற்று உமிழ்வுகள்

சுரங்க நடவடிக்கையால் காற்று சுற்றுச்சூழலில் ஏற்படும் பாதிப்புகள் உற்பத்தி திறன், சம்பந்தப்பட்ட இயந்திரங்கள், பல்வேறு உபகரணங்கள் மற்றும் வாகனங்களின் செயல்பாடுகள் மற்றும் பராமரிப்பு போன்ற பல்வேறு காரணிகளைச் சார்ந்துள்ளது. இவை தவிர, சுரங்க குத்தகை பகுதிக்குள் கனிம மற்றும் கழிவுகளை கொண்டு செல்வது, இருப்பு வைக்கும் வசதிகள் மற்றும் குப்பை மேலாண்மை ஆகியவை மாசுபாட்டிற்கு பங்களிக்கக்கூடிய பிற செயல்பாடுகள் இருக்கும்.

4.3.4 காற்று சுற்றுச்சூழலில் ஏற்படும் தாக்கங்களின் அளவு மதிப்பீடு

திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்க முறை மூலம் முன்மொழியப்பட்ட 8,89,700 கனமீட்டர் சாதாரணகல் மற்றும் 96,210 கனமீட்டர் கிராவல் காரணமாக, காற்று மாசுபாட்டின் அடிப்படையில் அடிப்படை நிலைக்கு மேலே பல்வேறு தரை மட்ட செறிவுகளின் அதிகரிக்கும் உயர்வைக் கணிக்கும் முயற்சி மேற்கொள்ளப்பட்டுள்ளது.

வளிமண்டலத்தில் வெளியிடப்படும் மாசுக்கள் காற்றின் கீழ் திசையில் சிதறி, இறுதியாக மூலத்திலிருந்து வெகு தொலைவில் தரையை அடையும். தரை மட்ட செறிவுகளின் செறிவு முக்கியமாக ஆய்வுப் பகுதியின் உமிழ்வு மூலத்தின் வலிமை மற்றும் நுண்ணுயிரியல் சார்ந்தது.

முன்மொழியப்பட்ட திட்டத்திலிருந்து உமிழ்வு காரணமாக தரை மட்ட செறிவுகளை மதிப்பிடுவதற்காக, EPA அங்கீகரிக்கப்பட்ட தொழில்துறை மூல வளாகம் ISC AERMOD காட்சி மாதிரி பயன்படுத்தப்பட்டது.

தற்போதைய ஆய்வில் காற்றின் தர தாக்கம் குறித்த கணிப்புகளுக்கு பயன்படுத்தப்படும் கணித மாதிரி ISC-AERMOD View-6.8.6 ஆகும். இது அடுத்த தலைமுறை காற்று சிதறல் மாதிரி, இது கிரக எல்லை அடுக்கு கருத்துகளை உள்ளடக்கியது.

AERMOD என்பது மூன்று தனித்தனி கூறுகளைக் கொண்ட ஒரு மாதிரி அமைப்பு ஆகும்:

AERMOD (AERMIC Dispersion Model), AERMAP (AERMOD நிலப்பரப்பு முன்செயலி) மற்றும் AERMET (AERMOD வானிலை முன்செயலி).

AERMOD இன் சிறப்பு அம்சங்களில், கிரக எல்லை அடுக்கின் செங்குத்தான ஒருமைப்பாட்டை கையாளும் திறன், மேற்பரப்பு வெளியீடுகளின் சிறப்பு சிகிச்சை, ஒழுங்கற்ற வடிவ பகுதி மூலங்கள், வெப்பச்சலன எல்லை அடுக்குக்கான ப்ளூம் மாதிரி, நிலையான எல்லை அடுக்கில் செங்குத்து கலவையின் வரம்பு மற்றும் சரிசெய்தல் ஆகியவை அடங்கும். அடுக்கு தளத்தில் பிரதிபலிக்கும் மேற்பரப்பு.

AERMET என்பது AERMODக்கான வானிலை முன்செயலியாகும். உள்ளீட்டுத் தரவு மணிநேர கிளவுட் கவர் அவதானிப்புகள், மேற்பரப்பு வானிலை அவதானிப்புகள் மற்றும் ஒரு நாளைக்கு இரண்டு முறை மேல் காற்று ஒலிகள் ஆகியவற்றிலிருந்து வரலாம்.

வெளியீட்டில் மேற்பரப்பு வானிலை அவதானிப்புகள் மற்றும் அளவுருக்கள் மற்றும் பல வளிமண்டல அளவுருக்களின் செங்குத்து சுயவிவரங்கள் ஆகியவை அடங்கும்.

AERMAP என்பது AERMODக்கான நிலப்பரப்புத் தரவின் உள்ளீட்டை எளிமைப்படுத்தவும் தரப்படுத்தவும் வடிவமைக்கப்பட்ட நிலப்பரப்பு முன்செயலியாகும். உள்ளீட்டுத் தரவுகளில் ஏற்பி நிலப்பரப்பு உயரத் தரவு அடங்கும். வெளியீட்டில், ஒவ்வொரு ஏற்பிகளுக்கும், இருப்பிடம் மற்றும் உயர அளவு ஆகியவை அடங்கும், இவை மலைகளைச் சுற்றியுள்ள காற்றோட்டத்தைக் கணக்கிடுவதற்குப் பயன்படுத்தப்படும் உயரங்கள்.

AERMOD மாதிரியின் முக்கிய அம்சங்கள் இங்கே கொடுக்கப்பட்டுள்ளன.

- ❖ எக்ஸ்காவ்வேடர் (தோண்டுதல்) நடவடிக்கைகள் பகுதி ஆதாரங்களாகக் கருதப்படுகின்றன.
- ❖ சாலைகளில் பொருள் கொண்டு செல்வது வரி ஆதாரமாகக் கருதப்படுகிறது

AERMOD மாதிரியைப் பயன்படுத்தி கணக்கிடப்பட்ட ஆய்வுக் காலத்திற்கான கணிக்கப்பட்ட தரை மட்ட செறிவுகள் ஐசோபிளத்களாகத் திட்டமிடப்பட்டுள்ளன.

4.3.5 தூசி வெளியேற்றத்தின் ஆதாரங்கள்

முன்மொழியப்பட்ட சுரங்கமானது இயந்திரமயமாக்கப்பட்ட திறந்தவெளி முறை மூலம் மேற்கொள்ளப்படுகிறது. தாது கையாளுதல் செயல்பாடுகள், போக்குவரத்து மற்றும் தாதுவின் திரையிடல் ஆகியவற்றால் உருவாக்கப்படும் காற்றில் பரவும் துகள்கள் முக்கிய காற்று மாசுபடுத்தியாகும். கந்தக டை ஆக்சைடு (SO2), நைட்ரஜன் ஆக்சைடுகள் (NOx) ஆகியவற்றின் உமிழ்வுகள் டீசல் மூலம் இயக்கப்படும் எக்ஸ்காவ்வேடர் /லோடிங் கருவிகள் மற்றும் போக்குவரத்து சாலைகளில் ஓடும் வாகனங்கள் ஆகியவை சிறிய அளவில் உள்ளன. முன்மொழியப்பட்ட உற்பத்தி மற்றும் உமிழ்வுகளின் நிகர அதிகரிப்பு ஆகியவற்றைக் கருத்தில் கொண்டு காற்றுச் சூழலில் ஏற்படும் பாதிப்புகளின் கணிப்பு மேற்கொள்ளப்பட்டுள்ளது. கனிம உற்பத்தியில் ஈடுபட்டுள்ள பல்வேறு செயல்பாடுகளின் அடிப்படையில், பல்வேறு உமிழ்வு ஆதாரங்கள் கீழே கொடுக்கப்பட்டுள்ளபடி அடையாளம் காணப்பட்டுள்ளன.

a. பகுதி ஆதாரங்கள்.

b. வரி ஆதாரங்கள்.

சுரங்கத்திலிருந்து கனிமத்தைப் பிரித்தெடுப்பது, பகுதி ஆதாரமாகக் கருதப்படுகிறது. சுரங்க பெஞ்சுகளில் இருந்து பல்வேறு இறுதிப் புள்ளிகளுக்கு பொருட்களை கொண்டு செல்வது வரி ஆதாரங்களாக கருதப்படுகிறது. காற்று சூழலில் மேற்கூறிய ஆதாரங்களின் தாக்கம் கீழே விவாதிக்கப்படுகிறது:

காற்று மாசுபாட்டின் மற்ற ஆதாரங்கள், டிப்பர்கள் கனிமம் எடுத்து செல்லும் சாலையில் செல்லும் போது உருவாகும் தூசுகள் ஆகும். தூசியை திறம்பட அடக்குவதை உறுதி செய்வதற்காக, கனிமம் எடுத்து செல்லும் சாலைகளில் தொடர்ந்து தண்ணீர் தெளிக்க, தெளிக்கும் ஏற்பாட்டுடன் கூடிய தண்ணீர் டேங்கர்கள் பயன்படுத்தப்படும். டிப்பர்கள் நன்கு பராமரிக்கப்படுகின்றன, இதனால் வெளியேற்றும் புகையானது தீங்கு விளைவிக்கும் வாயுக்கள் மற்றும் எரிக்கப்படாத ஹைட்ரோகார்பன்களின் அசாதாரண மதிப்புகளை பங்களிக்காது.

4.3.6 உமிழ்வு விவரங்கள்

மேலே விவாதிக்கப்பட்ட அனைத்து உமிழ்வுகளும் அதிகபட்சமாக 8,89,700 கனமீட்டர் சாதாரணகல் மற்றும் 96,210 கனமீட்டர் கிராவல் திறந்த வெளி இயந்திரமயமாக்கப்பட்ட சுரங்க முறையின் மூலம் கணக்கிடப்படுகிறது. தற்போதுள்ள காற்றின் தர நிலைகள் அடிப்படை சூழ்நிலையில் உள்ளன.

தோண்டுதல், ஏற்றுதல் மற்றும் டிப்பர்கள் மூலம் போக்குவரத்து ஆகியவை முக்கிய ஆதாரங்கள், அவை முக்கியத்துவம் வாய்ந்தவை. எனவே, மாடலிங்கிற்காகக் கருதப்படும் உமிழ்வுகள் துளையிடல் வெடித்தல், தோண்டுதல் & போக்குவரத்து.

AP-42 உமிழ்வு காரணிகளின் அடிப்படையில் உமிழ்வுகள் கணக்கிடப்படுகின்றன. செயல்பாட்டு நேரம், செயல்பாட்டு வீதம், காற்றின் வேகம் மற்றும் ஈரப்பதம் ஆகியவை புள்ளி மற்றும் பகுதி மூலங்களிலிருந்து உமிழ்வுகளை மதிப்பிடுவதற்கு பரிசீலிக்கப்பட்டது. வரி மூலத்திற்கு, செயல்பாட்டு நேரம் தவிர, செயல்பாட்டு விகிதம், ஈரப்பதம், வண்டல் உள்ளடக்கம் மற்றும் வாகன எடை ஆகியவை பரிசீலிக்கப்பட்டுள்ளன.

எக்ஸ்காவ்வேடர் (பகுதி ஆதாரங்கள்) மற்றும் டிப்பர்கள் ஒரே நேரத்தில் சுரங்க குழியிலிருந்து ஏற்றுதல் குழிக்கு (வரி ஆதாரங்கள்) 500 மீ தூரத்திற்கு கொண்டு செல்வதற்கான மிக மோசமான சூழ்நிலையில் கணிப்புகள் மேற்கொள்ளப்படுகின்றன.

வேலை நாட்களின் எண்ணிக்கை ஆண்டுக்கு 300 நாட்களில் 8 மணிநேர செயல்பாடு/நாளுடன் எடுக்கப்பட்டது, எனவே கணிக்கப்பட்ட செறிவுகள் மிக மோசமானதாகக் கருதப்படுகிறது. கட்டுப்பாட்டு நடவடிக்கைகளுடன், உமிழ்வுகள் கையாளுதலுக்கான கட்டுப்பாடற்ற உமிழ்வுகளில் 30% மற்றும் போக்குவரத்துக்கான கட்டுப்பாடற்ற உமிழ்வுகளில் 10% எடுக்கப்பட்டுள்ளன.

4.3.7 வானிலை தரவு

மார்ச் 2024- மே 2024 மாதங்களில் காற்றின் வேகம், காற்றின் திசை மற்றும் வெப்பநிலை ஆகியவற்றின் அடிப்படையில் மணிநேர அடிப்படையில் தொடர்ந்து பதிவு செய்யப்பட்ட வானிலை தரவு, AERMOD மாதிரியைப் பயன்படுத்துவதற்கு IMD மற்றும் MoEF இன் வழிகாட்டுதல்களின்படி 24 மணிநேர சராசரி வானிலை தரவுகளைப் பிரித்தெடுக்க செயலாக்கப்பட்டது. மாடலிங் குறித்து CPCB வழங்கிய வழிகாட்டுதல்களின் அடிப்படையில் சராசரி மணிநேரங்களுக்கு ஸ்திரத்தன்மை வகுப்புகள் கணக்கிடப்படுகின்றன. பிராந்தியத்தின் கலவை உயரங்களின் பிரதிநிதிகள் கிடைக்கக்கூடிய வெளியிடப்பட்ட இலக்கியங்களிலிருந்து எடுக்கப்பட்டுள்ளனர்.

4.3.8 கணிக்கப்பட்ட தரைமட்ட செறிவுகளின் சுருக்கம்

சுரங்க நடவடிக்கைகளின் காரணமாக நில மட்ட செறிவுகள், ஆய்வுப் பகுதியில் அதிகரிக்கும் அதிகரிப்பு மற்றும் தாக்கத்தின் அளவை அறிய மதிப்பிடப்பட்டுள்ளது.

அதிகபட்ச தரை மட்ட செறிவு சுமார் 1.28 µg/m3 PM 2.5 & 2.42 µg/m3 of PM10 என மதிப்பிடப்பட்டுள்ளது, சுரங்கப் பகுதி மற்றும் அதைச் சுற்றியுள்ள கிளஸ்டர் பகுதி 1.87 µg/m3 PM 2.5 & 3.20 µg/m3 பிஎம்10, அங்கு சுரங்க நடவடிக்கைகள் மேற்கொள்ளப்பட்டு வருகின்றன. சுரங்க நடவடிக்கைகளின் தாக்கம் 0.5 கிமீக்கு அப்பால் மிகக் குறைவாக இருக்கும்.

படம் - 4.2 குவாரியின் உமிழ்வுகள் காரணமாக PM10 இன் கணிக்கப்பட்ட தரை மட்ட செறிவுகளின் இடஞ்சார்ந்த பரவலைக் குறிக்கிறது.

4.3.9 உமிழ்வு ஆதாரங்கள் & அளவீடு

திரு.V.நாகராஜன் இன் முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரியிலிருந்து உமிழ்வுகளின் ஆதாரங்கள் பல்வேறு புள்ளி மற்றும் புள்ளி அல்லாத. அளவிடப்பட்டு கீழே வழங்கப்பட்டுள்ளன:

பகுதி உமிழ்வுகள் – மொத்தப் பொருள் கையாளுதல் திரு.V.நாகராஜன் (சாதாரணகல் மற்றும் கிராவல்)

அளவு, கன மீட்டர்	சாதாரண கல் : 8,89,700 மீ^{3} கிராவல்: 96,210 மீ^{3}
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
செயல்பாட்டு விகிதம், t/hr.	396.41362
தூசி உமிழ்வு, g/t.	0.16
தூசி உமிழ்வு, g /hr.	51.41276
செல்வாக்கு பகுதி, எம்2	625
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m2	0.0000143626
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m2	0.000001436263
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m2	0.0000095750

பகுதி உமிழ்வுகள் - மொத்தப் பொருள் கையாளுதல் (கிளஸ்டர் சாதாரணகல் மற்றும் கிராவல்)

அளவு, கன மீட்டர்	**தற்போதுள்ள குவாரிகள்:** • திரு. ரவிச்சந்திரன் குவாரி (பரப்பு – 1.35 ஹெக்டேர்) - சாதாரண கல் (1,02,475 மீ3) & கிராவல் குவாரி (6328 மீ3). • திரு. துரை குவாரி (பரப்பு – 1.85.00 ஹெக்டேர்)- சாதாரண கல் (1,87,420 மீ3) & கிராவல் குவாரி (24616 மீ3). • திரு.கோபிநாத் குவாரி (பரப்பு – 3.35.0 ஹெக்டேர்)- சாதாரண கல் (6,22,300 மீ3) & கிராவல் குவாரி (53148 மீ3).
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
செயல்பாட்டு விகிதம், t/hr.	390.2151
தூசி உமிழ்வு, g/t.	0.20
தூசி உமிழ்வு, g /hr.	57.638785
செல்வாக்கு பகுதி, எம்2	625
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m2	0.00072569
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m2	0.000725690
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m2	0.0000483793

வரி ஆதாரம் – குழியிலிருந்து எல்லை வரை சாதாரணகல் மற்றும் கிராவல் போக்குவரத்து

அளவு, கனமீட்டர்	சாதாரண கல் : 8,89,700m^3 கிராவல்: 96,210m^3
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
ஒவ்வொரு டம்பரின் கொள்ளளவு (டி)	10
டிப்பர்களின் மொத்த எண்ணிக்கை/ வருடம்	19718
முன்னணி நீளம்/பயணம், கிமீ	0.16
மொத்த VKT/நாள்	63947
உமிழ்வு Kg/VKT	0.25
மொத்த உமிழ்வு கிலோ/ஆண்டு	18314.02
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m	2.39377
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m	0. 239377
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m	0.14013

வரி ஆதாரம் - குழியிலிருந்து எல்லைக்கு சாதாரணகல் மற்றும் கிராவல் போக்குவரத்து

அளவு, கனமீட்டர்	**தற்போதுள்ள குவாரிகள்:** • திரு. ரவிச்சந்திரன் குவாரி (பரப்பு – 1.35 ஹெக்டேர்) - சாதாரண கல் (1,02,475 மீ3) & கிராவல் குவாரி (6328 மீ3). • திரு. துரை குவாரி (பரப்பு – 1.85.00 ஹெக்டேர்)- சாதாரண கல் (1,87,420 மீ3) & கிராவல் குவாரி (24616 மீ3). • திரு.கோபிநாத் குவாரி (பரப்பு – 3.35.0 ஹெக்டேர்)- சாதாரண கல் (6,22,300 மீ3) & கிராவல் குவாரி (53148 மீ3).
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
ஒவ்வொரு டம்பரின் கொள்ளளவு (டி)	10
டிப்பர்களின் மொத்த எண்ணிக்கை/ வருடம்	99628
முன்னணி நீளம்/பயணம், கிமீ	0.9
மொத்த VKT/நாள்	11200
உமிழ்வு Kg/VKT	0.24
மொத்த உமிழ்வு கிலோ/ஆண்டு	224561
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m	1209484
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m	0.1209484
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m	0.0354143

குறிப்பு: *2 மீ/வி காற்றின் வேகம் மற்றும் 10% ஈரப்பதத்தின் அடிப்படையில் உமிழ்வு காரணி கணக்கிடப்படுகிறது. + உமிழ்வு காரணி 10%

படம் 4.2 PM 2.5 க்கான GLC கணிப்பு ஜசோப்லெத்

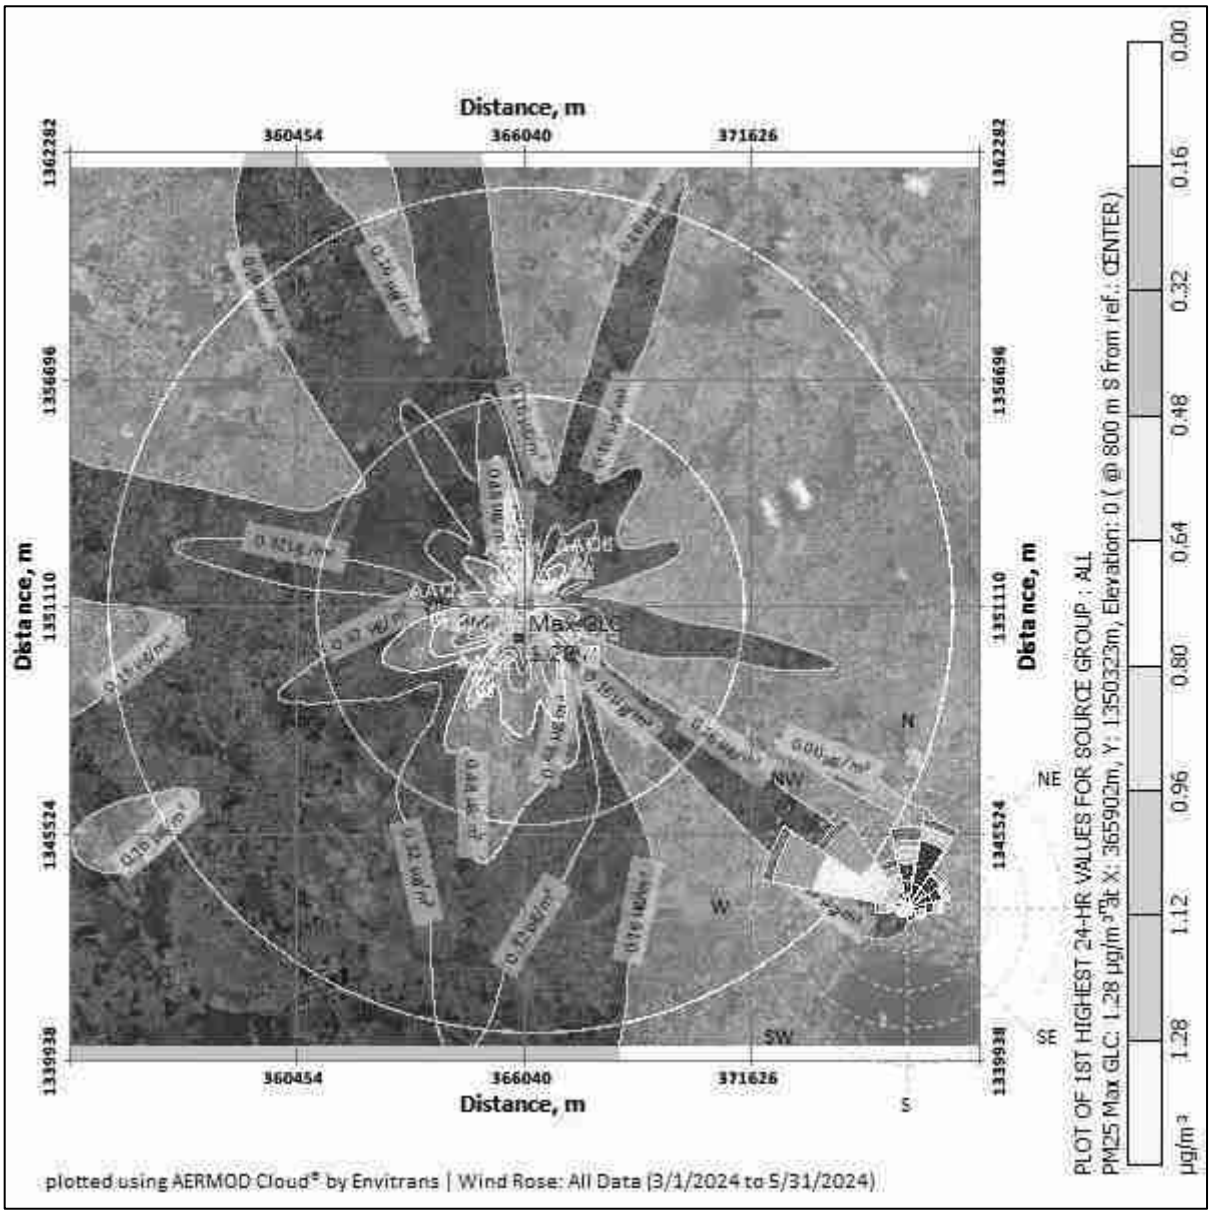

படம் 4.3 PM10 க்கான GLC கணிப்பு ஜசோப்லெத்

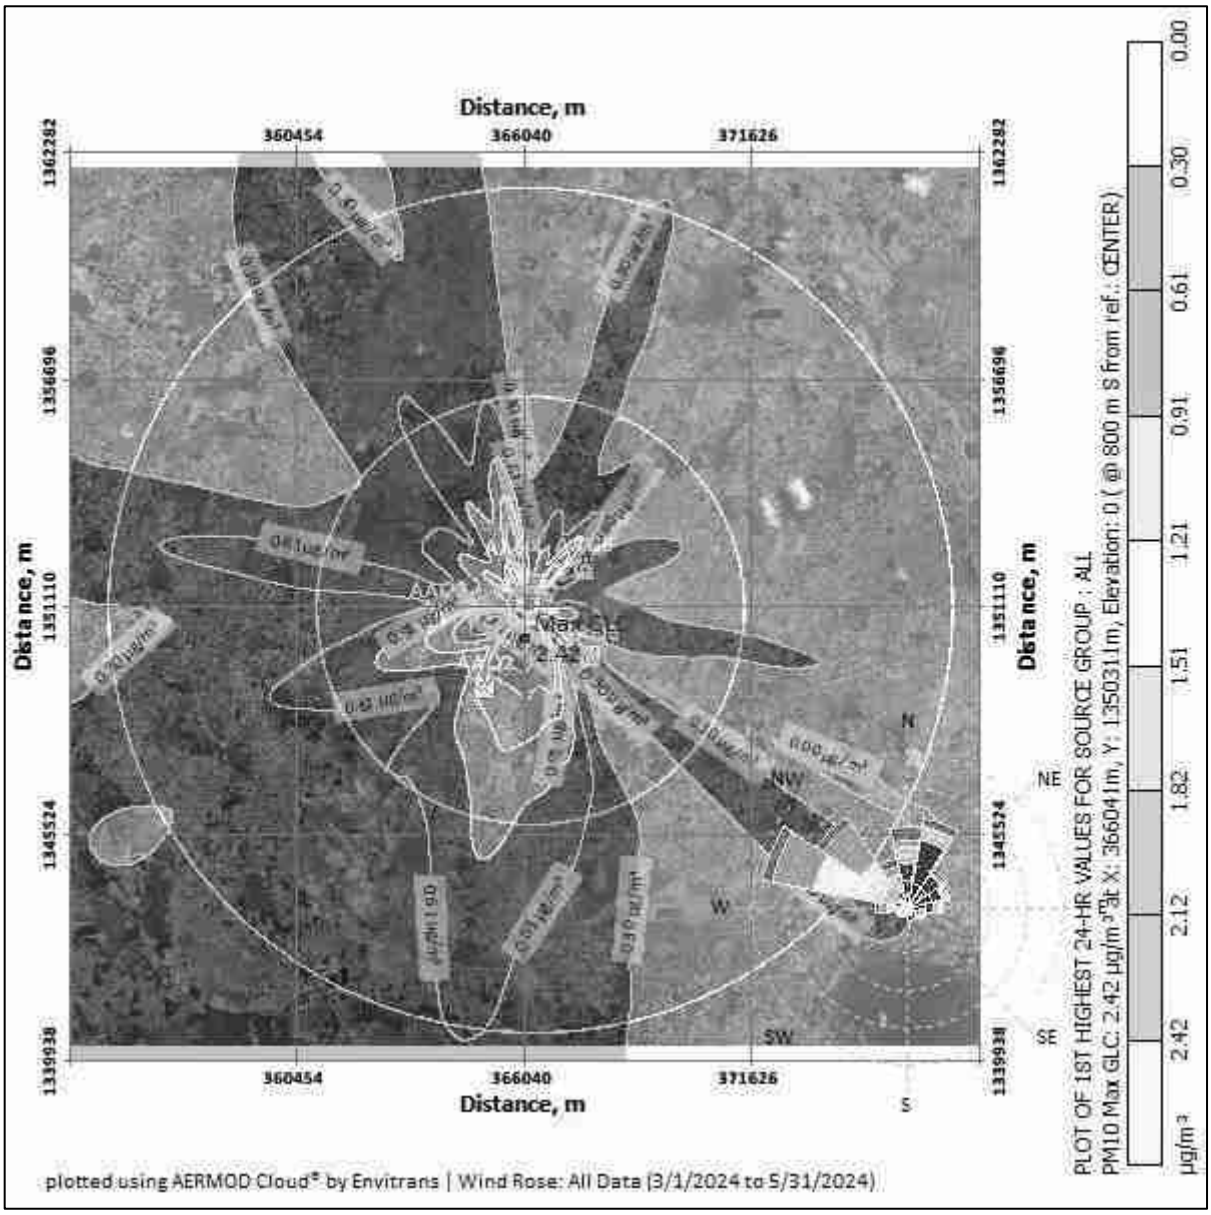

படம் 4.4 GLC முன்கணிப்பின் ஐசோப்லெத் - PM2.5க்கான ஒட்டுமொத்த

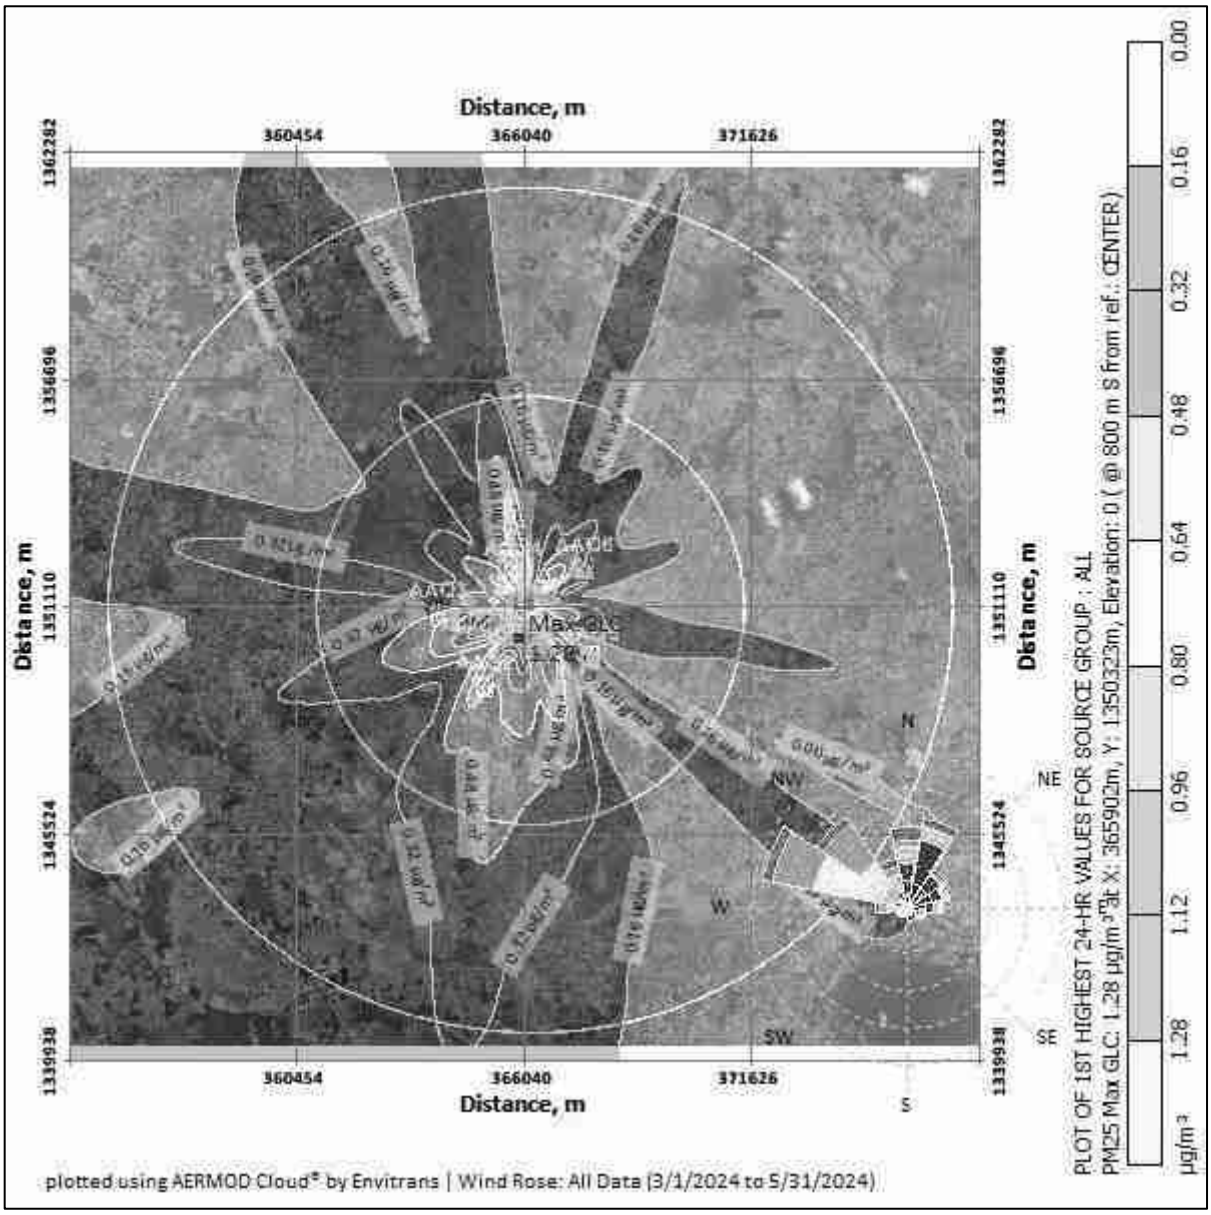

படம் 4.5 GLC முன்கணிப்பின் ஐசோப்லெத்–PM10 க்கான ஒட்டுமொத்த

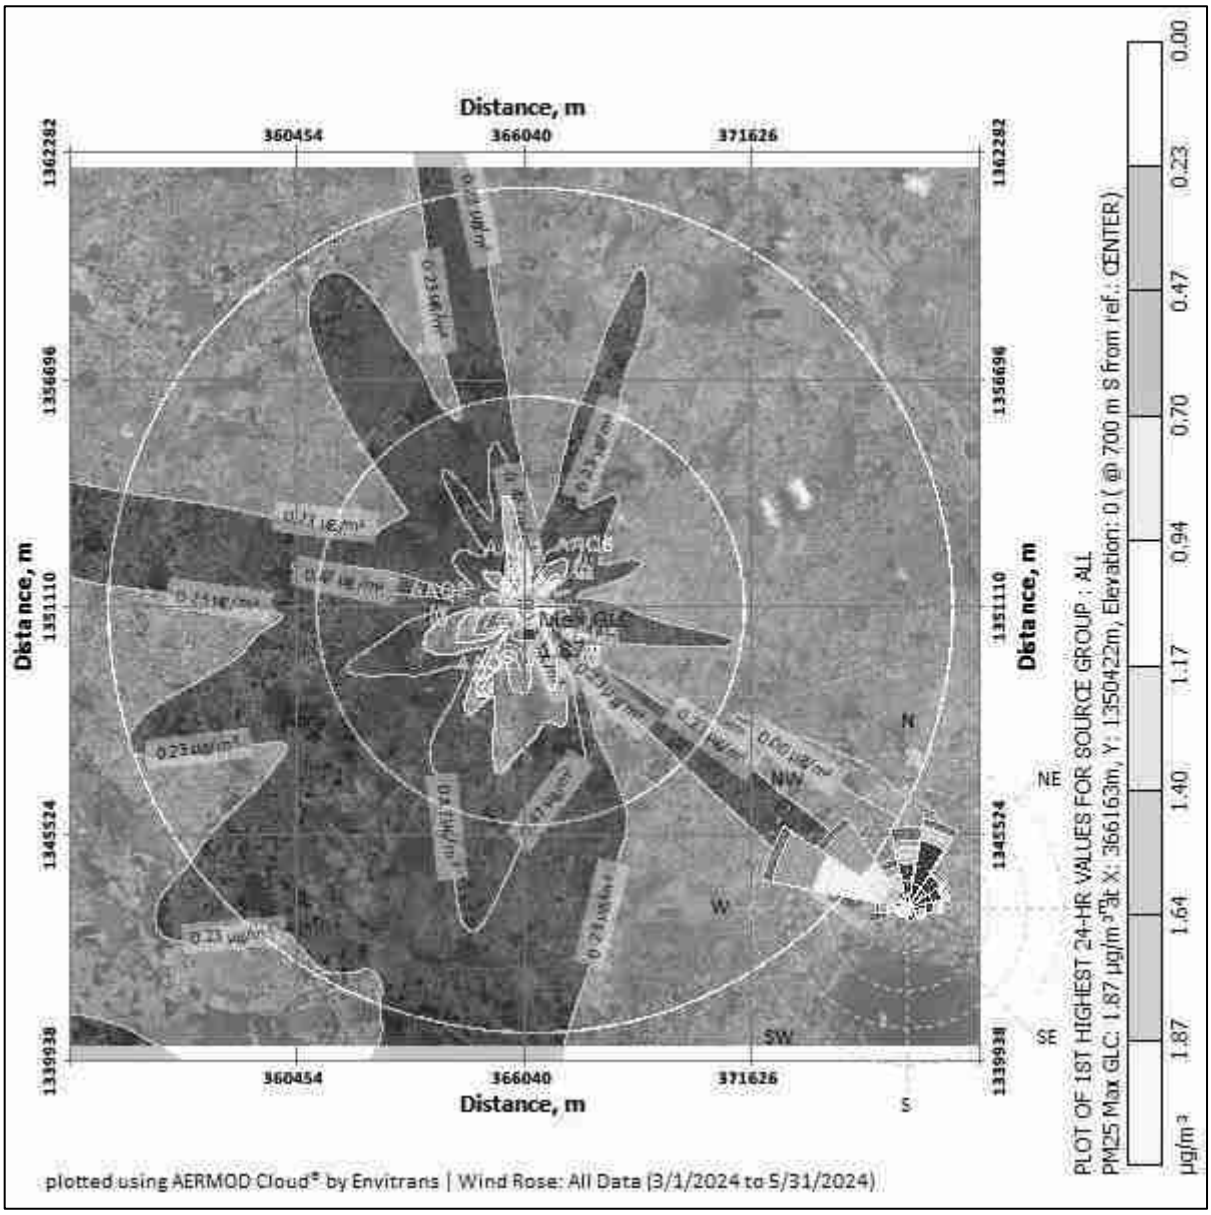

கணிக்கப்பட்ட சுற்றுப்புற காற்றின் தரம்:

பிஎம்10, பிஎம்2.5, (ஜிஎல்சி) (அடிப்படைக்கோடு + அதிகரிப்பு) ஆகியவற்றின் பிந்தைய திட்ட செறிவுகள், தேவையான கட்டுப்பாட்டு நடவடிக்கைகளை எடுத்த பிறகு அட்டவணை எண் - 4.3 இல்கொடுக்கப்பட்டுள்ளது.

அட்டவணை 4.3 திட்டம் செயல் படுத்தப்பட்ட பிறகு PM2.5 செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	25.75	1.28	27.03	60
2	நல்முக்கல்	24.30	1.12	25.42	
3	சீனலூர்	21.34	0.96	22.3	
4	குன்னபாக்கம்	20.87	0.80	21.67	
5	ஏந்தூர்	22.15	0.48	22.63	
6	தென்னம்பூண்டி	22.40	0.32	22.72	
அட்டவணை 4.3.a திட்ட அமலாக்கத்திற்குப் பிறகு PM2.5 இன் கிளஸ்டர் செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	25.75	1.87	27.62	60
2	நல்முக்கல்	24.30	1.64	25.95	
3	சீனலூர்	21.34	1.40	22.74	
4	குன்னபாக்கம்	20.87	1.17	22.04	
5	ஏந்தூர்	22.15	0.94	23.09	
6	தென்னம்பூண்டி	22.40	0.70	23.10	
அட்டவணை 4.3.b திட்டம் செயல் படுத்தப்பட்ட பிறகு PM210 செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	54.25	2.42	56.67	100
2	நல்முக்கல்	48.65	2.12	50.77	
3	சீனலூர்	43.70	1.82	45.52	
4	குன்னபாக்கம்	46.40	1.51	47.91	
5	ஏந்தூர்	44.75	1.21	45.96	
6	தென்னம்பூண்டி	47.85	0.61	48.46	

அட்டவணை 4.3.c திட்ட அமலாக்கத்திற்குப் பிறகு PM10 இன் கிளஸ்டர் செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	54.25	3.20	57.45	100
2	நல்முக்கல்	48.65	2.80	51.45	
3	சீனலூர்	43.70	2.00	45.70	
4	குன்னபாக்கம்	46.40	1.60	48.00	
5	ஏந்தூர்	44.75	1.20	45.95	
6	தென்னம்பூண்டி	47.85	0.80	48.65	

மேலே உள்ள அறிக்கை, மோசமான சூழ்நிலையிலும் கூட, அடிப்படை புள்ளிவிவரங்களுடன் கூடிய செறிவுகள், PM10க்கான சுற்றுப்புற காற்றின் தரத்தின் மதிப்புகள் 45.52 µg/m3 முதல் 56.67 µg/m3 வரையிலும், PM2.5க்கு வரம்பிலும் இருப்பதைக் காட்டுகிறது. 21.67 µg/m3 முதல் 27.03 µg/m3 வரையிலும், PM10 என்பது 45.70 µg/m3 முதல் 57.45 µg/m3 வரையிலும், PM2.5 க்கு 21.67 µg/m3 µg/m3 வரை 27 வரையிலும் உள்ளது. ஒவ்வொரு வழக்கிலும் சட்ட வரம்புகளுக்குள் உள்ளன. காற்று மாசுபாட்டைக் கட்டுப்படுத்த சுரங்கத்தில் மேற்கொள்ளப்பட்ட தணிப்பு நடவடிக்கைகள் கீழே கொடுக்கப்பட்டுள்ளன.

- துளையிடும் செயல்பாட்டில் ஈரமான துளையிடுதல் நடைமுறைப்படுத்தப்படும்.
- கனிமம் எடுத்து செல்லும் சாலைகள் மற்றும் ஏற்றுதல் போன்றவற்றில் தண்ணீர் தெளித்தல் செய்யப்படும்.
- சுரங்கத் தொழிலாளர்களுக்கு தூசி முகமூடிகள் வழங்கப்படுகின்றன.
- பாதுகாப்பு வலயத்தில் மூன்று அடுக்கு தோட்டம்.

உற்பத்தியாளரின் விவரக்குறிப்புகளின்படி DG தொகுப்புகள் அவ்வப்போது பராமரிக்கப்படும்.

4.4 தாக்கங்களின் முக்கியத்துவத்தை மதிப்பீடு செய்தல் (முக்கியத்துவத்தை தீர்மானிப்பதற்கான அளவுகோல்கள், முக்கியத்துவத்தை ஒதுக்குதல்).

4.4.1. இரைச்சல் சூழல்

தோண்டுதல், துளையுடுதல், ஏற்றுதல் மற்றும் போக்குவரத்து ஆகியவை சுரங்க செயல்பாடு மற்றும் தொடர்புடைய செயல்பாடுகளின் போது சத்தத்தை உருவாக்கும் முக்கிய ஆதாரம். டீசல் ஜெனரேட்டரின் செயல்பாட்டின் காரணமாக இடைவிடாத சத்தம் உருவாகிறது.

4.4.2 சுரங்க நடவடிக்கை காரணமாக குத்தகை பகுதியில் ஒலி அளவுகள் இருக்கலாம்

வ.எண்	மூலப் பெயர்	இரைச்சல் அளவு db(A)
1	டீசல் ஜெனரேட்டர்	90
2	தோண்டுதல் செயல்பாடு	86
3	லாரிகள் இயக்கம்	82
4	துளையிடுதல்	96
5	வெடித்தல்	102

சுரங்க குத்தகை பகுதிக்குள் உருவாக்கப்படும் சத்தம் மட்டுப்படுத்தப்படும் என்றும், இடையக மண்டலத்தில் சத்தத்தின் அதிகமான விளைவு எதுவும் இருக்காது என்றும் எதிர்பார்க்கப்படுகிறது. இயந்திரங்களின் தீவிர பராமரிப்பு மூலம் இரைச்சல் அளவு வரம்புக்கு கீழே பராமரிக்கப்படும். சுரங்க நடவடிக்கையின் போது இரைச்சல் அளவைக் குறைக்க தூசி பிரித்தெடுக்கும் கருவியுடன் ஈரமான துளையிடல் பயன்படுத்தப்படுகிறது.

குத்தகை பகுதி மற்றும் அருகிலுள்ள கிராமங்களான நல்முக்கல், சீனலூர், குன்னபாக்கம், ஏந்தூர், தென்னம்பூண்டி கிராமங்களில் ஒலி அளவுகள் அளவிடப்பட்டன. மதிப்புகள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 4.4 கண்காணிப்பு இடங்களில் இரைச்சல் நிலைகள்

வ.எண்	இடம்	சுரங்க குத்தகை பகுதியிலிருந்து தூரம் மற்றும் திசை	பகல் சமமான (dBA இல்)	இரவு சமமான (dBA இல்)
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	மையபகுதி	39.3	38.0
2	நல்முக்கல்	2.13 கிமீ, தென்மேற்கு	50.5	41.8
3	சீனலூர்	2.20 கிமீ, மேற்கு	48.3	39.8
4	குன்னபாக்கம்	1.02 கிமீ, வடமேற்கு	50.9	42.2
5	ஏந்தூர்	1.80கிமீ, வடமேற்கு	46.8	40.8
6	தென்னம்பூண்டி	1.65 கிமீ, வடகிழக்கு	45.5	42.0

இரைச்சல் அளவுகள் MoEF & CC வரம்புகளுக்குள் 70 dB(A) வேலை செய்யும் பகுதி மற்றும் இடையகப் பகுதிகளில், மதிப்புகள் 75 dB(A) வரம்பிற்குக் கீழே இருக்கும். மேலே குறிப்பிட்டுள்ள இடங்களுக்கும் குடியிருப்புப் பகுதி விதிமுறைகள்

பரிசீலிக்கப்பட்டதால், சுரங்கச் செயல்பாட்டின் போது சுரங்க குத்தகைப் பகுதி தொழில்துறைப் பகுதி/குவாரிப் பகுதியாகக் கருதப்படும், அதற்கான DGMS விதிமுறைகள் 85 dB(A)/CPCB வழிகாட்டுதல்கள் 75 dB(A).

4.4.3 சுரங்கத்தால் ஏற்படும் சத்தத்தின் தாக்கம்

குத்தகை பகுதிக்கு உள்ளேயும் வெளியேயும் கனிமங்களை துளையிடுதல், வெடிக்கச் செய்தல் மற்றும் கொண்டு செல்வது போன்ற செயல்பாடுகளால் சுரங்கத்தில் சத்தம் உண்டாகிறது.

- DGMS (சுரங்கப் பாதுகாப்பு பொது இயக்குநரகம்) வரம்புகளின்படி, 8 மணிநேர வெளிப்பாடு காலத்திற்கு ஏற்றுக்கொள்ளக்கூடிய இரைச்சல் அளவு 85 dB(A) ஆகும்.
- உரத்த சத்தத்தை வெளிப்படுத்துவது உயர் இரத்த அழுத்தம், இதய நோய், தூக்கக் கலக்கம் மற்றும் மன அழுத்தத்தையும் ஏற்படுத்தும். ஒலி மாசுபாடு வனவிலங்குகளின் ஆரோக்கியத்தையும் நல்வாழ்வையும் பாதிக்கிறது.
- பரிந்துரைக்கப்பட்ட வரம்புகளை மீறும் சத்தம் அசாதாரணமான சத்தம் உணர்தல், டின்னிடஸ் போன்ற குறைபாடுகளை ஏற்படுத்தும்.

4.5. தணிப்பு நடவடிக்கைகள்

4.5.1 சத்தம்அளவைக்கட்டுப்படுத்துவதற்கானதணிப்புநடவடிக்கைகள்

- மூலத்திற்கும் ஏற்பிக்கும் இடையே உள்ள தூரம் அதிகரிக்கும் போது, இரைச்சல் அளவு குறைகிறது. எனவே, இயற்கையாக குறைவு ஏற்படும்.
- குத்தகைப் பகுதியின் சுற்றளவில் பசுமைப் பட்டையை உருவாக்க முன்மொழிபவர் திட்டமிட்டுள்ளார்.
- சத்தம் எழுப்புவதைக் கட்டுப்படுத்த சம்பந்தப்பட்ட அனைத்து உபகரணங்களும் /இயந்திரங்களும் / டிப்பர்களும் முறையாகப் பராமரிக்கப்படும்.
- சம்பந்தப்பட்ட ஊழியர்களுக்கு வழக்கமான சுகாதார பரிசோதனைகளை நடத்துதல்.
- ஊழியர்கள் வெளிப்படும் நேரத்தைக் குறைப்பதற்காக ஷிப்டுகளில் பணிபுரியச் செய்யப்படுவார்கள்.
- அனைத்து ஊழியர்களுக்கும் காது செருகிகளை வழங்குதல்.
- முடிந்தவரை பச்சை சுவர்கள்/வலைகளை வழங்குதல்

இந்த நடவடிக்கைகளை மேற்கொள்வதன் மூலம், அடிப்படை மதிப்பு குறைவாக இருப்பதால், MoEF & CC வரம்புகளுக்குள் இரைச்சல் அளவுகள் நன்கு பராமரிக்கப்படும்.

4.5.2. அதிர்வுகாரணமாக ஏற்படும் பாதிப்புகள்

பின்வரும் செயல்பாடுகள் காரணமாக நிலத்தில் மிகக் குறைவான அதிர்வு இருக்கும்.

- வெடிப்பு காரணமாக
- துளை இடுதல் காரணமாக
- இயந்திரங்களின் இயக்கம் காரணமாக

தாக்கங்கள்

- குத்தகை பகுதிக்குள் பணிபுரியும் நபர்களால் மட்டுமே அதிர்வு உணரப்படும் என்றாலும், அது பொதுவாக விரும்பத்தகாதது.
- அதிர்வு ஃப்ளைராக்ஸையும் ஏற்படுத்தலாம்.
- குத்தகை பகுதியில் உள்ள பறவைகள் மற்றும் சிறு பூச்சிகளை இது பயமுறுத்தலாம் இருப்பினும் குறுகிய காலத்திற்கு மட்டுமே உணரப்படும்.

தணிப்பு நடவடிக்கைகள்

- DG செட் கல் தொகுதிகளால் செய்யப்பட்ட ஒலி அடைப்புக்குள் வைக்கப்படும்.
- ததுலைப்பான்கள் கூர்மையான பிட்களுடன் பொருத்தப்பட்டிருக்கும் மற்றும் ஈரமான துளையிடல் ஏற்றுக்கொள்ளப்படும்.
- இரைச்சல் அளவைக் குறைக்க சுரங்கத்திற்கு நன்கு திட்டமிடப்பட்ட பச்சை வளையம் முன்மொழியப்பட்டது.
- பாறை வெடிப்புக்கு முன் முறையான எச்சரிக்கை அமைப்பு பின்பற்றப்படும் மற்றும் வெடிப்பதற்கு முன் பகுதியின் அனுமதி உறுதி செய்யப்படும்.
- இரைச்சல் அளவைக் குறைக்க இயந்திரங்கள் மற்றும் வாகனங்களின் வழக்கமான பராமரிப்பு மேற்கொள்ளப்படும்.
- இரைச்சலைத் தொழில் ரீதியாக வெளிப்படுத்தும் தொழிலாளர்களால் காது மஃப்ஸைப் பயன்படுத்துதல்.
- வரையறுக்கப்பட்ட அளவில் வெடிப்பை மேற்கொள்வது மதியம் 12:00 முதல் மதியம் 2:00 மணி வரை மட்டுமே.
- DGMS மற்றும் MOEF & CC பரிந்துரைத்தபடி தரநிலைக்குள் உச்ச துகள் வேகத்தை பராமரிப்பதன் மூலம் பறக்கும் பாறை மற்றும் அதிர்வுகளை கட்டுப்படுத்துதல்.
- குறைந்த ஆழத்தில் ஜாக்ஹாம்மர் துளையிடுதல் மற்றும் வெடித்தல் ஆகியவை குறைந்தபட்ச வெடிமருந்துகளைப் பயன்படுத்தி மேற்கொள்ள உத்தேசிக்கப்பட்டுள்ளது.
- திறமையான மற்றும் சட்டப்பூர்வ ஃபோர்மேன்/ சுரங்க மேலாளரால் வெடிப்பை மேற்பார்வை செய்தல்.

4.5.3. சமூக பொருளாதார தாக்கம்

குத்தகை பகுதி பட்டா நிலமாகும். CER நடவடிக்கைகளுக்காக INR 8,00,000 செலவழிக்க முன்மொழிபவர் திட்டமிட்டுள்ளார்.

4.5.4 தொழில் ஆரோக்கியம்

பல்வேறுசுரங்கநடவடிக்கைகளால்மனிதர்களுக்குஏற்படும்பாதிப்புகள்

முன்மொழியப்பட்ட சுரங்கத்தின் காரணமாக தொழில்சார் ஆபத்து தோண்டுதல், வெடித்தல், அகழ்வு மற்றும் போக்குவரத்து காரணமாக இருக்கலாம். மொத்தம் 43 தொழிலாளர்கள் சுரங்க நடவடிக்கையில் ஈடுபடுவார்கள். சுரங்கச் செயல்பாடு பின்வரும் சுரங்கத் தொழிலாளர்களுக்கு பல்வேறு உடல்நலப் பிரச்சினைகளை ஏற்படுத்தலாம்:

- துளையிடுதல், கல் வெட்டுதல், அளவு மற்றும் போக்குவரத்து ஆகியவற்றின் போது உருவாகும் தூசி சிலிக்கோசிஸ், ஆஸ்துமா, காசநோய் மற்றும் பிற சுவாச நுரையீரல் கோளாறுகள் போன்ற உடல்நலப் பிரச்சினைகளை ஏற்படுத்தலாம்.
- தொழிலாளர்கள் அதிக எடை தூக்குவதால் கை, கால்கள் மற்றும் முதுகில் காயங்கள் ஏற்படலாம்.
- சுரங்க நடவடிக்கையின் போது ஏற்படும் சத்தம் சத்தம் தூண்டப்பட்ட செவித்திறன் இழப்பை (NIHL) ஏற்படுத்தலாம்.

அட்டவணை 4.5 பல்வேறு சுரங்க நடவடிக்கைகளால் மனிதர்களுக்கு ஏற்படும் பாதிப்புகள்

வ.எண்.	செயல்பாட்டின் வகை	தாக்கம்
1	துளையிடுதல் மற்றும் வெடிப்பதால் தூசி உருவாகிறது	தூசியின் தொடர்ச்சியான வெளிப்பாடு நிமோனியா, காசநோய், வாத மூட்டுவலி மற்றும் பிரிவு அதிர்வுகளை ஏற்படுத்துகிறது
2	துளையிடுதல் மற்றும் வெடிப்பதால் சத்தம் உருவாக்கம்	தூக்கமின்மை, உயர் இரத்த அழுத்தம் மற்றும் இதய நோய்கள் ஆகியவை குறுகிய கால பாதிப்பாக இருக்கும் .நீண்ட கால வெளிப்பாடு பகுதி அல்லது நிரந்தர காது கேளாமைக்கு வழிவகுக்கும்
3	எதிர்பாராத விபத்துகள்	முறையற்ற சுரங்க முறைகளால் ஈ பாறைகள், விரிசல்கள் அல்லது பிளவுகள் ஆகியவை அபாயங்களில் அடங்கும்

தணிப்புநடவடிக்கைகள்

- சுரங்கத் தொழிலாளிக்கு தூசி உள்ளிழுப்பதைக் குறைக்க டஸ்ட் மாஸ்க் வழங்கப்படும்.
- ஒரு நாளைக்கு இரண்டு முறை தண்ணீர் தெளிப்பது, கனிமம் எடுத்து செல்லும் சாலைகள், அருகில் உள்ள குவாரி குழி மற்றும் சாலைகளில் தப்பிக்கும் தூசி உமிழ்வைக் குறைக்க நடைமுறையில் உள்ளது.
- வெட் டிரில்லிங் மற்றும் டஸ்ட் எக்ஸ்ட்ராக்டர் மூலம் துளையிடுதல் பயிற்சி செய்யப்படும்.
- இரைச்சல் அதிகம் உள்ள பகுதியில் பணிபுரியும் தொழிலாளர்களுக்கு காது மப்ஸ் வழங்கப்படும்.
- சுரங்கத் தளம் முதலுதவி வசதிகளுடன் வழங்கப்படும் மற்றும் முழு சுரங்கத் தொழிலாளர்களும் அதை அணுகலாம்.
- சுரங்கத் தொழிலாளர்களுக்கு சுரங்க நடவடிக்கைகளில் பாதுகாப்பு நடைமுறைகள் பற்றி நன்கு பயிற்சி அளிக்கப்படும்.
- சுரங்க விதிகள், 1955 இன் படி, பணியாளர்களின் ஆரம்ப நிலை மற்றும் குறிப்பிட்ட கால இடைவெளியில், திட்ட ஆதரவாளரால் வழங்கப்பட்ட தகுதி வாய்ந்த மருத்துவ அதிகாரிகள் குழுவால் மருத்துவ பரிசோதனை செய்யப்படும்.
- அருகிலுள்ள கிராமப்புற மக்களில் தொழில்சார்ந்த நோய்கள் மற்றும் சிறு நோய்களைக் கண்டறிவதற்காக வழக்கமான மருத்துவ பரிசோதனை முகாம்கள் ஏற்பாடு செய்யப்படும்.
- அவர்களின் கடுமையான மற்றும் நாள்பட்ட நோய்க்கான சிகிச்சைக்கான இலவச பரிசோதனை மற்றும் மருந்து குத்தகைதாரரால் வழங்கப்படும். டிஜிஎம்எஸ் படி அவ்வப்போது மருத்துவ பரிசோதனை நடத்துதல்.
- சுரங்க அலுவலகத்தில் அனைத்து முதலுதவி பெட்டிகளும் கிடைக்கச் செய்தல்.
- தீயை அணைக்கும் கருவியை இடத்தில் வைத்திருத்தல்.
- எதிர்பாராத நிகழ்வுகளை எவ்வாறு கையாள்வது என்பது குறித்து ஊழியர்களுக்குக் கற்பித்தல்.
- சுரங்க அலுவலகத்தில் அவசரத் தொடர்பு எண்கள் அடங்கிய தகவலை இடுகையிடுதல்.
- இந்த அனைத்து நடவடிக்கைகளையும் மேற்கொள்வதன் மூலம், குவாரியில் பணிபுரியும் ஊழியர்களின் பாதுகாப்பு உறுதி செய்யப்படும்.

4.5.5 கழிவு மேலாண்மை

திடக் கழிவுகள்

தோண்டியெடுக்கப்பட்ட முழுப் பொருட்களும் பயன்படுத்தப்படுவதால், இந்தத் திட்டத்தில் திடக்கழிவு உற்பத்தி இருக்காது. இருப்பினும், நிர்வாக நடவடிக்கைகளில் இருந்து உருவாகும் திடக்கழிவுகள் (MSW) முறையாக சேகரிக்கப்பட்டு, அரசிடம் அகற்றப்படும். அங்கீகரிக்கப்பட்ட யார்டுகள் / மறு சுழற்சிகள் / அகற்றுபவர்கள்.

திரவக் கழிவுகள்

இந்த சுரங்கத்தில் இருந்து வெளியேற்றும் செயல்முறை எதுவும் இல்லை. அதனால் திரவக் கழிவுகள் உருவாகாது. கழிவு நீர் அதாவது 1.0 KLD செப்டிக் டேங்க் வழியாக வெளியேற்றப்படும்.

அபாயகரமான கழிவுமேலாண்மை

இந்த திட்டத்தில் பின்வரும் மேலாண்மை நடைமுறைகள் பின்பற்றப்படும்:

குவாரி செயல்பாட்டில், அபாயகரமான கழிவுகளின் ஆதாரம் இயந்திர பராமரிப்பு நடவடிக்கைகளான கழிவு எண்ணெய்/ கழிவு லூப்ரிகண்டுகள் / பயன்படுத்திய வடிகட்டிகள் / பயன்படுத்தப்பட்ட ஹைட்ராலிக் பொருள்கள். கூறப்படும் அபாயகரமான கழிவுகள் மிகக் குறைந்த அளவே உள்ளன, அவை மூல மட்டத்தில் முறையாக சேகரிக்கப்பட்டு, ஊடுருவாத சேமிப்புக் கூடங்களில் சேமிக்கப்பட்டு, அபாயகரமான கழிவு (எல்லை தாண்டிய இயக்கம்) மேலாண்மை விதிகள், 2016 இன் படி அகற்றப்படும்.

பிளாஸ்டிக்கழிவுகள்

பிளாஸ்டிக் பொருட்களின் பயன்பாட்டை தடை செய்வது தொடர்பாக GO(Ms)No.84 இன் படி தமிழ்நாடு அரசு வழிகாட்டுதலின்படி தளத்தில் ஒருமுறை பயன்படுத்தும் பிளாஸ்டிக் மற்றும் தூக்கி எறியப்படும் பிளாஸ்டிக்குகள் தடைசெய்யப்படும். மக்கும் பொருள் அல்லது மீண்டும் பயன்படுத்தக்கூடிய பொருட்களைப் பயன்படுத்த ஊழியர்கள் ஊக்குவிக்கப்படுவார்கள்.

*****

அத்தியாயம் - 5

மாற்றுகளின் பகுப்பாய்வு (தொழில்நுட்பம் மற்றும் தளம்)

5.1 மாற்று தொழில் நுட்பம்.

சுரங்கத் தொழில்நுட்பமானது தொழில்நுட்பத்தில் எந்த மாற்றமும் இல்லாமல் ஒற்றை-ஷிப்ட் செயல்பாட்டில் இயந்திரமயமாக்கப்பட்டது. டிஜிஎம்எஸ் விதிமுறைகளின்படி மேற்கொள்ளப்படும். மாற்று தொழில்நுட்பம் பயன்படுத்தப்படாது. பயன்படுத்தப்படும் தொழில்நுட்பத்தின் விவரங்கள் அத்தியாயம் 2 இல் கொடுக்கப்பட்டுள்ளன.

5.2 ஒவ்வொரு மாற்றின் பாதகமான தாக்கங்களின் சுருக்கம்.

திட்ட ஆதரவாளர், தமிழ்நாடு சிறு கனிமச் சலுகை விதிகள், 1959 விதி19, 41 & 42 இன் கீழ் சுரங்கத் திட்டத்தைத் தயாரித்துள்ளார், மேலும் இதற்கு விழுப்புரம் புவியியல் மற்றும் சுரங்கத் துறை உதவி இயக்குநரால் Rc.No. A/G&M/96/2021 தேதி 06.03.2024 மூலம் ஒப்புதல் அளிக்கப்பட்டுள்ளது.

5.3 முன்மொழியப்பட்ட தடுப்பு நடவடிக்கைக்கான மாற்று தொழில் நுட்பம்.

சுரங்கத் தொழில்நுட்பமானது, தொழில்நுட்பத்தில் எந்த மாற்றமும் இல்லாமல் ஒற்றை-ஷிப்ட் செயல்பாட்டில் திறந்தவெளி இயந்திரமயமாக்கப்பட்டது. டிஜிஎம்எஸ் விதிமுறைகளின்படி குவாரி நவடிக்கைகள் மேற்கொள்ளப்படும். மாற்று தொழில்நுட்பம் பயன்படுத்தப்படாது. பயன்படுத்தப்படும் தொழில்நுட்பத்தின் விவரங்கள் அத்தியாயம் II இல் கொடுக்கப்பட்டுள்ளன.

5.4 மாற்று தளம்.

சுரங்கத் திட்டங்களுக்கு மாற்று இடத்தைத் தேர்ந்தெடுப்பது அவசியமில்லை, ஏனெனில் சுரங்கமானது குறிப்பிட்ட தளம் மற்றும் சுரங்கம் மேற்கொள்ளப்படும் பகுதி கனிம இருப்பு போதுமானதாக நிரூபிக்கப்பட்டுள்ளது. டெபாசிட் அணுகல் மற்றும் மேம்பாட்டிற்கான நல்ல உள்கட்டமைப்பு வசதிகளையும் கொண்டுள்ளது.

சுரங்கத் தொழில்நுட்பமானது, தொழில்நுட்பத்தில் எந்த மாற்றமும் இல்லாமல் ஒற்றை-ஷிப்ட் செயல்பாட்டில் திறந்தவெளி இயந்திரமயமாக்கப்பட்டது. டிஜிஎம்எஸ் விதிமுறைகளின்படி குவாரி பணி மேற்கொள்ளப்படும். மாற்று தொழில்நுட்பம் பயன்படுத்தப்படாது. பயன்படுத்தப்படும் தொழில்நுட்பத்தின் விவரங்கள் அத்தியாயம் II இல் கொடுக்கப்பட்டுள்ளன.

*****

அத்தியாயம் - 6

சுற்றுச் சூழல் கண்காணிப்பு திட்டம்

6.1 தணிப்பு நடவடிக்கைகளின் செயல்திறனைக் கண்காணிப்பதற்கான தொழில்நுட்ப அம்சங்கள் (அளவீடுகள், முறைகள், அதிர்வெண் இருப்பிடத் தரவு பகுப்பாய்வு, அட்டவணைப்படுத்தப்பட்ட அறிக்கைகள் ரசீது அட்டவணைகள்)

6.1.1. சுற்றுச்சூழல் கண்காணிப்பு

செயல்படுத்தப்பட்ட கட்டுப்பாட்டு நடவடிக்கைகளின் செயல்திறனை அளவிட கண்காணிப்பு செய்யப்படுகிறது. திட்டச் செயல்பாட்டின் போது சுற்றுச்சூழலின் நிலையை மதிப்பிடுவதற்கு காற்று, நீர், சத்தம் மற்றும் மண் சூழல்கள் போன்ற பல்வேறு சுற்றுச்சூழல் அளவுருக்களின் வழக்கமான கண்காணிப்பு தேவைப்படுகிறது.
திட்டத்தின் செயல்பாட்டின் போது பல்வேறு அளவுருக்களை கண்காணிக்க காலவரிசையுடன் ஒரு அட்டவணை வடிவமைக்கப்பட்டுள்ளது. MoEF & CC மற்றும் தமிழ்நாடு மாநில மாசுக்கட்டுப்பாட்டு வாரியத்தின் அடிப்படையில் அட்டவணை வடிவமைக்கப்பட்டுள்ளது. SEIAA/TNPCB/MoEF&CC அல்லது பிற சட்டப்பூர்வ அமைப்புகள் ஏதேனும் கூடுதல் அளவுரு/காரணியின் கண்காணிப்பைக் கோரினால், அதுவும் செய்யப்படும்.
முன்மொழியப்பட்ட குவாரி ஒரு சிறிய குவாரி ஆகும். எனவே சுற்றுச்சூழல் தொடர்பான நடவடிக்கைகளுக்கு சுரங்கப் பொறுப்பாளர் பொறுப்பேற்க வேண்டும். தேர்தல் ஆணையத்தைப் பெற்ற பிறகு, தேர்தல் ஆணையத்தில் குறிப்பிடப்பட்டுள்ள நிபந்தனைகள் கண்டிப்பாகப் பின்பற்றப்படும். நிபந்தனைகளை நடைமுறைப்படுத்துவதற்கு சுரங்கப் பொறுப்பாளர் பொறுப்பேற்க வேண்டும். EC இணக்க அறிக்கையும் அவ்வப்போது சமர்ப்பிக்கப்படும்.

6.1.2 சுற்றுச்சூழல் கண்காணிப்பின் நோக்கங்கள்

சுற்றுச்சூழல் கண்காணிப்பின் நோக்கங்கள் பின்வருமாறு.

- காற்று மற்றும் நீர் மாதிரிகளை கண்காணித்தல் மற்றும் பகுப்பாய்வு செய்தல்.
- கட்டுப்பாடு மற்றும் பாதுகாப்பு நடவடிக்கைகளை செயல்படுத்துதல்.
- திட்டம் மற்றும் வெளி நிறுவனங்களுடன் சுற்றுச்சூழல் தொடர்பான செயல்பாடுகளை ஒருங்கிணைத்தல் .சுற்றியுள்ள கிராமங்களில் உள்ள தொழிலாளர்களின் சுகாதாரம் மற்றும் மக்கள் தொகை பற்றிய புள்ளிவிவரங்களை சேகரித்தல் .பசுமை பட்டை மேம்பாடு போன்றவை.
- சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தின் செயல்பாட்டின் முன்னேற்றத்தைக் கண்காணித்தல்.
- திட்டப் பகுதிகளிலும் அதைச் சுற்றியுள்ள பகுதிகளிலும் ஒலி உருவாக்கத்தைக் கண்காணித்தல்.

- கழிவு நீர் சுத்திகரிப்பு மற்றும் திடக்கழிவுகளை அகற்றுவதை கண்காணித்தல்.
- பல்வேறு சுற்றுச்சூழல் மாசுபாடுகளுக்கான மாதிரி/பரிசோதனைக்கு ஆய்வகம் பொருத்தமானதாக இருக்கும்.

6.1.3 சுற்றுச்சூழல் கண்காணிப்பு அட்டவணை

சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தின் செயல்திறனை மதிப்பிடுவதற்கு, முக்கியமான சுற்றுச்சூழல் அளவுருக்கள் தொடர்ந்து கண்காணிக்கப்படும். வெவ்வேறு அளவுருக்கள் கண்காணிப்பின் அதிர்வெண் அட்டவணை 6.1 இல் கொடுக்கப்பட்டுள்ளது.

அட்டவணை 6.1 சுற்றுச்சூழல் கண்காணிப்பு

வரிசை எண்	சுற்றுச்சூழல் பண்பு	கண்காணிக்க வேண்டிய அளவுருக்கள்	கண்காணிப்பு இடங்கள்
1	காற்று	SPM, PM-10, PM-2.5, SO2 மற்றும் NOx க்கான காற்றின் தரம்	24 மணி நேர சராசரி மாதிரிகள் 3 மாதங்களுக்கு ஒரு முறை
2	நீர்	பொது, உடல் மற்றும் இரசாயன அளவுருக்கள்	பருவத்திற்கு ஒரு முறை
3	சத்தம்	Leq, Lmax, Lmin, Leq Day & Leq Night dB(A)	8 மணி நேர சராசரி மாதிரிகள் 3 மாதங்களுக்கு ஒருமுறை.
4	நிலம்	உடல் மற்றும் வேதியியல் பண்புகள்	பருவத்திற்கு ஒரு முறை

6.1.4 இடம்

மேலே குறிப்பிடப்பட்ட சுற்றுச்சூழல் அளவுருக்கள் கண்காணிப்பு பொருத்தமான மற்றும் உணர்திறன் பகுதிகளில் செய்யப்படும். கண்காணிப்பின் சரியான இடம் படம் - 3.5, 3.11, 3.13& 3.14 என கொடுக்கப்பட்டுள்ளது.

6.1.5 அளவீட்டுமுறை

(a) சுற்றுப்புறகாற்றின்தரம்

சுற்றுப்புற காற்றின் தரம் SO2, NOx, PM10 மற்றும் PM2.5 ஆகியவற்றிற்கு கண்காணிக்கப்படும். அதிக அளவு காற்று மாதிரிகள் மற்றும் சுவாச தூசி மாதிரிகள் போன்ற கருவிகள் இந்த நோக்கத்திற்காக பயன்படுத்தப்படும். இந்த அளவுருக்கள் முன்பு கண்காணிப்பு அட்டவணையில் குறிப்பிடப்பட்டபடி கண்காணிக்கப்படும்.

(b) நீரின்தரம்

நீரின் தர பகுப்பாய்வு காலாண்டுக்கு ஒருமுறை செய்யப்படும் மற்றும் கண்காணிக்கப்படும் அளவுருக்களில் SPCB அவ்வப்போது குறிப்பிடும் pH, வெப்பநிலை, TDS போன்றவை அடங்கும்.

(c) இரைச்சல் கண்காணிப்பு

பணிச்சூழலில் சத்தம் அளவு கண்காணிக்கப்படும், முக்கியமாக எல்லை மற்றும் சுரங்கப் பகுதியைச் சுற்றியுள்ள சத்தத்தை உருவாக்கும் ஆதாரங்கள்.

(d) பசுமை மண்டலம் மற்றும் காடுகள் நிறைந்த பகுதிகள்

மரக்கன்றுகளின் செயல்திறன் மற்றும் உயிர்வாழும் விகிதத்திற்காக பசுமை பட்டையின் தொடர்ச்சியான கண்காணிப்பு மற்றும் கண்காணிப்பு செய்யப்படும். வாட்ச் மற்றும் வார்டு பணியாளர்கள் தோட்டத்தை முறையாக பாதுகாப்பார்கள். உரம் இடுவதற்கும், நீர் பாய்ச்சுவதற்கும் கால அட்டவணையில் ஏற்பாடு செய்யப்படும்.

(e) சமூக-பொருளாதாரம்

அத்தியாயம்-3 இல் மைய மற்றும் இடையக மண்டலத்தின் சமூக-பொருளாதார விவரங்கள் விவரிக்கப்பட்டுள்ளன.

6.1.6 தணிப்பு நடவடிக்கைகளின் செயல்திறனைக் கண்காணிப்பதற்கான தொழில்நுட்ப அம்சங்கள்;

மேற்கண்ட கண்காணிப்பு அட்டவணை அவ்வப்போது பின்பற்றப்படும். தரவுகளை சேகரித்த பிறகு, பெறப்பட்ட தரவுகளை சுரங்கப் பொறுப்பாளர் ஆய்வு செய்வார். இவ்வாறு பெறப்பட்ட தரவுகள் பிராந்திய அலுவலகமான MoEF&CCக்கு சமர்ப்பிக்கப்பட்ட EC இணக்க அறிக்கையில் இணைக்கப்படும். அளவீட்டு முறைகள் CPCB/BIS/MoEF&CC/DGMS விதிமுறைகளின்படி இருக்கும்.

6.1.7 அவசரகால நடைமுறைகள்

சுற்றுச்சூழல் நிலைமைகள் காரணமாக ஏதேனும் அவசரநிலை ஏற்பட்டால், சுரங்கப் பொறுப்பாளர் உடனடியாக உயர்மட்ட நிர்வாகத்திடம் புகாரளிப்பார் மற்றும் MoEF&CC/ SPCB/ DGMS விதிமுறைகளின்படி அவசரகால பதிலளிப்பு நெறிமுறை செயல்படுத்தப்படும்.

6.1.8 உருவாக்கப்பட வேண்டிய அறிக்கைகள்

போதுமான சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தை உருவாக்கும் வகையில், திட்ட ஆதரவாளர் ஒவ்வொரு சோதனையின் பதிவுகளையும் அதன் விளக்கத்தையும் பராமரிப்பார். திட்ட ஆதரவாளரால் பராமரிக்க திட்டமிடப்பட்ட பதிவுகளின் தொகுப்பு கீழே அட்டவணை 6.2 இல் கொடுக்கப்பட்டுள்ளது.

அட்டவணை 6.2 PP ஆல் பராமரிக்கப்பட வேண்டிய முக்கியமான பதிவுகள்	
வ.எண்.	**விவரங்கள்**
1	காற்று, நீர்மற்றும்மண்ணுக்கானகண்காணிப்புமுடிவுகள்.
2	சரிவுதோல்வி, நிலஅரிப்புமற்றும்வடிகால்பற்றியபதிவுகள்.
3	தோட்டபதிவுகள்
4	சுற்றுச்சூழல்மற்றும்தொடர்புடையதரநிலைகள்/விதிமுறைகள்
5	சட்டரீதியானஒப்புதல்கள், ஒப்புதல்கள்தொடர்பானபதிவுகள்.
6	காலமுறைமருத்துவபரிசோதனை) PME) பதிவுகள்.
7	புகார்பதிவு) சுற்றுச்சூழல்மாசுபாடு(
8	நீர்மற்றும்மின்சாரநுகர்வுபற்றியபதிவுகள்
9	குறிப்பிட்டகாலமுன்னேற்றபதிவுகள்.
10	சுற்றுச்சூழல்செலவுகள்பதிவுகள்

6.1.9 விரிவான பட்ஜெட் மற்றும் கொள்முதல் அட்டவணைகள்

சுற்றுச்சூழல் கண்காணிப்புக்கு திட்டமிடப்பட்ட பட்ஜெட் கீழே கொடுக்கப்பட்டுள்ளது.

அட்டவணை6.3 – சுற்றுச்சூழல் மேலாண்மை திட்ட செலவு

வ.எண்	செலவுதிட்டமிடப்பட்டுள்ளது	மூலதனசெலவுதொகை (INR)	தொடர்செலவு/ ஆண்டு தொகை (INR)
1	காற்றின் தரமாதிரி	13,28,000	14,490,00
2	சத்தம் கண்காணிப்பு	50,000	22,410,00
3	நீர்தர மாதிரி	2,48,000	2,45,000
4	EC, சுரங்கத் திட்டம் & DGMS நிபந்தனையை செயல்படுத்துதல்	19,55,000	12,87,00
5	காடுவளர்ப்பு	6,20,000	72,000
	கூடுதல்முக்கியEMP செலவுகள்	90,57,000	1,60,000
மொத்தம்		**132,58,000**/-	**54,54,000**

******

அத்தியாயம்-7

கூடுதல் படிப்புகள்

இந்த EIA / EMP அறிக்கைக்கான கூடுதல் ஆய்வுகள் செய்யப்பட்டன அதன் அறிகைகள் பின்வருமாறு,

1. பொது கலந்தாய்வு

2. இடர் மதிப்பீடு

3. சமூக தாக்க மதிப்பீடு, R&R செயல் திட்டங்கள்

4. ஒட்டுமொத்த சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆய்வு

5. ஒரு விளக்கமான ஹைட்ரோஜியாலஜிக்கல் ஆய்வு

6. சாய்வு நிலைதன்மை திட்டம்

7.1 பொது ஆலோசனை.

இந்த வரைவு EIA/EMP அறிக்கையானது, பொது விசாரணை நடைமுறைகளை நடத்துவதற்கான திட்டமிடப்பட்ட தேதி மற்றும் நேரத்தை இரண்டு உள்ளூர் செய்தித்தாள்களில் 30 நாட்களுக்கு முன் அறிவித்த பிறகு, மாவட்ட ஆட்சியர் மற்றும் மாநில மாசுக்கட்டுப்பாட்டு வாரிய அதிகாரிகள் மூலம் கட்டாய நடைமுறைகளின்படி பொது ஆலோசனைக்கு வெளிப்படுத்தப்படும். பொது விசாரணையின் போது பங்குதாரர்களின் கருத்துக்கள், கவலைகள் மற்றும் ஆட்சேபனைகள் பதிவு செய்யப்படும். அனைத்து பொது வினவல்களும், திட்ட முன்மொழிபவர் மற்றும் சம்பந்தப்பட்ட அதிகாரிகளின் கேள்விக்கான பதில்களும் பதிவு செய்யப்பட்டு, தமிழ்நாடு SEIAA இன் ஒப்புதலுக்காக இறுதி EIA/EMP அறிக்கையில் இணைக்கப்படும்.

7.2 இடர் மதிப்பீடு & மேலாண்மை.

(a)நோக்கங்கள்

இடர் மதிப்பீடு என்பது சுரங்க நடவடிக்கைகளின் போது ஏற்படக்கூடிய சாத்தியமான அச்சுறுத்தல்கள்/அபாயங்கள் அடையாளம் காணப்பட்ட ஒரு முறையாகும், இதனால் போதுமான இயந்திரங்கள்/உபகரணங்கள் முன்னெச்சரிக்கையாக கிடைக்கின்றன. சுற்றுச்சூழல் இடர் மதிப்பீட்டின் குறிக்கோள்கள் பின்வருவனவற்றால் நிர்வகிக்கப்படுகின்றன, இது இயற்கை பேரழிவுகளை தவிர்த்து:

- தற்செயலான நிகழ்வுகளின் நிகழ்தகவைக் குறைக்க தேவையான வடிவமைப்பு பாதுகாப்பு நடவடிக்கைகளை மேற்கொள்ளும் வகையில் அபாயகரமான பகுதிகளைக் கண்டறிதல்.
- நிறுவல்களின் சரியான வடிவமைப்பு மற்றும் அதன் கட்டுப்படுத்தப்பட்ட செயல்பாட்டின் மூலம் தடுக்கக்கூடிய சுற்றுச்சூழல் பேரழிவின் சாத்தியமான பகுதிகளை அடையாளம் காணுதல்.
- அவசரகால சூழ்நிலை அல்லது பேரழிவு நிகழ்வு ஏதேனும் இருந்தால், சுரங்க நடவடிக்கையில் இருந்து நிர்வகிக்க.

சுரங்க நடவடிக்கைகளுடன் தொடர்புடைய முக்கிய ஆபத்துகள் பின்வருமாறு

- குவாரி பெஞ்ச் சாய்வு தோல்வி
- குவாரி ஓரங்கள் விழுந்ததால் விபத்து
- இயந்திரங்களால் ஏற்படும் விபத்து
- வெடிபொருட்களால் விபத்து
- பெரிய கற்கள் வெட்டுதல், பிரித்தல் மற்றும் ஏற்றும்போது ஆகியவற்றால் ஏற்படும் விபத்து

பொதுவான அபாயங்கள் சில அடையாளம் காணப்பட்டு, அதற்கான முன்னெச்சரிக்கை நடவடிக்கைகள் வரைவு செய்யப்பட்டுள்ளன.

அட்டவணை 7.1 ஆபத்துகள் மற்றும் முன்னெச்சரிக்கை நடவடிக்கைகள்

வ.எண்	ஆபத்து	முன்னெச்சரிக்கை நடவடிக்கைகள்
1	தீ	சுரங்க அலுவலகம் மற்றும் வெடிபொருள் சேமிப்பு அறை ஆகியவற்றில் தீயை அடக்கும் கருவிகள் கிடைக்கும்.
2	வெடிப்பு	கட்டுப்படுத்தப்பட்ட வெடிப்பு செய்யப்படும் . பறை வெடிப்பின் போது டிஜிஎம்எஸ் விதிமுறைகள் கண்டிப்பாக பின்பற்றப்படும். பயிற்சி பெற்ற நிபுணர்களால் மட்டுமே வெடிப்பு செய்யப்படும்.
3	இரசாயனங்கள் அல்லது அபாயகரமான பொருட்களின் எரிப்பு	எரியக்கூடிய பொருட்கள் அனைத்து முன்னெச்சரிக்கை நடவடிக்கைகளுடன் சேமிக்கப்படுகின்றன. தீயை அடக்கும் கருவி சேமிப்பு தளத்தில் கிடைக்கிறது
4	நிலச்சரிவு	DGMS பரிந்துரைத்தபடி அகலம், உயரம் மற்றும் சாய்வு பராமரிக்கப்படும்
5	கையாளும் போது விபத்துக்கள்	அனைத்து வாகனங்களும் முறையாக பராமரிக்கப்படும். ஓவர்லோடிங் செய்யப்படாது. பயிற்சி பெற்ற/சான்றளிக்கப்பட்ட நபர்கள் மட்டுமே பணியமர்த்தப்படுவார்கள்.
6	மனிதர்கள் அல்லது விலங்குகளின் தற்செயலான வீழ்ச்சி	குத்தகை பகுதியில் முறையாக வேலி அமைக்கப்படும். சுரங்கங்களில் பணிபுரிபவர்கள் மட்டுமே உள்ளே செல்ல அனுமதிக்கப்படுவார்கள்.

7.3 சமூக தாக்க மதிப்பீடு (ஆர் & ஆர்) செயல் திட்டம்

அப்பகுதியில் வசிக்கும் மக்களிடம் இருந்து நிலம் கையகப்படுத்தப்படவில்லை. குத்தகை பகுதி மக்கள் வசிக்காத நிலம். R & R திட்டம் எதுவும் முன்மொழியப் படவில்லை.

7.3.1 ஒட்டுமொத்த சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆய்வு

அட்டவணை – 7.2 கிளஸ்டர் சுரங்க விவரங்கள்					
வ. எண்	பெயர் மற்றும் முகவரி	கிராமம் & வட்டம்	புலஎண்	அளவு (Ha)	குத்தகை காலம்
முடிவுற்ற குவாரிகள்					
	இல்லை				
	நடைமுறையில் உள்ள குவாரிகள்				
1	திரு.N.கோபிநாத், த/பெ. நடராஜன், எண்.19, நாட்டாமைகாரர் தெரு, பொலம்பாக்கம் கிராமம், செய்யூர் கிராமம், காஞ்சிபுரம் மாவட்டம்	நல்முக்கல் &, மரக்காணம்	33/5, 37/3, 37/4, 37/5, 37/6 , 37/7	3.35.0	21.03.2022 to 20.03.2027
2	திரு.D.துரை, த/பெ.தனபால் கவுண்டர், கீழருங்குணம் கிராமம், பெருமுக்கல் அஞ்சல், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்.	நல்முக்கல் &, மரக்காணம்	26/1B1, 27/3A, 27/3B	1.20.0	06.12.2022 to 05.12.2027
3	திரு.V.ரவிச்சந்திரன், த/பெ.வரதராஜ் கவுண்டர், எண்.63/19, பெருமுக்கல் கிராமம் & அஞ்சல், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்.	நல்முக்கல் &, மரக்காணம்	26/1B1, 27/3A, 27/3B	1.35.0	29.12.2022 to 28.12.2027
முன்மொழியப்பட்ட குவாரிகள்					
1	திரு.V.நாகராஜன், த/பெ.வரதராஜ் கவுண்டர், எண். 65, மரக்காணம் ரோடு, பெருமுக்கல் கிராமம், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம்-604301	நல்முக்கல் & மரக்காணம்	34/1B1, 35/2B, 35/3 மற்றும் 35/4	4.75.0	முன் மொழியப் பட்ட குவாரி

7.3.2 க்ளஸ்டருக்கான காற்றின் தர தாக்கம் கணிப்பு

AERMOD வளிமண்டல சிதறல் மாடலிங் (AERMOD கிளவுட் ரிமோட் பதிப்பு) கிளஸ்டர் பகுதிக்கான அதிகரிக்கும் தரை மட்ட செறிவு (GLC) மதிப்பீட்டிற்கு பயன்படுத்தப்படுகிறது. ஈரமான துளையிடுதல் மற்றும் கிளஸ்டர் சுரங்கங்களை ஏற்றுதல் ஆகியவற்றைக் கருத்தில் கொண்டு பகுதி மூல மாதிரி கருத்தில் கொள்ளப்பட்டது. மேலும் லைன் சோர்ஸ் மாடல், ஹால் ரோடு வழியாகப் போக்குவரத்திற்குக் கருத்தில் கொள்ளப்பட்டது. மார்ச் 2024 ஆம் ஆண்டுக்கான அடிப்படை வானிலை ஆய்வுகள் நடத்தப்பட்டன. பின்வரும் ஆதாரங்கள் கருதப்படுகின்றன

இந்த முன்மொழியப்பட்ட குவாரிகளின் ஒட்டுமொத்த தாக்கம் ஆய்வு செய்யப்பட்டு விவரங்கள் அத்தியாயம் IV இல் கொடுக்கப்பட்டுள்ளன.

உமிழ்வு ஆதாரங்கள் மற்றும் கிளஸ்டர் பகுதியின் அளவு.

திரு.V.நாகராஜன் இன் முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரியிலிருந்து உமிழ்வுகளின் பல்வேறு புள்ளி மற்றும் புள்ளி அல்லாத ஆதாரங்கள், அளவிடப்பட்டு கீழே கொடுக்கப்பட்டுள்ளது:

பகுதி உமிழ்வுகள் – மொத்தப் பொருள் கையாளுதல் திரு.V.நாகராஜன்
(சாதாரணகல் மற்றும் கிராவல்)

அளவு, கன மீட்டர்	சாதாரண கல் : 8,89,700 மீ^{3} கிராவல்: 96,210 மீ^{3}
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
செயல்பாட்டு விகிதம், t/hr.	396.41362
தூசி உமிழ்வு, g/t.	0.16
தூசி உமிழ்வு, g /hr.	51.41276
செல்வாக்கு பகுதி, எம்2	625
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m2	0.0000143626
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m2	0.000001436263
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m2	0.0000095750

பகுதி உமிழ்வுகள் - மொத்தப் பொருள் கையாளுதல்
(கிளஸ்டர் சாதாரணகல் மற்றும் கிராவல்)

அளவு, கன மீட்டர்	**தற்போதுள்ள குவாரிகள்:** • திரு. ரவிச்சந்திரன் குவாரி (பரப்பு – 1.35 ஹெக்டேர்) - சாதாரண கல் (1,02,475 மீ3) & கிராவல் குவாரி (6328 மீ3). • திரு. துரை குவாரி (பரப்பு – 1.85.00 ஹெக்டேர்)- சாதாரண கல் (1,87,420 மீ3) & கிராவல் குவாரி (24616 மீ3). • திரு.கோபிநாத் குவாரி (பரப்பு – 3.35.0 ஹெக்டேர்)- சாதாரண கல் (6,22,300 மீ3) & கிராவல் குவாரி (53148 மீ3).
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
செயல்பாட்டு விகிதம், t/hr.	390.2151
தூசி உமிழ்வு, g/t.	0.20
தூசி உமிழ்வு, g /hr.	57.638785
செல்வாக்கு பகுதி, எம்2	625
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m2	0.00072569
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m2	0.000725690
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m2	0.0000483793

வரி ஆதாரம் – குழியிலிருந்து எல்லை வரை சாதாரணகல் மற்றும் கிராவல் போக்குவரத்து

அளவு, கனமீட்டர்	சாதாரண கல் : 8,89,700m^3 கிராவல்: 96,210m^3
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
ஒவ்வொரு டம்பரின் கொள்ளளவு (டி)	10
டிப்பர்களின் மொத்த எண்ணிக்கை/வருடம்	19718
முன்னணி நீளம்/பயணம், கிமீ	0.16
மொத்த VKT/நாள்	63947
உமிழ்வு Kg/VKT	0.25
மொத்த உமிழ்வு கிலோ/ஆண்டு	18314.02
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m	2.39377
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m	0. 239377
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m	0.14013

வரி ஆதாரம் - குழியிலிருந்து எல்லைக்கு சாதாரணகல் மற்றும் கிராவல் போக்குவரத்து

அளவு, கனமீட்டர்	**தற்போதுள்ள குவாரிகள்:** • திரு. ரவிச்சந்திரன் குவாரி (பரப்பு – 1.35 ஹெக்டேர்) - சாதாரண கல் (1,02,475 மீ3) & கிராவல் குவாரி (6328 மீ3). • திரு. துரை குவாரி (பரப்பு – 1.85.00 ஹெக்டேர்)- சாதாரண கல் (1,87,420 மீ3) & கிராவல் குவாரி (24616 மீ3). • திரு.கோபிநாத் குவாரி (பரப்பு – 3.35.0 ஹெக்டேர்)- சாதாரண கல் (6,22,300 மீ3) & கிராவல் குவாரி (53148 மீ3).
வருடத்திற்கு செயல்பாட்டு நேரம்	2400
ஒவ்வொரு டம்பரின் கொள்ளளவு (டி)	10
டிப்பர்களின் மொத்த எண்ணிக்கை/வருடம்	99628
முன்னணி நீளம்/பயணம், கிமீ	0.9
மொத்த VKT/நாள்	11200
உமிழ்வு Kg/VKT	0.24
மொத்த உமிழ்வு கிலோ/ஆண்டு	224561
கட்டுப்பாடற்ற உமிழ்வு விகிதம் g/s/m	1209484
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM10 g/s/m	0.1209484
கட்டுப்படுத்தப்பட்ட உமிழ்வு விகிதம், PM2.5 g/s/m	0.0354143

குறிப்பு: *2 மீ/வி காற்றின் வேகம் மற்றும் 10% ஈரப்பதத்தின் அடிப்படையில் உமிழ்வு காரணி கணக்கிடப்படுகிறது. + உமிழ்வு காரணி 10%

படம் 7.1 PM 2.5 க்கான GLC கணிப்பு ஐசோப்லெத்

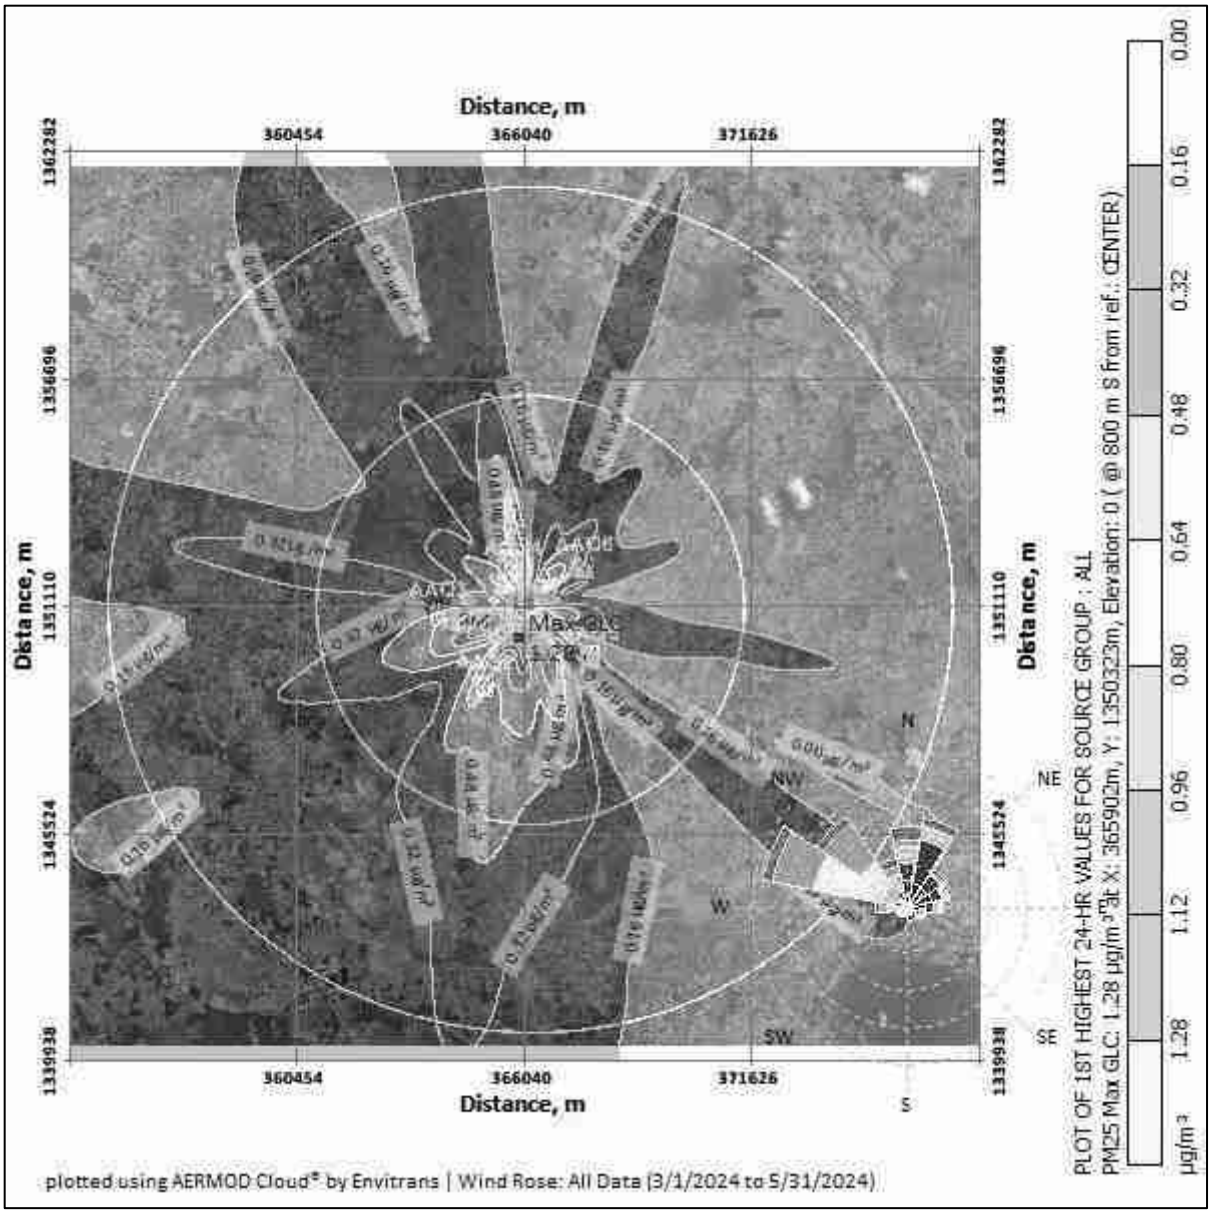

படம் 7.2 PM10 க்கான GLC கணிப்பு ஐசோப்லெத்

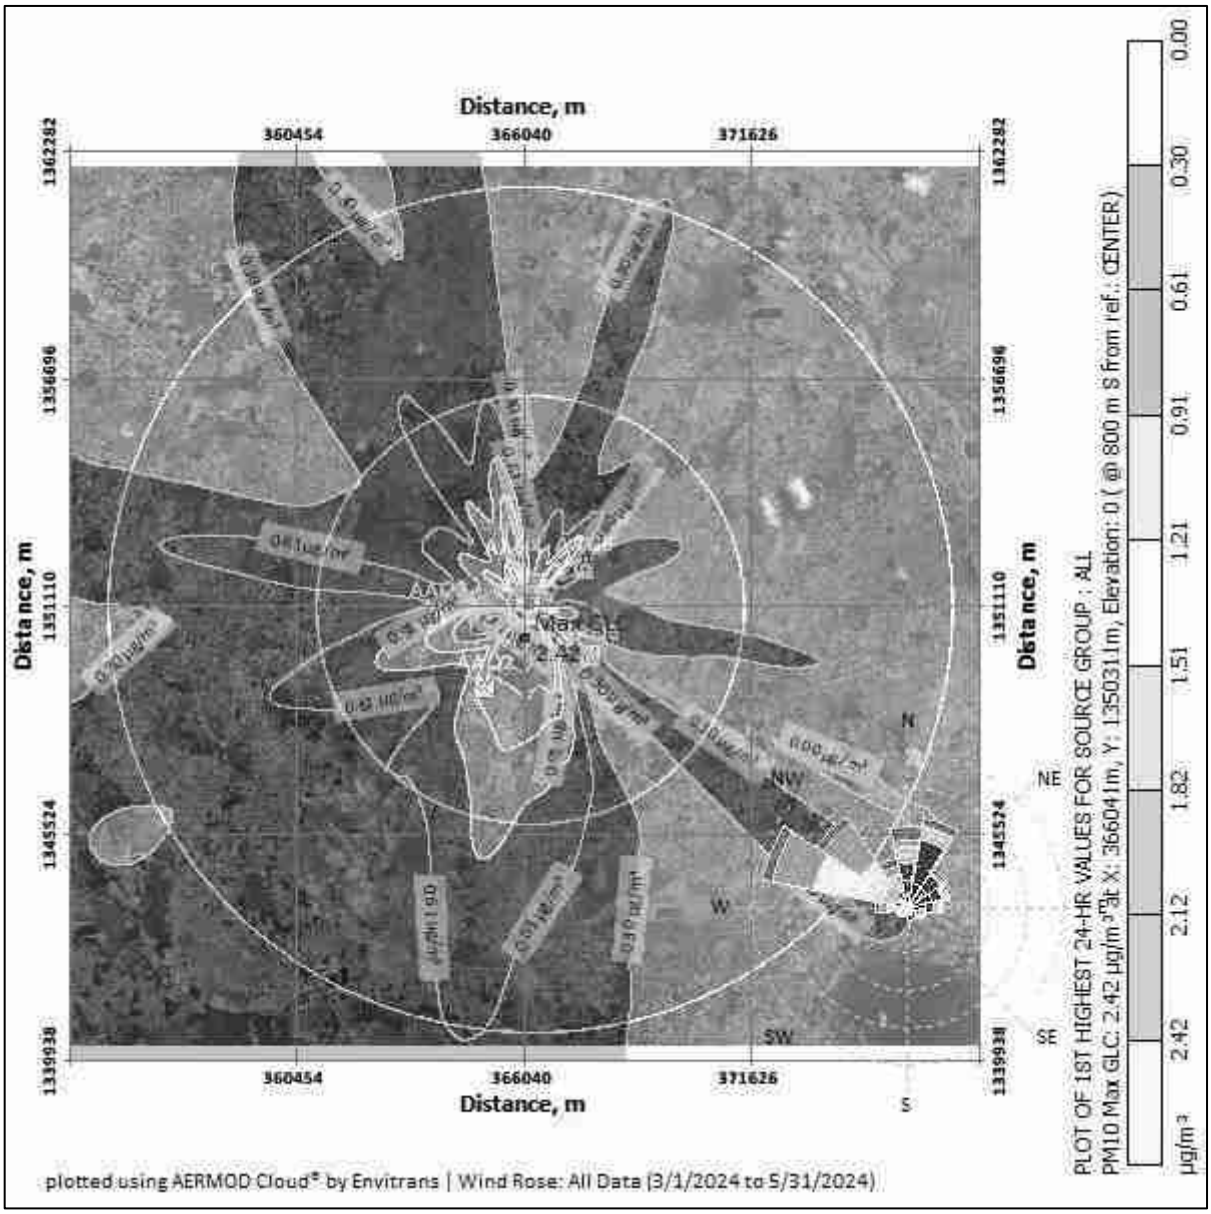

படம் 7.3 GLC முன்கணிப்பின் ஐசோப்லெத் - PM2.5க்கான ஒட்டுமொத்த

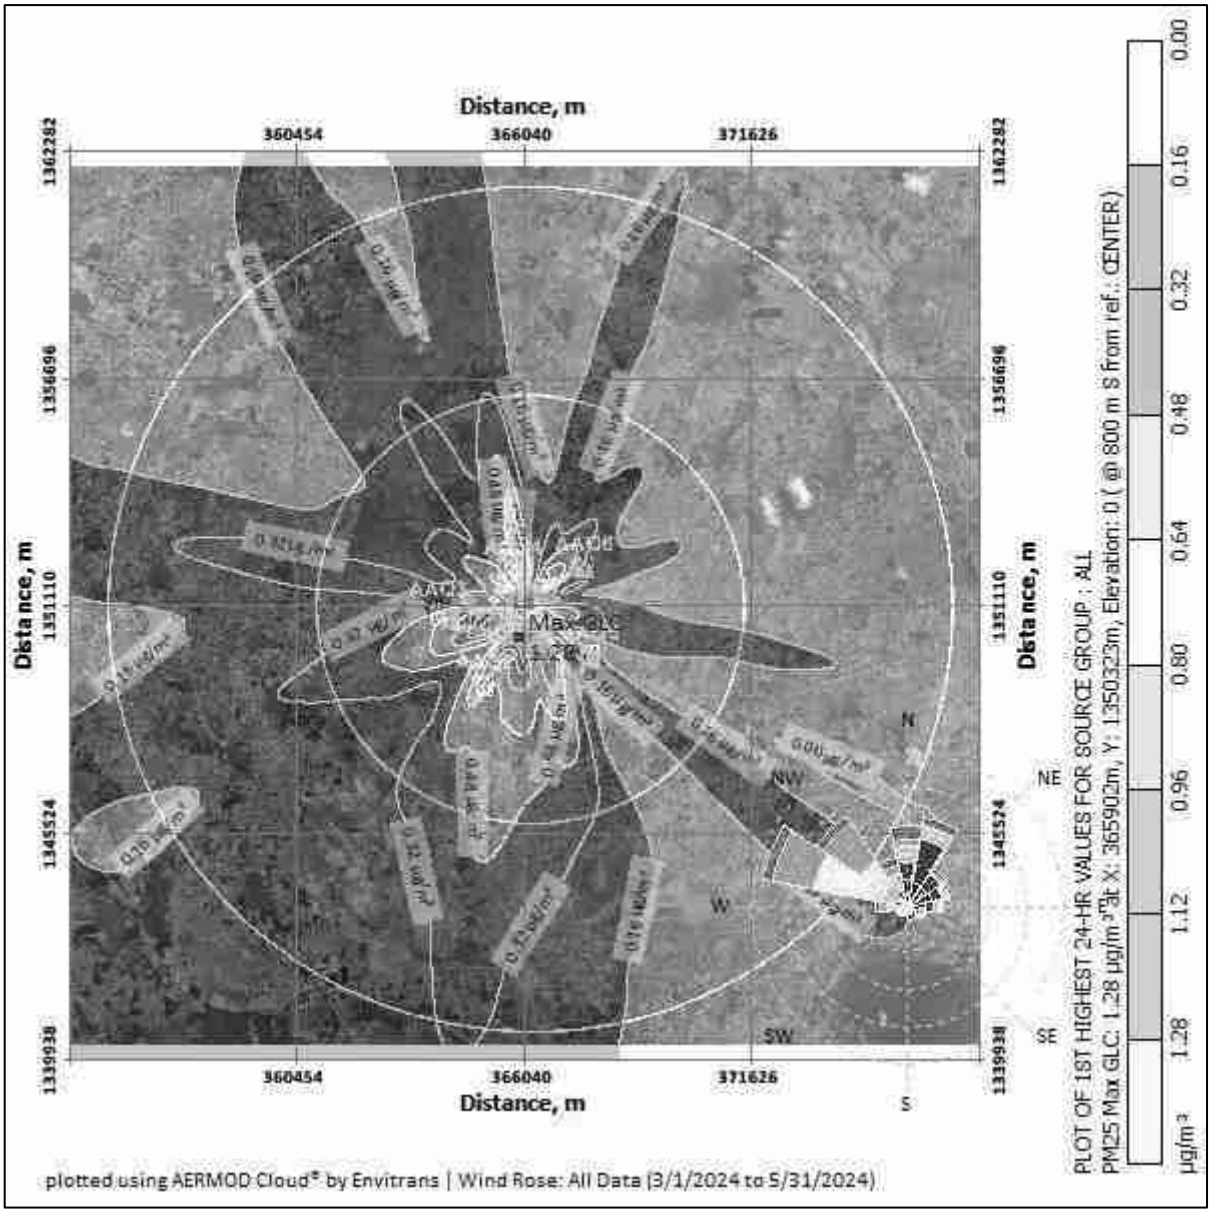

படம் 7.4GLC முன்கணிப்பின் ஐசோப்லெத்–PM10 க்கான ஒட்டுமொத்த

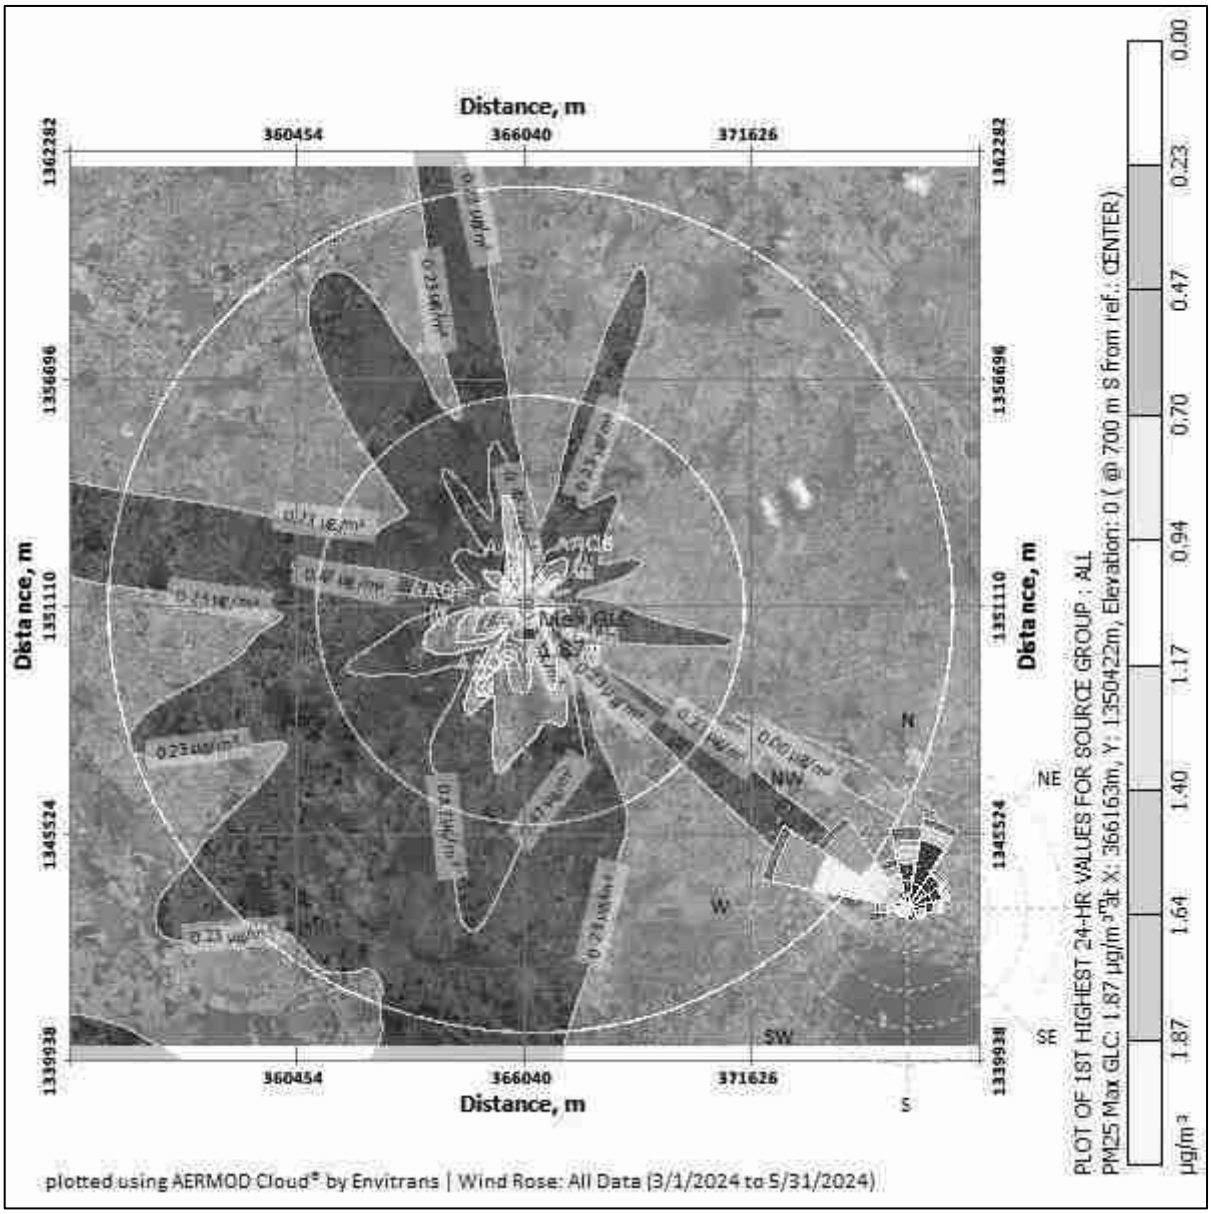

கணிக்கப்பட்ட சுற்றுப்புற காற்றின்தரம்:

பிஎம்10, பிஎம்2.5, (ஜிஎல்சி) (அடிப்படைக்கோடு + அதிகரிப்பு) ஆகியவற்றின் பிந்தைய திட்ட செறிவுகள், தேவையான கட்டுப்பாட்டு நடவடிக்கைகளை எடுத்த பிறகு அட்டவணை எண் - 7.3 இல்கொடுக்கப்பட்டுள்ளது.

அட்டவணை 7.3 திட்டம் செயல் படுத்தப்பட்ட பிறகு PM2.5 செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	25.75	1.28	27.03	60
2	நல்முக்கல்	24.30	1.12	25.42	
3	சீனலூர்	21.34	0.96	22.3	
4	குன்னபாக்கம்	20.87	0.80	21.67	
5	ஏந்தூர்	22.15	0.48	22.63	
6	தென்னம்பூண்டி	22.40	0.32	22.72	
அட்டவணை 7.3.a திட்ட அமலாக்கத்திற்குப் பிறகு PM2.5 இன் கிளஸ்டர் செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	25.75	1.87	27.62	60
2	நல்முக்கல்	24.30	1.64	25.95	
3	சீனலூர்	21.34	1.40	22.74	
4	குன்னபாக்கம்	20.87	1.17	22.04	
5	ஏந்தூர்	22.15	0.94	23.09	
6	தென்னம்பூண்டி	22.40	0.70	23.10	
அட்டவணை 7.4.a திட்டம் செயல் படுத்தப்பட்ட பிறகு PM210 செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	54.25	2.42	56.67	100
2	நல்முக்கல்	48.65	2.12	50.77	
3	சீனலூர்	43.70	1.82	45.52	
4	குன்னபாக்கம்	46.40	1.51	47.91	
5	ஏந்தூர்	44.75	1.21	45.96	
6	தென்னம்பூண்டி	47.85	0.61	48.46	

அட்டவணை 7.4.b திட்ட அமலாக்கத்திற்குப் பிறகு PM10 இன் கிளஸ்டர் செறிவுகள்					
வ. எண்	இடம்	பின்னணி செறிவு	கணிக்கப் பட்ட அதிகரிக்கும் செறிவு	பிந்தைய திட்ட செறிவு	சட்டப்பூர்வ வரம்புகள் µg/m3
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	54.25	3.20	57.45	100
2	நல்முக்கல்	48.65	2.80	51.45	
3	சீனலூர்	43.70	2.00	45.70	
4	குன்னபாக்கம்	46.40	1.60	48.00	
5	ஏந்தூர்	44.75	1.20	45.95	
6	தென்னம்பூண்டி	47.85	0.80	48.65	

மேலே உள்ள அறிக்கை, மோசமான சூழ்நிலையிலும் கூட, அடிப்படை புள்ளிவிவரங்களுடன் கூடிய செறிவுகள், PM10க்கான சுற்றுப்புற காற்றின் தரத்தின் மதிப்புகள் 45.52 µg/m3 முதல் 56.67 µg/m3 வரையிலும், PM2.5க்கு வரம்பிலும் இருப்பதைக் காட்டுகிறது. 21.67 µg/m3 முதல் 27.03 µg/m3 வரையிலும், PM10 என்பது 45.70 µg/m3 முதல் 57.45 µg/m3 வரையிலும், PM2.5 க்கு 21.67 µg/m3 µg/m3 வரை 27 வரையிலும் உள்ளது. ஒவ்வொரு வழக்கிலும் சட்ட வரம்புகளுக்குள் உள்ளன. காற்று மாசுபாட்டைக் கட்டுப்படுத்த சுரங்கத்தில் மேற்கொள்ளப்பட்ட தணிப்பு நடவடிக்கைகள் கீழே கொடுக்கப்பட்டுள்ளன.

- துளையிடும் செயல்பாட்டில் ஈரமான துளையிடுதல் நடைமுறைப் படுத்தப்படும்.
- கனிமம் எடுத்து செல்லும் சாலைகள் மற்றும் ஏற்றுதல் போன்றவற்றில் தண்ணீர் தெளித்தல் செய்யப்படும்.
- சுரங்கத் தொழிலாளர்களுக்கு தூசி முகமூடிகள் வழங்கப்படுகின்றன.
- பாதுகாப்பு வலயத்தில் மூன்று அடுக்கு தோட்டம்.

உற்பத்தியாளரின் விவரக் குறிப்புகளின் படி DG தொகுப்புகள் அவ்வப்போது பராமரிக்கப்படும்.

போக்குவரத்தால் ஏற்படும் ஒட்டுமொத்த தாக்கம்

வெட்டியெடுக்கப்பட்ட கனிமங்கள் டிரக்குகள் மூலம் நுகர்வோருக்கு மற்றும் க்ரஷர் யூனிட்கள் போன்ற பல்வேறு அளவுகளில் கற்களை உற்பத்தி செய்வதற்கு அல்லது சாலைகள், பாலங்கள், கட்டிடங்கள் மற்றும் பிற வாங்குபவர்கள் போன்றவற்றை நிர்மாணிப்பதற்காக கொண்டு செல்லப்படும். இவற்றில் இருந்து கனிமங்களை கொண்டு செல்வதால் போக்குவரத்தில் ஏற்படும் ஒட்டுமொத்த பாதிப்பு. இரண்டு குத்தகைகள் கீழே கொடுக்கப்பட்டுள்ளன

அட்டவணை 7. 5- போக்குவரத்தில் தாக்கம்

குவாரி	சாதாரண கல் உற்பத்தி ஒருநாளுக்கு (டன்)	ஒரு நாளைக்கு லாரி லோடு எண்ணிக்கை
P1 (முன்மொழியப்பட்ட குவாரி)	657	65
P2 (கிளஸ்டர் குவாரி)	3320	332
மொத்தம்		**397**

முன்மொழியப்பட்ட திட்டங்கள் ஒரு நாளைக்கு 397 பயணங்களைக் கொண்டுவரும். இந்த திட்டத்தின் காரணமாக தற்போதுள்ள சாலை இந்த கூடுதல் போக்குவரத்தை ஏற்றுகொள்ளும். சாலையை முறையாகப் பராமரித்தல், கனிமம் ஏற்றிச் செல்லும் லாரியை தார்ப்பாய் கொண்டு மூடுதல், தண்ணீர் தெளித்தல் போன்ற பல்வேறு நடவடிக்கையால் பாதகமான பாதிப்புகள் ஏற்படாமல் இருப்பதை உறுதிசெய்யும்.

7.3.3 ஹைட்ரோஜியாலஜிக்கல் ஆய்வு

வடபெண்ணையாறு 10.9 கிமீ தொலைவில் தென்கிழக்கில் பகுதியில் அமைந்துள்ளது. இந்த நீர்நிலைகள் அருகிலேயே இருப்பதால், விரிவான நீர்நிலை ஆய்வு மேற்கொள்ளப்பட்டது. சுரங்கததிட்டம் தயார் செய்ய தொடர்பு கடிதத்தில் பரிந்துரைக்கப்பட்டுள்ளபடி, அருகிலுள்ள பட்டா நிலத்திற்கு 7.5மீ பாதுகாப்பு தூரம் கடபிடிக்கபட்டுள்ளது.

7.3.4 சாய்வு நிலைத்தன்மை ஆய்வு

முன்மொழியப்பட்ட குவாரி மிகவும் சிறிய குவாரி மற்றும் உற்பத்தியும் குறைவாக உள்ளது. 5 மீட்டர் உயரம் மற்றும் பெஞ்ச் அகலம் 5 மீட்டர் மற்றும் 45° மொத்தசாய்வுடன் திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்கம் முன்மொழியப்பட்டது. சுரங்கத்தின் ஆழம் 38 மீ (BGL) ஆக முன்மொழியப்பட்டது, இது இறுதி குழி வரம்பு ஆகும். மேலும், அதில் கழிவு எதுவும் இல்லை, ஏனெனில் தோண்டியெடுக்கப்பட்ட முழுப் பொருட்களும் பயன்படுத்தப்படும்.

தொழில்நுட்ப காரணிகளைப் பொறுத்தவரை, பின்வரும் முன்னெச்சரிக்கை நடவடிக்கைகள் எடுக்கப்படும்:

- DGMS விதிமுறைகளை கண்டிப்பாக கடைபிடித்தல்.
- சுரங்கப் பொறுப்பாளர்.சுரங்க மேலாளரால் அடிக்கடி ஆய்வு/
- பெஞ்ச் உயரம், அகலம், சாய்வு ஆகியவை DGMS விதிமுறைகளின்படி இருக்கும்.

7.3.5 பேரிடர் மேலாண்மை திட்டம்

சுரங்கங்களில் சரியான தடுப்பு வழிமுறை ஏற்கனவே உள்ளது.

- முன்னெச்சரிக்கை நடவடிக்கைகள் அனைத்து ஊழியர்களுக்கும் சுரங்கப் பொறுப்பாளரால் நன்கு விளக்கப்பட்டுள்ளன.
- அனைத்து ஊழியர்களுக்கும் தேவையான PPE குவாரியில் உள்ளது. PPE இல்லாமல் யாரும் உள்ளே நுழைய அனுமதிக்கப்படவில்லை. சாதகமற்ற சுற்றுச்சூழல் நிலைமைகளின் போது குவாரிகளைத் தவிர்த்தல்.
- DGMS நெறிமுறைகளைப் பின்பற்றி பாதுகாப்பான வெடிப்பை மேற்கொள்வது.
- தீயை அணைக்கும் கருவி, முதலுதவி பெட்டி போன்ற பாதுகாப்பு உபகரணங்கள் சுரங்கத்தில் உள்ளன.
- சுரங்கத்திற்கு பயன்படுத்தப்படும் இயந்திரங்களை முறையான பராமரிப்பு.
- ஏதேனும் அவசரநிலை ஏற்பட்டால், சுரங்கப் பொறுப்பாளர், சுரங்க மேலாளர், நிர்வாகத் தொடர்பு ஆகியோரின் தொடர்பு எண்கள் சுரங்க அலுவலகத்தில் கிடைக்கும்.

7.3.6 சுரங்க மூடல் திட்டம்

குவாரி செயல்பாடு 38 மீ (BGL) ஆழம் வரை முன்மொழியப்பட்டது. இறுதி குழி அளவு 227 மீ நீளம் x 170 மீ அகலம் x 38 மீ ஆழம் BGL இருக்கும். குவாரி பணி முடிந்ததும், வெட்டப்பட்ட குழி மழை நீர் சேகரிப்பு குளமாக விடப்படும். குவாரி சுற்றி முள்வேலி முறையாக அமைக்கப்படும்.

*****

அத்தியாயம் -8

திட்டபலன்கள்

அறிமுகம்

திரு.V.நாகராஜன் அவர்களின் முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் தோண்டுவதற்கு திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்கமுறையாகும். இந்தத்திட்டம் தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் 4.75.0 ஹெக்டேர் பரப்பளவில் உள்ள புல எண்கள்; 34/1B1, 35/2B, 35/3 மற்றும் 35/4 கொண்டது ஆகும்

திட்ட நன்மைகள்

திட்டத்தின் பலன்கள் கீழ்க்கண்டவாறு பல்வேறு வழிகளில் கூறப்படுகின்றன:

- சுற்றுச்சூழல் நன்மைகள்.
- வேலை வாய்ப்பு: திறமையான, & திறமையற்ற வேலையாள்.
- பொருளாதார பலன்கள்.
- சமூக நன்மைகள்.

8.1. உள்கட்டமைப்பில் மேம்பாடுகள்.

திட்டப் பகுதி பட்டா நிலத்தில் அமைந்துள்ளது, இதனால் விவசாயம் அல்லது வன நிலம் இழப்புக்கு எந்த பாதிப்பும் ஏற்படாது. இத்திட்டம் இப்பகுதியில் வேலை வாய்ப்புகளை உருவாக்கும். மக்களின் சமூகப் பொருளாதார நிலையில் சுரங்கத்தால் எந்தப் பாதகமான விளைவும் இருக்காது; மாறாக, சுரங்க நடவடிக்கைகள் அவர்களின் வாழ்க்கைத் தரத்தை மேம்படுத்தும். சுரங்க நடவடிக்கை உள்ளூர் மக்களுக்கு வேலை வாய்ப்புகளை உருவாக்குகிறது, இது நிச்சயமாக அவர்களின் பொருளாதார நிலையை உயர்த்துகிறது. இப்பகுதியின் உள்ளூர் மக்களுக்கு இத்திட்டத்தின் ஒட்டுமொத்த நன்மையான தாக்கத்தைத் தவிர, சுற்றுச்சூழல் மற்றும் சுற்றுச்சூழலுக்கான அக்கறை உட்பட கல்வி, சுகாதாரம் மற்றும் சமூக விழிப்புணர்வு ஆகிய துறைகளில் வசதிகளை அதிகரிப்பது அவசியம் என உணரப்படுகிறது.

8.2 சமூக உள்கட்டமைப்பில் மேம்பாடுகள்.

முன்மொழியப்பட்ட திட்டம் நேரடி அல்லது மறைமுக வேலைவாய்ப்புகளை உருவாக்குவதன் மூலம் அருகிலுள்ள கிராமங்களின் சமூக-பொருளாதார நிலையை மேம்படுத்த உதவும். கணிசமான அளவு மறைமுக வருவாயானது போக்குவரத்து நடவடிக்கைகளால் வேலைவாய்ப்புடன் உருவாக்கப்படும் எ.கா. உழைப்பு, உதவியாளர் போன்றவை.

பொருளாதார நன்மைகள்:

முன்மொழியப்பட்ட சுரங்கத்தை செயல்படுத்துவது உள்ளூர் மக்களுக்கு நேரடி மற்றும் மறைமுக வேலைகளை உருவாக்குவதன் மூலம் அப்பகுதியின் பொருளாதாரத்தை உயர்த்தும். பொருளாதாரத்தில் திட்டத்தின் நேர்மறையான ஒட்டுமொத்த தாக்கம் இருக்கும்.

8.3 வேலை வாய்ப்பு: திறமையான, & திறமையற்ற வேலையாள்.

திரு.V.நாகராஜன் இன் முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் சுரங்க நடவடிக்கை. 26 உள்ளூர் மக்களுக்கு நேரடி வேலை வாய்ப்பை உருவாக்கும். MOEF & CC அறிவிப்பின்படி, 8 லச்சம் CERஇக்கு செலவு செயப்படும். அது தகுதியான அதிகாரியிடமிருந்து பெறப்பட்ட CER கடிதத்தின்படி செலவு செய்யப்படும், CER கடிதம் இணைப்பு எண் 13 இல் இணைக்கப்பட்டுள்ளது.

8.4 மற்ற உறுதியான பலன்கள்.

சுரங்க நிர்வாகம், சுரங்கங்களில் உள்ள தேவை மற்றும் உள்ளூர் நபர்களின் தகுதி மற்றும் அனுபவம் ஆகியவற்றைப் பொறுத்து, அருகிலுள்ள கிராமங்களில் இருந்து அரை திறன் மற்றும் திறமையற்ற தகுதியுள்ள தொழிலாளர்களை நியமிக்கும்.

ஒட்டுமொத்த விளைவு உயர்ந்த வாழ்க்கைத் தரத்தை ஏற்படுத்தும். சிறந்த கல்வி, மேம்படுத்தப்பட்ட சுகாதாரம் மற்றும் சுகாதார வசதிகள், வீட்டுவசதி மற்றும் நுகர்வோர் பொருட்களை வாங்குதல். வீடு, போக்குவரத்து, மருத்துவம், கல்வி மற்றும் பிற குடிமை வசதிகள் எதிர்காலத்தில் மேம்படுத்தப்படும். இது ஒரு பெரிய நேர்மறையான நன்மையாக கருதப்படுகிறது.

*****

அத்தியாயம்-9

சுற்றுச்சூழல் செலவு பலன் பகுப்பாய்வு

14 செப்., 2006 தேதியிட்ட திருத்தப்பட்ட EIA அறிவிப்பின்படி, 'சுற்றுச்சூழல் செலவு பலன் பகுப்பாய்வு' ஸ்கோப்பிங் கட்டத்தில் பரிந்துரைக்கப்பட்டால் மட்டுமே பொருந்தும்.

முன்மொழியப்பட்ட திட்டத்திற்கு 16.07.2024 தேதியிட்ட ToR அடையாள எண் TO24B0108TN5964918N (F.No.10951) இல் SEIAA-TN வழங்கிய ToR புள்ளிகளின்படி, 'சுற்றுச்சூழல் செலவு பலன் பகுப்பாய்வு' பரிந்துரைக்கப்படவில்லை.

*****

அத்தியாயம் - 10

சுற்றுச்சூழல் மேலாண்மை திட்டம்

10.1 தணிக்கும் நடவடிக்கைகள் செயல்படுத்தப்படுவதை உறுதிசெய்வதற்கான நிர்வாக அம்சங்களின் விளக்கம் மற்றும் EIA இன் ஒப்புதலுக்குப் பிறகு அவற்றின் செயல்திறன் கண்காணிக்கப்படுகிறது.

10.1.1 நோக்கங்கள்

சுற்றுச்சூழல் மேலாண்மைத் திட்டம் ஒரு திட்டம் சுற்றுச்சூழலுக்கு நிலையான முறையில் செயல்படுத்தப்படுவதை உறுதிசெய்ய உருவாக்கப்பட்டது, அங்கு அனைத்து ஒப்பந்தக்காரர்களும் துணை ஒப்பந்தக்காரர்களும், ஆலோசகர்கள் உட்பட, திட்டத்தால் எழும் சாத்தியமான சுற்றுச்சூழல் அபாயங்களைப் புரிந்துகொண்டு, அந்த அபாயங்களைக் குறைக்க பொருத்தமான நடவடிக்கைகளை எடுக்கிறார்கள். திட்டத்தின் வாழ்க்கைச் சுழற்சியின் போது ஏற்படும் பாதகமான சுற்றுச்சூழல் தாக்கங்களைக் குறைப்பதற்குத் தகுந்த தணிப்பு நடவடிக்கைகளை மேற்கொள்வதன் மூலமும், திட்டமிடப்பட்ட வடிவமைப்பிற்கு இணங்க, திட்டச் செயலாக்கம் மேற்கொள்ளப்படுவதையும் EMP உறுதி செய்கிறது. இந்தச் சுரங்கத் திட்டத்தால் ஏற்படும் பாதிப்புகள் அத்தியாயம் 4 இல் விவரிக்கப்பட்டுள்ளன மற்றும் மூல மட்டத்தில் தணிப்பு நடவடிக்கைகள் மற்றும் தள அளவில் ஒட்டுமொத்த மேலாண்மைத் திட்டம் இந்த அத்தியாயத்தில் விவரிக்கப்பட்டுள்ளது.

10.1.2 EMP இன் அடிப்படை

முன்மொழியப்பட்ட திட்ட நடவடிக்கைகளுக்கான சுற்றுச்சூழல் மேலாண்மைத் திட்டம் பின்வரும் முக்கிய சுற்றுச்சூழல் பிரச்சினைகளைக் கருத்தில் கொண்டு உருவாக்கப்பட்டுள்ளது.

• திட்ட நடவடிக்கைகள்

• சுற்றுச்சூழல் தாக்க மதிப்பீடு பற்றிய ஆய்வுகள்

• காற்று மற்றும் நீர் மாசு கட்டுப்பாடு

• பணிபுரியும் பகுதி சூழல் மேம்பாடு

• தொழில்சார் ஆபத்துகள் & பாதுகாப்பு

• சுற்றுச்சூழல் கண்காணிப்பு வசதிகள்

• சுற்றுச்சூழல் மேலாண்மை செலவுகள்

EMP ஆனது, தணிப்பு நடவடிக்கைகள் மற்றும் கண்காணிப்புத் திட்டங்களின் தாக்கங்களைக் கருத்தில் கொண்டு திட்டத்தின் அனைத்து கட்டங்களையும் உள்ளடக்கியது. சுற்றுச்சூழல் சட்டங்களுக்கு இணங்குவதை உறுதி செய்வதற்கும் பாதகமான தாக்கங்களைக் குறைப்பதற்கும் மேற்கொள்ளப்படும் நடவடிக்கைகளை இந்தத் திட்டம் கோடிட்டுக் காட்டுகிறது. சுரங்கத்தில் செயல்படுத்துவதற்கான EMP நடவடிக்கைகளின் விவரங்கள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 10.1 சுற்றுச்சூழல் மேலாண்மை திட்டம்

சுற்றுச்சூழல் அளவுரு	தணிப்பு நடவடிக்கைகள்
காற்று	துளை இடும் இயந்திரத்தில் இருந்து வெளியேறும் தூசியை அடக்க ஈரமான துளையிடுதல்
	நிலையான தண்ணீர் தெளிப்பான் மூலம் சாலையில் வழக்கமான தண்ணீர் தெளித்தல்.
	4KLD தண்ணீர் தூசியை அடக்க பயன்படுத்தப்படும்.
	அதிக காற்று, இரவு நேரங்கள் மற்றும் வெப்பநிலை தலைகீழ் காலங்களில் வெடிப்பதைத் தவிர்க்கவும்.
	கனிமம் எடுத்து செல்லும் சாலையின் வழக்கமான தரப்படுத்தல்.
	வெளியேற்றும் உமிழ்வுத் தேவைகளுக்கு இணங்க வாகனங்கள் முறையாகப் பராமரிக்கப்படுவது உறுதி செய்யப்படும்
	காற்று மாசுபாட்டைக் குறைக்க சுரங்கங்களில் உள்ள உபகரணங்கள் மற்றும் இயந்திரங்களின் ஆபரேட்டர் கையேட்டின்படி பராமரிப்பு.
	சுரங்க நடவடிக்கைகள் மற்றும் ஏற்றுக்கொள்ளப்பட்ட காற்று மாசுக்கட்டுப்பாட்டு நடவடிக்கைகளின் செயல்திறன் ஆகியவற்றால் ஏற்படும் பாதிப்பை அணுகுவதற்கு சுற்றுப்புற காற்றின் தர கண்காணிப்பு திட்டப் பகுதியிலும் சுற்றியுள்ள கிராமங்களிலும் மேற்கொள்ளப்பட்டது.
	தூசியை கட்டுப்படுத்த காடு(மரம்) வளர்ப்பு.
மேற்பரப்பு நீர்	வடபெண்ணையாறு தென்கிழக்கில் பகுதியில் 10.9 கிமீ தொலைவில் முன்மொழியப்பட்ட குவாரி பகுதியிலிருந்து அமைந்துள்ளது. போதுமான பாதுகாப்பு தூரம் உள்ளது, ஆற்றிலோ அல்லது நீர்நிலையிலோ அல்லது அதன் அருகாமையில் கழிவுகளை கொட்டவோ அல்லது வெளியேற்றவோ கூடாது.
	மழை நீரைச் சேகரிக்க குவாரியைச் சுற்றிலும் நீர்த்தேக்கக் குளத்துடன் இணைக்கப்பட்டிருக்கும் தேவையான நீளமுள்ள மாலை வடிகால் போன்ற மேற்பரப்பு ஓடை மேலாண்மை கட்டமைப்புகள் அமைக்கப்படும்.

நிலத்தடி நீர்	குவாரி செயல்பாடு 38 மீ (BGL) ஆழம் வரை உத்தேசிக்கப்பட்டுள்ளது, நீர்மட்ட அளவு 68 மீ ஆழத்தில் காணப்படுகிறது, எனவே திட்டம் செயல்படுத்தப்படாது. முழு குவாரி காலத்திலும் நிலத்தடி நீர் அட்டவணையை வெட்டுங்கள்.
நீர் நுகர்வு மற்றும் கழிவு நீர் உற்பத்தி	இந்த திட்டத்திற்கு தேவையான தண்ணீர் விற்பனையாளர்களிடம் இருந்து பெறப்படும்.
	1.0 KLD கழிவுநீர் உற்பத்தியானது, ஊறவைக்கும் குழியுடன் கூடிய செப்டிக் டேங்கில் சுத்திகரிக்கப்படும்.
	CPCB ஆல் குறிப்பிடப்பட்ட அளவுருக்களுக்கு நிலத்தடி நீர் மற்றும் மேற்பரப்பு நீர் கண்காணிப்பை மேற்கொள்ளவும்
இரைச்சல்	பணியமர்த்தப்பட்ட தொழிலாளர்களுக்கு பாதுகாப்பு உபகரணங்கள், காதுகுழாய்கள் மற்றும் காது பிளக்குகள் ஆகியவை சுரங்க தளத்தில் உருவாகும் அதிக இரைச்சலில் இருந்து பாதுகாப்பதற்காக தேவைப்படும் இடங்களில் வழங்கப்படுகின்றன.
	இரைச்சல் அளவுகள் உகந்த வெடிக்கும் மின்னேற்றம், சரியான தாமத டெட்டனேட்டர்கள் மற்றும் துளைகள் வெளியே வீசுவதைத் தடுக்க சரியான தண்டு ஆகியவற்றைப் பயன்படுத்தி கட்டுப்படுத்தப்படுகின்றன.
	திட்டப் பகுதியின் பாதுகாப்பு மண்டலம் முழுவதும் (7.5 மீ) அடர்த்தியான பசுமைப் வளையம் உருவாக்கி, இரைச்சலைக் குறைக்கவும், அதுவே பராமரிக்கப்படும்.
	சுரங்க இயந்திரங்களின் தடுப்பு பராமரிப்பு மற்றும் சத்தம் உருவாக்கத்தை கட்டுப்படுத்த தேய்ந்து போன பாகங்கள் மாற்றுதல்.
	சுரங்க நடவடிக்கைகள் மற்றும் ஏற்றுக்கொள்ளப்பட்ட இரைச்சல் கட்டுப்பாட்டு நடவடிக்கைகளின் செயல்திறன் ஆகியவற்றால் ஏற்படும் பாதிப்பை அணுகுவதற்காக திட்டப் பகுதி மற்றும் சுற்றியுள்ள கிராமங்களில் வருடாந்திர சுற்றுப்புற இரைச்சல் நிலை கண்காணிப்பு மேற்கொள்ளப்படுகிறது. கண்காணிப்பின் போது தேவைப்பட்டால் கூடுதல் இரைச்சல் கட்டுப்பாட்டு நடவடிக்கைகள் எடுக்கப்படும்.
தரை அதிர்வு மற்றும் ஃப்ளை ராக் கட்டுப்பாடு	DGMS-ன் பரிந்துரைக்கப்பட்ட தரங்களுக்குள் PPV மதிப்பை நன்கு பராமரிக்க தாமத டெட்டனேட்டர்களைப் பயன்படுத்தி கட்டுப்படுத்தப்பட்ட வெடிப்பு மேற்கொள்ளப்படும்.
	துளையிடுதல் மற்றும் வெடித்தல் ஆகியவை தகுதி வாய்ந்த நபர்களின் மேற்பார்வையின் கீழ் மேற்கொள்ளப்படும்.
	வெடிப்புத் துளைகள் துளையின் ஆழத்திற்குப் போதுமான அளவு தண்டுகள் மற்றும் பொருத்தமான கோணப் பொருட்களால் தண்டு அமைக்கப்பட்டிருப்பது உறுதி செய்யப்படும்.

	சத்தம் அல்லது அதிர்வு கண்காணிப்பை மேற்கொள்ள வேண்டும்.
நிலச் சூழல்	இறுதி நிலையில், சுரங்கக் குழிகள் மழை நீர் சேகரிப்பு குழியாக மாற்றப்படும். மீதமுள்ள பகுதி பசுமை மண்டலமாக மாற்றப்படும்.
	திட்டப் பகுதிக்கு வெளியே கழிவுகள் கொட்டபபட்வில்லை, கனிமம் முழுவதும் விற்கப்படும்.
	சுற்று வட்டார நிலங்கள் பாதிக்கப்படுவதைத் தடுக்க, திட்டப் பகுதியைச் சுற்றிலும் கேட்ச் குழிகள் / குடியேற்றப் பொறிகளுடன் கூடிய மாலை வடிகால்கள் அமைக்கப்பட வேண்டும்.
	திட்டப் பகுதியின் சுற்றளவில் தோட்டங்கள் மூலம் தூசியைத் தடுக்க வேண்டும், இது ஒலித் தடையாகவும் செயல்படும்.
	சுற்றுச்சூழல் கண்காணிப்பு திட்டத்தின்படி அடிக்கடி மண் மற்றும் நிலத்தடி நீர் பரிசோதனை.
மேல் மண் / மேல் மட்ட சுமை	குவாரி செயல்பாட்டின் போது மேல்மட்ட கழிவுகள் ஏதும் இல்லை.
உயிரியல் சூழல்	சுரங்கத்தின் போது, குறிப்பிடப்பட்ட பாதுகாப்பு வலய பகுதிகளில் தோட்டங்கள் மேற்கொள்ளப்படும்.
	மரக்கன்றுகளின் உயிர்வாழ்வைத் தடுக்கும் முக்கிய பண்புக்கூறுகள் தூசி ஆகும், இந்த புழுதியை உண்டாகாமல் இருக்க சாலைகளில் தண்ணீர் தெளிப்பதன் மூலமும், புதிதாக நடப்பட்ட பகுதிக்கு அருகில் ஒரு தெளிப்பான் அலகு நிறுவுவதன் மூலமும் கட்டுப்படுத்தலாம்.
	பசுமைப் வளையம் மேம்பாட்டுத் திட்டம் குறித்த வழக்கமான ஆய்வு.
	அத்தியாயம் III இல் குறிப்பிடப்பட்டுள்ள ஆண்டு வாரியான பசுமைப் வளையம் மேம்பாட்டுத் திட்டம் கண்காணிக்கப்படும்.

10.1.3 நிர்வாகம் மற்றும் தொழில்நுட்ப அமைப்பு

இது மிகச் சிறிய குவாரி என்பதால், சுற்றுச்சூழல் தொடர்பான அனைத்து அம்சங்களையும் சுரங்கப் பொறுப்பாளர் கவனித்துக்கொள்வார். சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தை திறம்பட செயல்படுத்துவதையும், சுரங்க மேலாண்மை நிலை மூலம் சுற்றுச்சூழல் சட்ட விதிகளுக்கு இணங்குவதை உறுதி செய்வதையும் அவர் உறுதி செய்வார். கண்காணிப்புக்கான செயல் திட்டம் பின்வரும் சுற்றுச்சூழல் கூறுகளை கண்காணிப்பதைக் கொண்டுள்ளது.

- நீர்/கழிவு நீரின் தரம், காற்றின் தரம் மற்றும் உருவாக்கப்படும் திடக்கழிவு ஆகியவற்றை கண்காணித்தல்.
- வெளிப்புற ஆய்வகம் மூலம் சேகரிக்கப்பட்ட நீர் மற்றும் காற்று மாதிரிகளின் பகுப்பாய்வு.
- நிதி மதிப்பீடு, வரிசைப்படுத்துதல், காற்று மாசுக்கட்டுப்பாட்டு கருவிகளை நிறுவுதல், கழிவு நீர் சுத்திகரிப்பு நிலையம், போன்றவற்றை உள்ளடக்கிய மாசு கட்டுப்பாடு மற்றும் பாதுகாப்பு நடவடிக்கைகள்/ சாதனங்களை செயல்படுத்துதல் மற்றும் கண்காணித்தல்.
- திட்டத்தினுள் சுற்றுச்சூழலுடன் தொடர்புடைய செயல்பாடுகள் மற்றும் வெளி நிறுவனங்களுடன் ஒருங்கிணைத்தல்.
- சுற்றியுள்ள கிராமங்களில் உள்ள தொழிலாளர்கள் மற்றும் மக்கள்தொகையின் சுகாதார புள்ளிவிவரங்களை சேகரித்தல்.
- பசுமை பட்டை மேம்பாடு.
- சுற்றுச்சூழல் கண்காணிப்பு திட்டத்தின் செயல்பாட்டின் முன்னேற்றத்தை கண்காணித்தல்.
- சட்டப்பூர்வ விதிகள், மாநில மாசுக் கட்டுப்பாட்டு வாரியம், சுற்றுச்சூழல் மற்றும் வன அமைச்சகத்தின் விதிமுறைகள் மற்றும் சுற்றுச்சூழல் அனுமதியின் நிபந்தனைகள் மற்றும் நிறுவுவதற்கான ஒப்புதல்கள் மற்றும் செயல்பட ஒப்புதல் ஆகியவற்றுடன் இணங்குதல்.

படம் 10.1 அமைப்பு விளக்கப்படம்

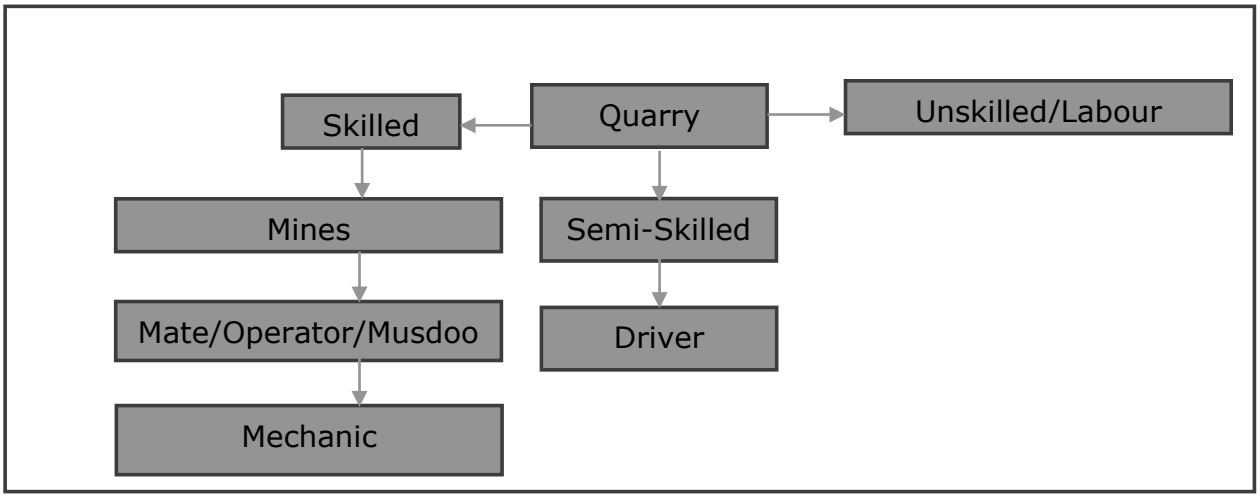

1	திறமையானவர்	சுரங்க மேலாளர்	1
		போர்மன்/ மேட்	3
		ஆபரேடர்	18
		மெகானிக்	1
2	பாதி-திறமையான	ஓட்டுனர்	6
3	திறமைகுன்றிய	வேலையாள்	14
		மொத்தம்	**43 Nos**

10.1.4 சுற்றுச்சூழல் கொள்கை

திட்ட ஆதரவாளர் நன்கு வரையறுக்கப்பட்ட சுற்றுச்சூழல் கொள்கையை வகுத்துள்ளார். சுற்றுச்சூழல் கொள்கை கீழே கொடுக்கப்பட்டுள்ளது.

- சுற்றுச்சூழலை பாதுகாக்கும் நோக்கில் விதிகளும் அர்ப்பணிப்பும் உந்துதல் என்பது திரு.V.நாகராஜன் இன் சாதாரண கல் மற்றும் கிராவல் குவாரியின் சுற்றுச்சூழல் கொள்கை.
- குத்தகைதாரர் இயற்கை வளங்களை, மறுசுழற்சி செய்தல் மற்றும் மறுபயன்பாட்டு முறையின் அடிப்படையில் திறமையாக பயன்படுத்த உறுதி பூண்டுள்ளார்.
- இத்திட்டமானது சாத்தியமான பாதிப்புகளை அடையாளம் காண உறுதிபூண்டுள்ளது மற்றும் பாதிப்புகளை குறைக்க தேவையான நிர்வாக நடவடிக்கைகளை எடுக்கும்.
- சுற்றுச்சூழலின் செயல்திறன் தொடர்ந்து கண்காணிக்கப்பட்டு, நமது சுற்றுச்சூழல் மற்றும் சுகாதார செயல்திறனின் தொடர்ச்சியான முன்னேற்றத்திற்காக அறிக்கையிடப்படும்.

10.1.5 தொழில் பாதுகாப்பு மற்றும் சுகாதார மேலாண்மை

தொழில் பாதுகாப்பு மற்றும் ஆரோக்கியம் ஆகியவை உற்பத்தித்திறன் மற்றும் ஒரு முதலாளி-பணியாளர் உறவுடன் மிக நெருக்கமாக தொடர்புடையவை. குவாரிகளில் தொழில் ஆரோக்கியத்தை பாதிக்கும் முக்கிய காரணிகள் தூசி மற்றும் சத்தம். சுரங்கச் சட்டம் 1952 மற்றும் சுரங்க விதிகள் 1955 இன் விதி 29ன் படி, குவாரிச் செயல்பாடுகளின் போது பணியாளர்களின் பாதுகாப்பு மற்றும் சுரங்க உபகரணங்களைப் பராமரிப்பது கவனிக்கப்படும். தூசி, சத்தம் மற்றும் அதிர்வு காரணமாக தொழிலாளர்களின் ஆரோக்கியத்தில் எந்தவிதமான பாதகமான விளைவுகளையும் தவிர்க்க, போதுமான நடவடிக்கைகள் வழங்கப்பட்டுள்ளன. சுரங்கத்தில் பணிபுரியும் தொழிலாளர்களின் சுகாதார நிலை, தொழில்சார் கண்காணிப்பு திட்டத்தின் கீழ் தொடர்ந்து கண்காணிக்கப்படும். இத்திட்டத்தின் கீழ், அனைத்து ஊழியர்களும் பணியின் போது விரிவான மருத்துவ பரிசோதனைக்கு உட்படுத்தப்படுகிறார்கள். ஊழியர்களின் சேர்க்கைக்கு முன், முன் மருத்துவ பரிசோதனை செய்யப்படுகிறது. மேலும், அனைத்து ஊழியர்களுக்கும் ஆண்டுதோறும் அவ்வப்போது மருத்துவ பரிசோதனை செய்யப்படும்.

10.1.6 சுற்றுச்சூழல் கட்டுப்பாட்டு நடவடிக்கைகளின் செலவு

EMP ஐ திறம்பட செயல்படுத்துவது மாசு குறைப்பது மற்றும் ஒழுங்குமுறை தேவைகளுக்கு இணங்குவது மட்டுமின்றி உற்பத்தித்திறனை அதிகரிப்பது மற்றும் உற்பத்தியின் சந்தைத்தன்மையை மேம்படுத்துவதும் ஆகும். சுரங்கங்களின் தொகுப்பிற்கான EMP இன் மூலதனம் மற்றும் தொடர்ச்சியான செலவுகள் கீழே உள்ள அட்டவணையில் கொடுக்கப்பட்டுள்ளன.

அட்டவணை 10.2 - சுற்றுச்சூழல் மேலாண்மை திட்ட செலவு

வ.எண்	திட்ட செலவு	மூலதன செலவு தொகை (INR)	தொடர் செலவு/ஆண்டு தொகை (INR)
1	காற்றின் தர மாதிரி	13,28,000	14,490,00
2	நீர் தர மாதிரி	50,000	22,410,00
3	சத்தம் கண்காணிப்பு	2,48,000	2,45,000
4	EC, சுரங்கத் திட்டம் & DGMS நிபந்தனையை செயல்படுத்துதல்	19,55,000	12,87,00
5	காடு(மரம்) வளர்ப்பு	6,20,000	72,000
6	கூடுதல் முக்கிய EMP செலவுகள்	90,57,000	1,16,000
மொத்தம்		**132,58,000**/-	**54,54,000**

10.1.7 முடிவு

சுரங்க நடவடிக்கைகளின் பல்வேறு அம்சங்கள் பரிசீலிக்கப்பட்டு, அது தொடர்பான பாதிப்புகள் மதிப்பீடு செய்யப்பட்டன. சுற்றுச்சூழல் பாதிப்புகளை தணிக்க சாத்தியமான அனைத்து வழிகளையும் கருத்தில் கொண்டு, சுற்றுச்சூழல் மேலாண்மைத் திட்டம் தயாரிக்கப்பட்டு 433.95 லட்சம் ரூபாய் ஒதுக்கப்பட்டுள்ளது. EMP மாறும், நெகிழ்வானது மற்றும் அவ்வப்போது மதிப்பாய்வுக்கு உட்பட்டது. முக்கிய சுற்றுச்சூழல் பாதிப்புகள் தொடர்புடைய திட்டங்களுக்கு, EMP வழக்கமான மதிப்பாய்வில் இருக்கும். எனவே, EMP இல் குறிப்பிடப்பட்டுள்ள அனைத்து இலக்குகளையும் நிறைவேற்ற சரியான நடவடிக்கைகள் எடுக்கப்படும், மேலும் திட்டமானது ஆய்வுப் பகுதியில் சாதகமான தாக்கத்தை ஏற்படுத்தும்.

*****

அத்தியாயம் 11

சுருக்கம் மற்றும் முடிவுகள்

11.1 திட்டத்தைச் செயல்படுத்துவதற்கான அனைத்து சாத்திய கூறுகள்.

அறிமுகம்

திரு.V.நாகராஜன் அவர்களின், 4.75.0 ஹெக்டேர் பரப்பளவில் புல எண். 34/1B1, 35/2B, 35/3 மற்றும் 35/4, நல்முக்கல் கிராமம், மரக்காணம் வட்டத்தில், விழுப்புரம் மாவட்டம், தமிழ்நாடு மாநிலம், குவாரி செய்வதற்காக விழுப்புரம் மாவட்ட புவியியல் உதவி இயக்குனர் இருந்து தொடர்பு கடிதத்தைப் பெற்றார், சுரங்கததிட்டம் 8,89,700 கனமீட்டர் சாதாரண கல் மற்றும் 96,210 கனமீட்டர் கிராவல் ஒப்புகொள்ளபட்டது.

EIA அறிவிப்பு, 2006 மற்றும் அதன் அடுத்தடுத்த திருத்தங்களின்படி முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரி. திரு.V.நாகராஜன்" சுரங்கக் குழுவானது EIA அறிவிப்பின் அட்டவணை 1(a) இன் கீழ் வருகிறது மற்றும் அதன் அடுத்தடுத்த திருத்தங்கள் திட்டமானது B1 வகையின் கீழ் வருகிறது. 16.07.2024 தேதியிட்ட ToR அடையாள எண். TO24B0108TN5964918N (F.No.10951) மூலம் திட்டத்தின் EIA/EMP அறிக்கையைத் தயாரிப்பதற்கான ToR அங்கீகரிக்கப்பட்டது. 8,89,700 கனமீட்டர் சாதாரண கல் மற்றும் 96,210 கனமீட்டர் கிராவல் உற்பத்திக்காக அங்கீகரிக்கப்பட்ட TOR இன் படி இந்த அறிக்கை தயாரிக்கப்பட்டுள்ளது.

வ.எண்.	விளக்கம்	நிலை/குறிப்புகள்
1.	துறை	நிலகரி அல்லாதவகை
2.	திட்டத்தின் வகை	B1
3.	முன்மொழியப்பட்ட கனிமம்	சாதரண கல் மற்றும் கிராவல் குவாரி
4.	குவாரி குத்தகை வகை	முன்மொழியப்பட்ட குவாரி
5.	குவாரி குத்தகைஅளவு	4.75.0 Ha
6.	முன்மொழியப்பட்ட ஆழம்	38 மீட்டர் தரைமடடதிற்க்கு கீழ்
7.	சுரங்கமுறை	திறந்தவெளி இயந்திரமக்கபட்ட முறை.
8.	முன்மொழியப்பட்ட காலம்	5 வருடம்
9.	முன்மொழியப்பட்டசுற்றுச்சூழல் அனுமதி	5 வருடம்
10.	முன்மொழியப்பட்ட உற்பத்தி அளவு	சாதாரணகல்: 8,89,700 கன மீட்டர் கிராவல்: 96,210 கன மீட்டர்

முன்மொழியப்பட்ட குத்தகைதாரர். திரு.V.நாகராஜன் என்பவர் சாதாரண கல் மற்றும் கிராவல் குவாரி, துறையில் செயல்பாடு மற்றும் சந்தைப்படுத்தல் போன்றவற்றை அடையாளம் காண்பதில் சிறந்த அனுபவ முள்ளவர். முன்மொழியப்பட்ட திட்ட இடம் பட்டா நிலம், இணைப்புஎண் –6 ஐப்பார்க்கவும்.

11.1.1 திட்டத்தின் இடம்

முன்மொழியப்பட்ட திட்ட இடம், தமிழ்நாடு மாநிலம், விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் அமைந்துள்ளது மற்றும் அதன் அட்சரேகை: 12°13'05.24"N முதல் 12°13'14.52"N வரை மற்றும் தீர்க்கரேகை: 79°46'07.17"E முதல் 79°46'16.18"E வரை உள்ளது. சர்வே ஆஃப் இந்தியா டோபோஷீட் எண். 57 P/16. ஆய்வை நடத்த, முன்மொழியப்பட்ட சுரங்க குத்தகைப் பகுதி (கோர் மண்டலம்) மற்றும் உத்தேச சுரங்கத் தளத்தைச் சுற்றி 10 கிமீ சுற்றளவு (இடைநிலை மண்டலம் என்று அழைக்கப்படும்) தாக்க மண்டலம் ஆகியவை பரிசீலிக்கப்பட்டன. EIA அறிக்கையானது மூன்று மாத அடிப்படைத் தரவை அடிப்படையாகக் கொண்டது (அதாவது மார்ச் 2024 முதல் மே 2024 வரை).

11.1.2 புவியியல்

குத்தகைக்கு எடுக்கப்பட்ட பகுதியில் கவனிக்கப்பட்ட பாறை வகை சார்னோகைட் ஆகும், இதில் பெரும்பாலும் குவார்ட்ஸ் மற்றும் ஃபெல்ட்ஸ்பார் சில ஃபெரோமக்னேசிய கனிமங்கள் உள்ளன. சார்னோகைட் என்பது தீபகற்ப க்னீஸ்ஸின் ஒரு பகுதியாகும், இது உயர்தர உருமாற்ற பாறை ஆகும். சார்னோகைட் தளபோக்கு $N45^0E$ – $S45^0W$ மற்றும் $SE80^0$நோக்கி டிப்பிங் ஆகும்.

11.1.3 திட்ட விளக்கம்

இது திறந்தவெளி இயந்திரமயமாக்கப்பட்ட சுரங்க முறையில் துளையிடுதல் மற்றும் வெடித்தல் மூலம் முன்மொழியப்பட்ட சாதாரண கல் மற்றும் கிராவல் குவாரி ஆகும். குவாரிகள் தரைமட்டத்திற்கு கீழே 38 மீ ஆழம் வரை (5 ஆண்டுகள்). புவியியல் இருப்புக்கள் 21,37,500 கனமீட்டர் சாதாரண கல் மற்றும் கிராவல் 1,42,500 கனமீட்டர் என மதிப்பிடப்பட்டுள்ளது. பாதுகாப்பு தூரம் மற்றும் பெஞ்ச் இழப்பைக் கழிப்பதன் மூலம் கணக்கிடத்தக்க இருப்பு கணக்கிடப்படுகிறது. 10,15,275 கனமீட்டர் சாதாரண கல் மற்றும் 96,210 கனமீட்டர்கிராவல் ஆகும், இது 38 மீ (BGL) ஆழம் வரை 100% மீட்பு விகிதத்தில் மீட்டெடுக்கப்படும் 5 வருட காலத்திற்கு. வழக்கமான திறந்தவெளி இயந்திரமயமாக்கப்பட்ட முறையைப் பயன்படுத்தி 5 மீ பெஞ்ச் உயரம், 5 மீ அகலம் 45^0 டிகிரி மொத்த சாய்வு கொண்ட சாதாரண கல்லை வெட்டி எடுக்க உத்தேசிக்கப்பட்டுள்ளது. குவாரி செயல்பாட்டில் கைதுளைப்பனை கொண்டு துளையிடுதல், வெடித்தல், தோண்டுதல், கல் ஏற்றுதல் மற்றும் போக்குவரத்து ஆகியவை அடங்கும்.

வ. எண்	விளக்கம்	நிலை/குறிப்புகள்
1	துறை	நிலகரி அல்லாத வகை
2	புதிய/ஏற்கனவே உள்ள திட்டம்	புதிய திட்டம்
3	திட்டத்தின் வகை	B1
4	கனிமத்தின் வகை	சிறு கனிமம்
5	குவாரி காலம்	10 வருடம்
6	முன்மொழியப்பட்ட உற்பத்தி அளவு	சாதாரணகல்: 8,89,700கன மீட்டர் கிராவல்: 96,210 கன மீட்டர்
7	கழிவு உற்பத்தி மற்றும் மேலாண்மை	இல்லை
8	பெஞ்ச் உயரம் மற்றும் அகலம்	முன்மொழியப்பட்ட பெஞ்ச் உயரம் மற்றும் அகலம் முறையே 5.0 மீட்டர்
9	இறுதிஆழம்	38 மீட்டர்(தரைமட்டத்திருக்கு கீழ்)
10	இறுதி பயன்பாடு	தோண்டப்பட்ட சாதாரணகல் மற்றும் கிராவல், அரசு மற்றும் பொதுத்துறை திட்டங்களுக்கு கட்டுமானத் தொழில்களுக்குப் பயன்படுத்தப்படுகிறது, மேலும் மாவட்டம் முழுவதும் மற்றும் அதைச்சுற்றியுள்ள வீட்டுவசதி மற்றும் உள்கட்டமைப்புத் திட்டங்களுக்குப் பயன்படுத்தப்படுகிறது.

11.1.4 திட்டத் தேவைகள்

திட்டத்தின் தேவைகள் கீழே கொடுக்கப்பட்டுள்ளன.

வ.எண்	தேவையின் தன்மை	விளக்கம்
1	தண்ணீர் தேவை	மொத்த நீர் தேவை 8 KLD வெளி நிறுவனங்களில் இருந்து வாங்கப்படும். 1.5KLD இல், குடிநீர்த் தேவை 2.5KLD, பசுமைப் மேம்பாடு மற்றும் தூசி அடக்குதல் 4.0. KLD.
2	சக்தி தேவை	சுரங்க நடவடிக்கைகளுக்கு மின்சாரம் தேவையில்லை, அலுவலக தேவைகளுக்கு, அது மாநில கிரிட் மூலம் பூர்த்தி செய்யப்படும்.
3	மனிதவள தேவை	நிரந்தர ஊழியர்கள் - 29, தற்காலிக ஊழியர்கள் - 14
4	நிதி தேவை	AMP இன் படி மொத்த திட்டச் செலவு INR.565.95 ஆக இருக்கும், இதில் செயல்பாட்டு செலவு, நிலையான சொத்து செலவு மற்றும் EMP செலவு ஆகியவை அடங்கும்.
5	சமூக பொருளாதார வளர்ச்சிக்கான நிதி	8.00 லட்சம் ரூபாய் ஒதுக்கப்பட்டுள்ளது. மேலும், பொது விசாரணையின் போது மக்கள் எழுப்பும் எந்தவொரு கோரிக்கையும் நிறைவேற்றப்படும்.

11.1.5 குத்தகைப் பகுதியின் விளக்கம்

ஆய்வு பகுதியில் உள்ள அம்சங்கள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 11.1 குத்தகை பகுதியின் விளக்கம்

வ.எண்	பகுதிகள்	திட்ட தளத்திலிருந்து பகுதிகள் தூரம்
1	சர்வதேச மரபுகளின் கீழ் பாதுகாக்கப்பட்ட பகுதிகள், அவற்றின் சுற்றுச்சூழல், நிலப்பரப்பு, கலாச்சார அல்லது பிற தொடர்புடைய மதிப்புக்கான தேசிய அல்லது உள்ளூர் சட்டங்கள்	15 கிமீ சுற்றளவில் இல்லை
2	சுற்றுச்சூழல் காரணங்களுக்காக முக்கியமான அல்லது உணர்திறன் கொண்ட பகுதிகள்	
A	சதுப்பு நிலங்கள், நீர்நிலைகள் அல்லது பிற நீர்நிலைகள்,	
B	கடலோர மண்டலம், உயிர்க்கோளங்கள்,	10கிமீ சுற்றளவில் இல்லை
C	மலைகள், காடுகள்	கீழ்சேவூர் ஆர்.எஃப் 4.04 - கி.மீ (வடமேற்கு) தொலைவில் உள்ளது, குமலம்பட்டு ஆர்.எஃப் 7.17 கி.மீ (தெற்கு) தொலைவில் அமைந்துள்ளது.

நீர்நிலை	தூரம் (கிலோ மீட்டர்	திசை
ஓடை	230 மீட்டர்	வடகிழக்கு
ஓடை	300 மீட்டர்	வடக்கு
குளம்	230 மீட்டர்	தென்மேற்கு
பிரம்மதேசம் ஏரி	2.2 கி.மீ	தெற்கு
ஏந்தூர் ஏரி	2.53 கி.மீ	தென்கிழக்கு
கீழ்சேவூர் ஏரி	3.40 கி.மீ	வடமேற்கு
புதுப்பாக்கம் ஏரி	3.59 கி.மீ	தென்கிழக்கு
அலங்ககுப்பம் ஏரி	5.03 கி.மீ	கிழக்கு
நொளம்பூர் ஏரி	5.42 கி.மீ	வடமேற்கு
புதுநகர் ஏரி	8.24 கி.மீ	தெற்கு
நல்லாவூர் ஏரி	8.32 கி.மீ	தெற்கு

3	பாதுகாக்கப்பட்ட, முக்கியமான அல்லது உணர்திறன் வாய்ந்த தாவரங்கள் அல்லது விலங்கினங்களால் இனப்பெருக்கம், கூடு கட்டுதல், உணவு தேடுதல், ஓய்வு, குளிர்காலம், இடம்பெயர்வு ஆகியவற்றிற்கு பயன்படுத்தப்படும் பகுதிகள்	15 கிமீ சுற்றளவில் இல்லை
4	உள்நாட்டு, கடலோர, கடல் அல்லது நிலத்தடி நீர்	15 கிமீ சுற்றளவில் இல்லை
5	மாநில, தேசிய எல்லைகள்	15 கிமீ சுற்றளவில் இல்லை
6	சுற்றுலா, யாத்திரைப் பகுதிகளுக்கு பொதுமக்கள் பயன்படுத்தும் வழிகள் அல்லது வசதிகள்	15 கிமீ சுற்றளவில் இல்லை
7	பதுக்கபட்ட படை நிறுவல்கல்	15 கிமீ சுற்றளவில் இல்லை
8	அடர்த்தியான மக்கள்தொகை அல்லது கட்டப்பட்ட பகுதி	திண்டிவனம் – 13.09 கிமீ (மேற்கு).
9	மனிதனால் உருவாக்கப்பட்ட நிலப் பயன்பாடுகளால் ஆக்கிரமிக்கப்பட்ட பகுதிகள் (மருத்துவமனைகள், பள்ளிகள், வழிபாட்டுத் தலங்கள், சமூக வசதிகள்)	திண்டிவனம் – 13.09 கிமீ (மேற்கு).
10	முக்கியமான, உயர்தர அல்லது பற்றாக்குறை வளங்களைக் கொண்ட பகுதிகள் (நிலத்தடி நீர் ஆதாரங்கள், மேற்பரப்பு வளங்கள், வனவியல், விவசாயம், மீன்வளம், சுற்றுலா, கனிமங்கள்)	இல்லை
11	ஏற்கனவே மாசு அல்லது சுற்றுச்சூழல் பாதிப்புக்குள்ளான பகுதிகள். (தற்போதுள்ள சட்ட சுற்றுச்சூழல் தரநிலைகள் மீறப்பட்டவை)	இல்லை
12	சுற்றுச்சூழல் பிரச்சனைகளை (பூகம்பங்கள், சரிவு, நிலச்சரிவு, அரிப்பு, வெள்ளம் அல்லது தீவிர அல்லது பாதகமான காலநிலை நிலைமைகள்) முன்வைக்க திட்டம் ஏற்படுத்தக்கூடிய இயற்கை ஆபத்துக்கு ஆளாகக்கூடிய பகுதிகள்	நிலநடுக்கம், வெள்ளம் போன்றவை ஏற்படாத பகுதி

வானிலை, காற்று, நீர், இரைச்சல் மற்றும் மண் சூழல்களுக்கான அடிப்படை தரவு சேகரிப்பு மார்ச் 2024 இல் மேற்கொள்ளப்பட்டது.

காற்று, நீர், சத்தம் மற்றும் மண் மாதிரிகள் NABL அங்கீகாரம் பெற்ற ஆய்வகம் மூலம் சேகரிக்கப்பட்டு பகுப்பாய்வு செய்யப்படுகின்றன.

11.2 பாதகமான விளைவுகள் எவ்வாறு குறைக்கப்பட்டன என்பதற்கான விளக்கம்

11.2.1 காற்று சூழல்

6 இடங்களில் காற்று கண்காணிப்பு மேற்கொள்ளப்பட்டு முடிவுகள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 11.2: சுற்றுப்புற காற்றின் தரக்கண்காணிப்பு இடங்களின் விவரங்கள்

வரிசை எண்	இருப்பிடக் குறியீடு	கண்காணிப்பு இடங்கள்	தூரம்	அட்சரேகை மற்றும் தீர்க்கரேகை
1	AAQ1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	மையபகுதி	12°13'10.17"N 79°46'10.51"E
2	AAQ2	நல்முக்கல்	2.13 கிமீ, தென்மேற்கு	12°12'12.58"N 79°45'32.6"E
3	AAQ3	சீனலூர்	2.20 கிமீ, மேற்கு	12°12'34.19"N 79°46'57.62"E
4	AAQ4	குன்னபாக்கம்	1.02 கிமீ, வடமேற்கு	12°13'09.47"N 79°45'00.38"E
5	AAQ5	ஏந்தூர்	1.80 கிமீ, வடமேற்கு	12°13'39.51"N 79°45'58.18"E
6	AAQ6	தென்னம்பூண்டி	1.65 கிமீ, வடகிழக்கு	12°13'44.03"N 79°46'54.41"E

நிலைய குறீடு	குறைவான	அதிகமான	சராசரி
Particulate matter PM-$_{2.5}$ (µg/m^3)			
AAQ-1	41.2	67.3	54.25
AAQ-2	38.1	59.2	48.65
AAQ-3	36.2	51.2	43.70
AAQ-4	36.1	56.7	46.40
AAQ-5	36.3	53.2	44.75
AAQ-6	42.2	53.5	47.85
CPCB NAAQS 2009 for PM $_{2.5}$ - 60 µg/m^3			
Particulate matter PM-$_{10}$ (µg/m^3)			
AAQ-1	19.20	32.3	25.75
AAQ-2	18.2	30.4	24.30
AAQ-3	17.38	25.3	21.34
AAQ-4	16.64	25.1	20.87
AAQ-5	18.10	26.2	22.15
AAQ-6	19.70	25.1	22.40
CPCB NAAQS 2009 for PM $_{10}$ - 100 µg/m^3			
Sulphur Di-oxide as SO_2 (µg/m^3)			
AAQ-1	4.4	7.5	5.95
AAQ-2	3.7	7.2	5.45
AAQ-3	4.1	5.8	4.95
AAQ-4	3.2	5.4	4.30
AAQ-5	3.7	6.8	5.25
AAQ-6	3.2	5.8	4.50
CPCB NAAQS 2009 for SO_2 – 80 µg/m^3			
Oxide of Nitrogen as NO_2 (µg/m^3)			
AAQ-1	6.5	9.9	8.20
AAQ-2	6.1	9.1	7.60
AAQ-3	5.5	8.2	6.85
AAQ-4	5.7	7.9	6.80
AAQ-5	5.8	8.9	7.35
AAQ-6	6.2	9.5	7.85
CPCB NAAQS 2009 for NO_2 – 80 µg/m^3			

மாசுபடுத்தும் செறிவுகளின் அனைத்து மதிப்புகளும் NAAQ தரநிலைகளுக்குள் இருப்பது கண்டறியப்பட்டது.

11.2.2 நீர் சூழல்

அட்டவணை 11.3, 6 இடங்களில் நிலத்தடி நீர் மாதிரி பகுப்பாய்வு முடிவுகள்							விவரக்குறிப்பு / வரம்பு (As per IS:10500: 2012)	
	W1	W2	W3	W4	W5	W6	Desirable	Permissible
நாற்றம்	ஒத்துக்கக் கொள்ளக்கூடியது	ஒத்துக்கக் கொள்ளக்கூடியது	ஒத்துக்ககொள்ளக்கூடியது	ஒத்துக்கக் கொள்ளக்கூடியது	ஒத்துக்கக் கொள்ளக்கூடியது	ஒத்துக்க கொள்ளக்கூடியது	ஒத்துக் கொள்ளக் கூடியது	
கொந்தளிப்பு	<1	<1	<1	<1	<1	<1	ஒத்துக்கொள்ளக்கூடியது	
pH 25°C இல்	7.17	7.12	7.12	7.48	6.98	6.97	6.5 - 8.5	தளர்வு இல்லை
மின் கடத்துத்திறன்	949.9	1103	1058	1103	1529	723.7	1	5
மொத்த கரைந்த திடப்பொருள்கள்	570	666	640	670	930	440	500	2000
CaCO ஆக மொத்த கடினத்தன்மை$_3$	372	261	376	253	507	234	1	15
Ca என கால்சியம்	106	82.4	63.4	76.0	109	64.9	200	600
மெக்னீசியம் Mg ஆக	25.7	13.3	52.3	15.2	56.1	17.1	200	600
CaCO ஆக கால்சியம்$_3$	265	206	158	190	273	162	75	200
CaCO ஆக மெக்னீசியம்$_3$	107	55	218	63.4	234	71.3		
CaCO ஆக மொத்த காரத்தன்மை$_3$	303	311	412	307	416	263		
Cl ஆக குளோரைடு$^-$	139	194	180.0	196	256	102.0	250	1000
Cl ஆக இலவச எஞ்சிய குளோரின்$^-$	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	BDL (D.L - 0.2)	30	100
சல்பேட்டுகள் SO ஆக$_4^{2-}$	97.0	186	89.2	179.0	220	82.6	45	தளர்வு இல்லை
Fe என இரும்பு	0.05	0.06	0.02	0.05	0.04	0.02	200	400
நைட்ரேட் NO ஆக உள்ளது$_3$	2.39	2.14	1.69	3.64	4.85	3.26	1	தளர்வு இல்லை
ஃவுளூரைடு எஃப்	0.26	0.32	0.44	0.41	0.36	0.42	0.1	0.3
Mn ஆக மாங்கனீசு	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL (D.L - 0.05)	BDL(D.L -0.05)	குறிப்பிடப்படவில்லை	குறிப்பிடப்படவில்லை

அனைத்து மதிப்புகளும் அனுமதிக்கப்பட்ட வரம்புகளுக்குள் இருப்பது கண்டறியப்பட்டது.

11.2.3 இரைச்சல் சூழல்

இரைச்சல் அளவுகள் 6 இடங்களில் அளவிடப்பட்டு முடிவுகள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 11.4 இரைச்சல் கண்காணிப்பு முடிவுகள்

வ. எண்	நிலையம்	பகல் வரம்பு	இரவு வரம்பு	பகலுக்கு சமமான வரம்புகள் CPCB	இரவுக்கு சமமான வரம்புகள் CPCB
1	முன்மொழியப்பட்ட குத்தகை பகுதிக்குள்	39.3	38.0	75	70
2	நல்முக்கல்	50.5	41.8		
3	சீனலூர்	48.3	39.8		
4	குன்னபாக்கம்	50.9	42.2		
5	ஏந்தூர்	46.8	40.8		
6	தென்னம்பூண்டி	45.5	42.0		

11.2.4 மண் சூழல்

6 இடங்களில் இருந்து மண் மாதிரிகள் சேகரிக்கப்பட்டு முடிவுகள் கீழே கொடுக்கப்பட்டுள்ளன.

அட்டவணை 11.5 மண் மாதிரி பகுப்பாய்வின் முடிவுகள்

வ. எண்	அளவுரு	அலகு	S1	S2	S3	S4	S5	S6
வ.எண்	அளவுரு	அலகு	முடிவுகள்	முடிவுகள்	முடிவுகள்	முடிவுகள்	முடிவுகள்	முடிவுகள்
1	PH	-	5.94	7.68	7.03	6.99	8.14	8.73
2	EC	µmhos/cm	70.24	492.7	100.8	150.7	214	509.8
3	உலர் பொருள்	%	91.06	88.49	90.4	85.94	88.09	91.15
4	தண்ணீர் அளவு	%	8.94	11.51	9.6	14.06	11.91	8.85
5	ஆர்கானிக் மேட்டர்	%	1.63	2.3	1.71	1.59	0.68	0.8
6	மண் அமைப்பு	-	சில்ட்டி லோம்	சில்ட்டி களிமண்	சில்ட்டி லோம்	சில்ட்டி களிமண்	சில்ட்டி களிமண்	சில்ட்டி களிமண்
7	தானிய அளவு விநியோகம் மணல்	%	36.95	4.89	41.47	6.56	4.27	5.78
8	SILT	%	53.74	66.25	50.41	43.6	62.07	55.84
9	களிமண்	%	9.31	28.86	8.12	49.84	33.66	38.38
10	பாஸ்பரஸ்	mg/kg	1.21	0.59	1.03	1.22	0.74	0.82
11	சோடியம்	mg/kg	845	921	976	732	610	1002
12	பொட்டாசியம்	mg/kg	412	652	724	456	795	669
13	கேஜெல்டால் நைட்ரஜன்	mg/kg	212	260	312	405	168	340
14	கந்தகம்	%	BDL(D.L.0.02)	BDL(D.L.0.02)	BDL(D.L.0.02)	BDL(D.L.0.02)	BDL(D.L.0.02)	BDL(D.L.0.02)
15	போரசிட்டி	%	12.5	13.1	11.9	12.6	13.6	13.2
16	நீர் தாங்கும் திறன்	Inches/foot	42	45.6	44	49	46	48

11.2.5 உயிரியல் சூழல்

தாவரங்கள்

ஆய்வுப் பகுதியில் உள்ள தாவரங்களின் அளவை அளவிடுவதற்கு, நான்கு பகுதிகளாக பிரிக்கப்பட்டுள்ளது. ஒவ்வொரு நாற்புறத்திலும் உள்ள தாவரகளின் எண்ணிக்கை ஆய்வுப் பகுதியில் உள்ள மொத்த தொகைக்கு சுருக்கப்பட்டுள்ளது. கள ஆய்வு மேற்கொள்ளப்படுகிறது. எருக்கு, ஆவரை மற்றும் நாயுருவி குத்தகை பகுதியில் காணப்படுகின்றன. தாங்கல் மண்டலத்தில், வேம்பு, பப்பாளி, மா, தேக்கு போன்ற பொதுவான மரங்களும், ஆவரை, சோற்றுக்கற்றாழை போன்ற புதர்களும், கோவை, மல்லிகை போன்ற ஏறுகளும் காணப்படுகின்றன.

விலங்குகள்

ஆய்வுப் பகுதியில் பொதுவாகக் காணப்படும் நாய்கள், பூனைகள், புதர் எலி, மாடுகள், காகம், மைனா, குருவி போன்ற பறவைகள் காணப்பட்டன.

11.2.6 நில பயன்பாடு

LANDSAT – 9 செயற்கைக்கோள் படங்களைப் பயன்படுத்தி நிலப் பயன்பாட்டு நிலப்பரப்புத் தரவு கண்டறியப்பட்டுள்ளது. பயன்படுத்தப்பட்ட பட்டைகளின் எண்ணிக்கை 11. நில பயன்பாட்டு முறை கீழே கொடுக்கப்பட்டுள்ளது:

அட்டவணை எண். 11.6: ஆய்வுப் பகுதியின் முக்கிய நில பயன்பாட்டு அலகுகள் சதவீதத்தில்

வ. எண்	முதல் நிலை வகைப்பாடு	பரப்பு (sq.km)	சதவீதம் (%)	இரண்டாம் நிலை வகைப்பாடு	பரப்பு (sq.km)	சதவீதம் (%)
1	கட்டிடம் அல்லது வசிப்பிடம்	17.23	5.35	குடியிருப்பு	16.94	5.26
				வணிகம் / தொழில்	0.29	0.09
2	வேளாண்மை	247.3	76.80	பயிர் / தரிசு நிலம்	247.3	76.80
3	நீர்நிலைகள்	35.96	11.17	நீர்த்தேக்கம்/ஏரி/குளம்	35.45	11.01
				ஆறு/நீரோடை	0.51	0.16
4	தரிசு நிலம்	13.39	4.16	ஓபன் விதெளட்ஸ்க்ராப்	2.37	0.74
				ஓபன்வித் ஸ்க்ராப்	11.02	3.42
5	சுரங்கம்	7.28	2.26	சுரங்கம்	7.28	2.26
6	காடுகள்	0.85	0.26	காடுகள்	0.85	0.26
	மொத்தம்	**322**	**100**		**322**	**100**

11.2.7 சமூக பொருளாதார சூழல்

ஆய்வுப் பகுதியின் சமூகப் பொருளாதாரச் சூழல், முதன்மைத் தளங்களைப் பார்வையிடுவதன் மூலம், மாதிரி ஆய்வுகள் மூலம் ஆய்வு செய்யப்படுகிறது. 2011 மக்கள் தொகை கணக்கெடுப்பில் இருந்து பெறப்பட்ட இரண்டாம் நிலை தரவுகளும் பயன்படுத்தப்படுகின்றன.

பின்வரும் தரவு பகுதி இரண்டாம் தரவிலிருந்து சேகரிக்கப்பட்டது.

- மக்கள்தொகை முறை.
- சுகாதார முறை.
- தொழில் கட்டமைப்பு.
- வசதிகள் உள்ளன.

ஆய்வுப் பகுதியில் உள்ள நல்முக்கல், சீனலூர், குன்னபாக்கம், ஏந்தூர், தென்னம்பூண்டி ஆகிய 5 கிராமங்களுக்கு நிபுணர் பார்வையிட்டார். அப்பகுதியில் நிலவும் சமூக மற்றும் பொருளாதார நிலைமைகள் குறித்து ஆய்வு செய்தற்காக அருகில் உள்ள பகுதி மக்களுடன் கலந்துரையாடல் நடத்தப்பட்டது. நிபுணர் அருகிலுள்ள மருத்துவமனைகள், ஆரம்ப சுகாதார நிலையங்கள் மற்றும் நல்முக்கல் பார்வையிட்டார். பின்வரும் கண்காணிப்புகள் குறிப்பு செய்யப்பட்டன.

பல கிராமங்களில் ஆரம்பப் பள்ளிகள் உள்ளன. மருத்துவமனை வசதிகளுக்கு, அப்பகுதி மக்கள் குத்தகை பகுதியில் இருந்து 820 மீட்டர் தொலைவில் உள்ள நல்முக்கலில் உள்ள மருத்துவமனைக்கு செல்ல வேண்டும். மேல்நிலை மற்றும் மேல்நிலைப் பள்ளிகளைக் கொண்ட பெரிய பள்ளிகள் நல்முக்கலில் அமைந்துள்ளன. இப்பகுதியில் அமைந்துள்ள பெரிய நல்முக்கல் ஒன்றியம் விழுப்புரம் ஆகும். பெட்ரோல் பம்பு நிலையங்கள், ஏடிஎம் வசதி போன்ற வசதிகள் நல்முக்கலில் உள்ளது.

11.2.8 குத்தகை பகுதியின் ஹைட்ரோஜியாலஜி

முன்மொழியப்பட்ட இடத்தின் தென்கிழக்கில் திசையில் 10.9 கி.மீ தொலைவில் வடபெண்ணையாறு நதி இருப்பதால், ஆய்வுப் பகுதியின் நீரியல் மற்றும் நீரியல் முறை செயற்கைக்கோள் படங்களைப் பயன்படுத்தி விரிவாக ஆய்வு செய்யப்படுகிறது

வடபெண்ணையாறு தென்கிழக்கு திசையில் 10.9 கிமீ தொலைவில் அமைந்துள்ளது. ஆனால் தற்போது ஆற்றில் தண்ணீர் இல்லை. மழைக்காலங்களில் மட்டும் ஒரு சில இடங்களில் தண்ணீர் தேங்கி நிற்கும்.

ஆய்வுப் பகுதியில் பல குளங்கள் உள்ளன, அவை ஆண்டு முழுவதும் வறண்டு கிடக்கின்றன. இந்த குளங்களுக்கு மழைக்காலங்களில் மட்டுமே தண்ணீர் கிடைக்கும். பருவமழை தோல்வி, போதிய மழைப்பொழிவு, மோசமான மழை நீர் மேலாண்மை மற்றும் நீர் நுகர்வு முறை ஆகியவை காரணிகளாக இருக்கலாம்.

11.2.9 நிலத்தடி நீர் ஆய்வு

நிலத்தடி நீர் ஆய்வுக்கு, செயற்கைக்கோள் படங்கள் பயன்படுத்தப்படுகின்றன. கண்காணிப்பு நிலைகளில் இருந்து நீர் நிலைகள் இமேஜிங் மூலம் சேகரிக்கப்படுகின்றன. பருவமழைக்கு முந்தைய மற்றும் பருவமழைக்கு பிந்தைய தரவுகள் சேகரிக்கப்பட்டு முடிவுகள் பகுப்பாய்வு செய்யப்படுகின்றன.

வயல்வெளிப் பார்வையின் போது, பருவமழைக்குப் பின்னரே கிணறுகளில் தண்ணீர் கிடைப்பதை அவதானிக்க முடிந்தது. மகசூல் குறைந்த அளவில் மட்டுமே கிடைக்கும்.

சுரங்க குத்தகைப் பகுதியைக் கருத்தில் கொண்டால், அந்தப் பகுதி பாறைகள் நிறைந்த பகுதியாகும், மேலும் பெரிய கசிவு எதுவும் எதிர்பார்க்கப்படவில்லை. உற்பத்தி அளவு மிகவும் குறைவாக உள்ளது மற்றும் பரிந்துரைக்கப்பட்ட ஆழம் 38 மீட்டர் ஆகும். எனவே, அப்பகுதியில் உள்ள நீர் நிலைகளிலோ அல்லது நிலத்தடி நீர் மட்டத்திலோ சுரங்கம் எடுப்பதால் பெரிய அளவில் பாதிப்பு ஏற்படாது.

எதிர்பார்க்கப்பட்ட சுற்றுச்சூழல் தாக்கங்கள் மற்றும் தணிப்பு நடவடிக்கைகள்

- நிலச் சூழல்
- நீர் சூழல்
- தாவரங்கள்
- விலங்கினங்கள்
- காற்று சூழல்
- இரைச்சல் சூழல்
- சமூக-பொருளாதார தாக்கங்கள்

11.2.10 நிலச் சூழல்: தாக்கம் மற்றும் தணிப்பு நடவடிக்கைகள்

இத்திட்டத்தால் நிலச்சூழலில் ஏற்படும் பெரும் பாதிப்பு நில பயன்பாட்டில் ஏற்படும் மாற்றமாகும். இந்த குவாரி சிறியது மற்றும் உற்பத்தி குறைவாக இருப்பதால், சுரங்க நடவடிக்கை 38 மீட்டர் BGL வரை மேற்கொள்ளப்படும். கனிம குவாரிகளைத் தவிர, கழிவுகளை கொட்டப்படாமல் இருப்பதால், வேறு எந்த மாற்றமும் செய்யப்படாது. மழைக்காலத்தில் மண் அரிப்பைத் தடுக்க, வண்டல் மண் பொறிகள் மூலம் மாலை வாய்க்கால் அமைக்கப்படும். சுரங்கம் மூடப்படும் நிலையில் 3.86.0 ஹெக்டேர் குத்தகைப் பகுதி மழை நீர் சேகரிப்பு குளமாக விடப்படும் 0.86.0 ஹெக்டேர் பசுமை வளையம் உருவாக்கப்படும். இதற்காக, புங்கை, வாகை, வேம்பு, மஞ்சள் கொன்றை, நாவல், பூவரசு முதலிய போன்ற தாவரங்கள் தேர்ந்தெடுக்கப்படுகின்றன. மொத்தம் 2400 மரங்கள் நட திட்டமிடப்பட்டுள்ளது. இடைவெளி 3 மீ x 3 மீ இருக்கும்.

11.2.11 நீர் சூழல்: தாக்கம் மற்றும் தணிப்பு நடவடிக்கைகள்

குத்தகை பகுதிக்குள் தற்போது நீர்நிலை இல்லை. திட்டத்திற்கான முழுத் தண்ணீர் தேவை 8.0KLD ஆகும், இது வெளி நிறுவனங்களில் இருந்து பெறப்படும். மிகக்குறைந்த அளவு கழிவுநீர் உருவாகும், அதற்காக சாக்கடை தொட்டி அமைக்கப்படும்.

மழைக்காலத்தில், அதிகப்படியான மழைநீர், 0.6 மீ அகலம் மற்றும் 0.3 மீ ஆழம் கொண்ட வாய்க்கால் வழியாக வண்டல் பொறிகளுடன் சேகரிப்பு குளத்திற்கு கொண்டு செல்லப்படும்.

சுரங்க செயல்பாடு 38 மீட்டர் (BGL) ஆழம் வரை வரையறுக்கப்படும் என்பதால், எந்த கசிவும் இருக்காது. எவ்வாறாயினும், மழை நீர் ஊடுருவல் மற்றும் கசிவு நீர் சேகரிப்பு 300lpm க்கும் குறைவாக இருக்க வேண்டும், மேலும் அது 7.5H.P.மோட்டார் மூலம் உந்துதல் பெற்ற டீசல் மூலம் இயங்கும் மையவிலக்கு பம்ப் மூலம் அவ்வப்போது பம்ப் செய்யப்படும். குடிநீரின் தரம் குடிப்பதற்கு ஏற்றதாக இருக்கும் என எதிர்பார்க்கப்படுகிறது. இதனால், குவாரி குழியில் தேங்கியுள்ள தண்ணீர், அருகில் உள்ள விவசாய நிலங்களுக்குள் பாய்ச்சப்படும். மேலும் இந்த தண்ணீரை தோட்டத் தேவைகளுக்கும் பயன்படுத்தலாம்.

நீர்நிலை	தூரம்	திசை
ஓடை	230 மீட்டர்	வடகிழக்கு
ஓடை	300 மீட்டர்	வடக்கு
குளம்	230 மீட்டர்	தென்மேற்கு
பிரம்மதேசம் ஏரி	2.2 கி.மீ	தெற்கு
ஏந்தூர் ஏரி	2.53 கி.மீ	தென்கிழக்கு
கீழ்சேவூர் ஏரி	3.40 கி.மீ	வடமேற்கு
புதுப்பாக்கம் ஏரி	3.59 கி.மீ	தென்கிழக்கு
அலங்ககுப்பம் ஏரி	5.03 கி.மீ	கிழக்கு
நொளம்பூர் ஏரி	5.42 கி.மீ	வடமேற்கு
புதுநகர் ஏரி	8.24 கி.மீ	தெற்கு
நல்லாவூர் ஏரி	8.32 கி.மீ	தெற்கு

இந்த நீர்நிலைகள் குத்தகை பகுதிக்கு வெளியே அமைந்துள்ளதாலும், சுரங்கங்களில் இருந்து கழிவுநீர் வெளியேற்றப்படாமலோ அல்லது சுத்திகரிக்கப்படாத தண்ணீரோ இந்த நீர்நிலைகளுக்குள் வருவதால், பெரிய அளவில் பாதிப்பு இல்லை. போதிய பாதுகாப்பு தூரம் விடப்பட்டுள்ளது. ஆதரவாளர் குத்தகைக்குள் மட்டுமே சுரங்க நடவடிக்கையை மேற்கொலுவார் மேலும் குத்தகைக்கு வெளியே கால்வாய் அல்லது எந்த பகுதிக்கும் அருகில் வேறு எந்த வேலையும் மேற்கொள்ளப்பட மாட்டாது.

இப்பகுதியில் பொருத்தமான மழைநீர் சேகரிப்பு திட்டங்கள் மற்றும் செயற்கை ரீசார்ஜ் திட்டங்கள் செயல்படுத்த திட்டமிடப்பட்டுள்ளது.

- குவாரியில் விழும் மழை நீர் மாலை வாய்க்கால் மூலம் திறமையாக சேகரிக்கப்படும்.
- இவ்வாறு சேகரிக்கப்படும் நீர், வண்டல் பொறிகள் மூலம் சேகரிப்பு தொட்டி வழியாக அனுப்பப்படும். இந்த தண்ணீரை முன்மொழிபவர் தண்ணீர் தெளிப்பதற்கும், பச்சை நிற பெல்ட் நோக்கங்களுக்காகவும் பயன்படுத்தலாம்.
- வண்டல் நீக்கத்திற்குப் பிறகு அதிகப்படியான நீர், ஏதேனும் இருந்தால், கீழ்நிலை பயனர்களுக்கு வழங்கப்படும்.

11.2.12 உயிரியல் சூழல்: தாக்கம் மற்றும் தணிப்பு நடவடிக்கைகள்

தாக்கங்கள்

- சத்தம் மற்றும் அதிர்வு காரணமாக விலங்கினங்கள் பாதிக்கப்படுகின்றன.
- சுரங்க நடவடிக்கைகள் காரணமாக தூசி உருவாக்கம்.
- குத்தகை பகுதியின் நில பயன்பாட்டில் மாற்றம்.
- விலங்குகள் தற்செயலாக விழுதல்

தணிப்பு நடவடிக்கைகள்

- சுரங்கங்களில் வெடிக்கும் முன் சைரன்கள் ஊதப்படும். ஒலி அளவைக் குறைக்க, தோட்டம் செய்யப்படும். ஒதுக்கப்பட்ட நேரத்தில் மட்டுமே வெடிப்பு மேற்கொள்ளப்படும்.
- தூசி உற்பத்தியைக் குறைக்க, நீர் தெளிப்பான்கள் பயன்படுத்தப்படும். போக்குவரத்தின் போது, தார்பாய் கொண்டு மூடப்பட்டிருக்கும். மாசு உற்பத்தியை குறைக்க தண்ணீர் தெளிக்கப்படும்.
- சுரங்கம் மூடப்படும் நிலைக்குப் பிறகு, சுரங்கப் பள்ளம் மழை நீர் சேகரிப்புத் தொட்டியாக விடப்படும், இது அருகிலுள்ள பகுதிகளில் பறவைகளின் கூட்டத்தை ஈர்க்கும்.
- விலங்குகள் நுழைவதைத் தடுக்க, சுரங்கப் பகுதி சுற்றி வேலி அமைக்கப்படும்.

11.2.13 காற்று சூழல்: தாக்கம் மற்றும் தணிப்பு நடவடிக்கைகள்

சுரங்க நடவடிக்கைகளால் ஏற்படும் முக்கிய காற்று மாசுபாடுகள் PM10, PM2.5 போன்ற தப்பிக்கும் உமிழ்வுகள் ஆகும். இந்த மாசுபாடுகளைத் தவிர, தோண்டுதல்/ஏற்றுதல் கருவிகள் மற்றும் வாகனங்கள், சல்பர் டை ஆக்சைடு (SO2) மற்றும் நைட்ரஜனின் ஆக்சைடுகள் (NOx) ஆகியவற்றின் வாயு உமிழ்வுகள் திட்டப் பகுதியில் காற்று மாசுபாட்டிற்கு காரணமாகின்றன.

துளையிடுதல், வெடித்தல் மற்றும் போக்குவரத்து ஆகியவற்றால் ஏற்படும் தூசி உமிழ்வு முக்கிய பாதிப்புகள். ஈரமான துளையிடல் முறைகளைப் பயன்படுத்துதல், குறிப்பிட்ட நேரத்தில் மட்டும் வெடிவைத்தல், சாதகமற்ற வானிலையின் போது வெடிப்பதைத் தவிர்த்தல், நல்ல தரமான வெடிமருந்துகளைப் பயன்படுத்துதல், நீர் தெளிப்பான்களைப் பயன்படுத்துதல், எடுத்துச் செல்லும் பொருட்களை தார்ப்பாய் கொண்டு மூடுதல்

ஆகியவை முக்கிய தணிப்பு நடவடிக்கைகளில் அடங்கும். டிப்பர்கள், போக்குவரத்திற்கு பயன்படுத்தப்படும் வாகனங்களை முறையாக பராமரித்தல், போக்குவரத்துக்கு பயன்படுத்தப்படும் வாகனங்களுக்கு வழக்கமான உமிழ்வு சோதனைகளை நடத்துதல், குத்தகை பகுதியில் 7.5மீ பாதுகாப்பு மண்டலத்தில் பச்சை வளையம்டை உருவாக்க முன்மொழியப்பட்டுள்ளது.

எதிர்பார்க்கப்படும் தரவு AERMOD மென்பொருளைப் பயன்படுத்தி கணக்கிடப்படுகிறது மற்றும் திட்டமிடப்பட்ட மதிப்புகள் வரம்புகளுக்குள் இருக்கும்.

11.2.14 இரைச்சல் சூழல்: தாக்கம் மற்றும் தணிப்பு நடவடிக்கைகள்

தாக்கங்கள்

குத்தகை பகுதிக்கு உள்ளேயும் வெளியேயும் கனிமங்களை துளையிடுதல், வெடிக்கச் செய்தல் மற்றும் கொண்டு செல்வது போன்ற செயல்பாடுகளால் சுரங்கத்தில் சத்தம் உண்டாகிறது.

- DGMS (டைரக்டரேட் ஜெனரல் ஆஃப் மைன்ஸ் சேஃப்டி) வரம்புகளின்படி, 8 மணிநேர வெளிப்பாடு காலத்திற்கு ஏற்றுக்கொள்ளக்கூடிய இரைச்சல் அளவு 85 dB(A) ஆகும்.
- உரத்த சத்தத்தை வெளிப்படுத்துவது உயர் இரத்த அழுத்தம், இதய நோய், தூக்கக் கலக்கம் மற்றும் மன அழுத்தத்தையும் ஏற்படுத்தும். ஒலி மாசுபாடு வனவிலங்குகளின் ஆரோக்கியத்தையும் நல்வாழ்வையும் பாதிக்கிறது.
- நிர்ணயிக்கப்பட்ட வரம்புகளை மீறும் சத்தம், அசாதாரணமான சத்தம் உணர்தல், டின்னிடஸ் போன்ற குறைபாடுகளை ஏற்படுத்தலாம், இது காதுகளில் தொடர்ந்து அதிக ஒலி எழுப்புதல், பாராகுசிஸ் அல்லது சிதைந்த செவிப்புலன் ஆகியவற்றை ஏற்படுத்துகிறது.

தணிப்பு நடவடிக்கைகள்

- மூலத்திற்கும் ஏற்பிக்கும் இடையே உள்ள தூரம் அதிகரிக்கும் போது, இரைச்சல் அளவும் குறைகிறதுஎனவே ., இயற்கையான தேய்மானம் ஏற்படும்.
- முன்மொழியப்பட்ட குத்தகைப் பகுதியின் சுற்றளவில் பசுமைப் பட்டையை உருவாக்கத் திட்டமிட்டுள்ளது, இது அவற்றைத் தணிப்பதன் மூலம் ஒலியின் அளவைக் குறைக்கிறது.
- சத்தம் எழுப்புவதைக் கட்டுப்படுத்த சம்பந்தப்பட்ட அனைத்து உபகரணங்களும்/இயந்திரங்களும்/டிரக்குகளும் முறையாகப் பராமரிக்கப்படும்.
- சம்பந்தப்பட்ட ஊழியர்களுக்கு வழக்கமான சுகாதார பரிசோதனைகளை நடத்துதல்.

- ஊழியர்கள் வெளிப்படும் நேரத்தைக் குறைப்பதற்காக ஷிப்டுகளில் பணிபுரியச் செய்யப்படுவார்கள்.
- அனைத்து ஊழியர்களுக்கும் காது செருகிகளை வழங்குதல்.
- இந்த நடவடிக்கைகளை மேற்கொள்வதன் மூலம், அடிப்படை மதிப்பு குறைவாக இருப்பதால், MoEF & CC வரம்புகளுக்குள் இரைச்சல் அளவுகள் நன்கு பராமரிக்கப்படும்.

11.2.15 அதிர்வு: தாக்கம் மற்றும் தணிப்பு நடவடிக்கைகள்

தாக்கங்கள்

- குத்தகை பகுதிக்குள் பணிபுரியும் நபர்களால் மட்டுமே அதிர்வு உணரப்படும் என்றாலும், அது பொதுவாக விரும்பத்தகாதது.
- அதிர்வு ஃப்ளைராக்ஸையும் ஏற்படுத்தலாம்.
- குத்தகைப் பகுதியில் உள்ள பறவைகள் மற்றும் சிறு பூச்சிகளை இது பயமுறுத்தலாம். இருப்பினும், அது ஒரு குறுகிய காலத்திற்கு மட்டுமே உணரப்படும்.

தணிப்பு நடவடிக்கைகள்

- மதியம் 12:00 முதல் மதியம் 2:00 மணி வரை மட்டுமே, வரையறுக்கப்பட்ட அளவில் வெடிப்பை மேற்கொள்வது.
- DGMS மற்றும் MOEF & CC ஆல் பரிந்துரைக்கப்பட்ட தரத்துடன் உச்ச துகள் வேகத்தை பராமரிப்பதன் மூலம் பறக்கும் பாறை மற்றும் அதிர்வுகளை கட்டுப்படுத்துதல்.
- குறைந்த ஆழத்தில் ஜாக்ஹாம்மர் துளையிடுதல் மற்றும் வெடித்தல் ஆகியவை குறைந்தபட்ச வெடிமருந்துகளைப் பயன்படுத்தி மேற்கொள்ள பரிந்துரைக்கப்படுகிறது.
- திறமையான மற்றும் சட்டப்பூர்வ ஃபோர்மேன்/ சுரங்க மேலாளரால் வெடிப்பை மேற்பார்வை செய்தல்.

11.2.16 சமூக பொருளாதார சூழல்

தாக்கம் மற்றும் தணிப்பு நடவடிக்கைகள்

யாரிடமிருந்தும் நிலம் கையகப்படுத்தப்படவில்லை. மறுவாழ்வு தேவையில்லை. எனவே, எதிர்மறையான தாக்கம் இல்லை. CER நடவடிக்கைகளுக்காக INR 8,00,000 செலவழிக்க முன்மொழிபவர் திட்டமிட்டுள்ளார். பொது விசாரணைக்குப் பிறகு இந்தத் தொகை மாற்றப்படும்.

11.2.17 தொழில் ஆரோக்கியம்

தாக்கங்கள்

துளையிடுதல் மற்றும் வெடிப்பதால் தூசி உருவாக்கம், துளையிடுதல் மற்றும் வெடிப்பதால் ஏற்படும் சத்தம், எதிர்பாராத விபத்துக்கள். தூசியின் தொடர்ச்சியான வெளிப்பாடு நிமோனியா, காசநோய், வாத மூட்டுவலி மற்றும் பிரிவு அதிர்வுகளை ஏற்படுத்துகிறது, குறுகிய கால தாக்கம் தூக்கமின்மை, உயர் இரத்த அழுத்தம் மற்றும் இதய நோய்கள். நீண்ட கால வெளிப்பாடு பகுதி அல்லது நிரந்தர காது கேளாமைக்கு வழிவகுக்கும், முறையற்ற சுரங்க முறைகளால் பாறைகள், பிளவுகள் அல்லது பிளவுகள் ஆகியவை அபாயங்களில் அடங்கும்.

தணிப்பு நடவடிக்கைகள்

காற்று மாசுபாடுகளின் அதிகரிப்பைக் குறைக்க சாலைகளில் தண்ணீர் தெளித்தல் போன்ற தூசியை அடக்கும் நடவடிக்கைகளைப் பயன்படுத்துதல்

- காற்று மாசுபாடு மற்றும் சத்தம் குறைப்புக்கு மரங்களைநடுதல்.
- சரிவு நிலைத்தன்மையை உறுதி செய்தல்.
- வெடிப்புக்கு பயிற்சி பெற்ற நிபுணர்களை மட்டுமே பயன்படுத்துதல்.
- சேர்ப்பதற்கு முன் ஊழியர்களுக்கு முன் மருத்துவப் பரிசோதனை நடத்துதல்.
- 6 மாதங்களுக்கு ஒருமுறை அவ்வப்போது மருத்துவப் பரிசோதனை நடத்துதல்.
- சுரங்க அலுவலகத்தில் அனைத்து முதலுதவி பெட்டிகளையும் கிடைக்கச் செய்தல்.
- தீயை அணைக்கும் கருவியை திட்ட இடத்தில் வைத்திருத்தல்.
- எதிர்பாராத நிகழ்வுகளை எவ்வாறு கையாள்வது என்பது குறித்து ஊழியர்களுக்குக் கற்பித்தல்.
- சுரங்க அலுவலகத்தில் அவசரத் தொடர்பு எண்கள் அடங்கிய தகவலை இடுகையிடுதல்.
- இந்த அனைத்து நடவடிக்கைகளையும் மேற்கொள்வதன் மூலம், குவாரியில் பணிபுரியும் ஊழியர்களின் பாதுகாப்பு உறுதி செய்யப்படும்.

11.2.18 சுற்றுச்சூழல் கண்காணிப்பு திட்டம்

செயல்படுத்தப்பட்ட கட்டுப்பாட்டு நடவடிக்கைகளின் செயல்திறனை அளவிட கண்காணிப்பு செய்யப்படுகிறது. திட்டச் செயல்பாட்டின் போது சுற்றுச்சூழலின் நிலையை மதிப்பிடுவதற்கு காற்று, நீர், சத்தம் மற்றும் மண் சூழல்கள் போன்ற பல்வேறு சுற்றுச்சூழல் அளவுருக்களின் வழக்கமான கண்காணிப்பு தேவைப்படுகிறது. திட்டத்தின் செயல்பாட்டின் போது பல்வேறு அளவுருக்களை கண்காணிக்க

காலவரிசையுடன் ஒரு அட்டவணை வடிவமைக்கப்பட்டுள்ளது. சுற்றுச்சூழல் மேலாண்மைத் திட்டத்தின் செயல்திறனை மதிப்பிடுவதற்கு, முக்கியமான சுற்றுச்சூழல் அளவுருக்களின் வழக்கமான கண்காணிப்பு மேற்கொள்ளப்படும். காற்று கண்காணிப்பு 3 மாதங்களுக்கு ஒரு முறை மேற்கொள்ளப்படும், ஒரு பருவத்திற்கு ஒரு முறை தண்ணீர் மாதிரி சேகரிக்கப்படும், 3 மாதங்களுக்கு ஒரு முறை சத்தம் கண்காணிக்கப்படும், ஒரு பருவத்திற்கு ஒரு முறை மண் மாதிரிகள் பகுப்பாய்வு செய்யப்படும். EMPக்கு, INR 433.95 லட்சம் பட்ஜெட் ஒதுக்கப்பட்டடுள்ளது.

11.2.19 திட்டப் பயன்கள்

நிதி நன்மைகள்

- இந்த திட்டம் ராயல்டி, ஜிஎஸ்டி போன்ற வரிகளை செலுத்துவதன் மூலம் நிதி ரீதியாக பங்களிக்கும்.
- இந்தத் திட்டம் CSR மூலமாகவும் பங்களிக்கும்.
- பொது விசாரணையின் போது மக்களின் கோரிக்கைகளும் திட்ட ஆதரவாளரால் பரிசீலிக்கப்படும்.

சமுதாய நன்மைகள்

- இந்தத் திட்டம் நேரடியாக 43 பேருக்கு வேலைவாய்ப்பை வழங்குகிறது. உள்ளூர் மக்கள் பணியமர்த்தப்படுவார்கள்.
- CSR மூலம், அருகிலுள்ள பள்ளிகள், மருத்துவமனைகள் பயன்பெறும்.
- CSR க்காக, 8,00,000 ரூபாய் ஒதுக்கப்படுகிறது.
- பொது விசாரணையின் போது மக்களின் கோரிக்கையின் அடிப்படையில், தேவைப்பட்டால் மேலும் நிதி ஒதுக்கீடு செய்யப்படும்.

சுற்றுச்சூழல் மேலாண்மைத் திட்டம் தயாரிக்கப்பட்டு, ஐந்து ஆண்டுகளுக்கு 433.95 லட்சம் EMP செலவாக ஒதுக்கப்பட்டது. EMP மாறும், நெகிழ்வானது மற்றும் அவ்வப்போது மதிப்பாய்வுக்கு உட்பட்டது. முக்கிய சுற்றுச்சூழல் பாதிப்புகள் தொடர்புடைய திட்டத்திற்கு, EMP வழக்கமான மதிப்பாய்வில் இருக்கும். எனவே, EMP இல் குறிப்பிடப்பட்டுள்ள அனைத்து இலக்குகளையும் நிறைவேற்றுவதற்கு முறையான நடவடிக்கைகள் எடுக்கப்படும், மேலும் திட்டம் ஆய்வுப் பகுதியில் நேர்மறையான தாக்கத்தை ஏற்படுத்தும்.

*****

அத்தியாயம் 12

ஆலோசகர்களின் வெளிப்பாடு

தி/ள்.குளோபல் மைனிங் சொல்யூஷன்ஸ் என்பது NABET சான்றிதழ் NABET/EIA/2326/IA 0110 இன் படி NABET அங்கீகாரம் பெற்ற EIA நிறுவனம் ஆகும். தி/ள்.குளோபல் மைனிங் சொலூசன்ஸின் பதிவு செய்யப்பட்ட அலுவலகம் அமைந்துள்ள இடம் பிளாட் எண்.6, S.F.No.13/2 A2, VS City, RC செட்டிப்பட்டி, கோட்டமேட்டுப்பட்டி, ஓமலூர், சேலம், தமிழ்நாடு-636455.

தமிழ்நாடு, விழுப்புரம் மாவட்டம், மரக்காணம் வட்டத்தில் உள்ள நல்முக்கல் கிராமத்தில் 4.75.0 ஹெக்டேர் பரப்பளவில், மொத்தக் கிளஸ்டர் பகுதி 10.65.0 ஹெக்டேர் பரப்பளவில், உத்தேச சாதாரண கல் மற்றும் கிராவல் குவாரிக்கு பங்களிப்பு செய்யும் நிபுணர்களின் அறிவிப்பு.

மேற்கூறிய EIA ஐ உருவாக்கிய EIA குழுவில் நானும் ஒரு பகுதியாக இருந்தேன் என்பதை இதன் மூலம் சான்றளிக்கிறேன்.

EIA ஒருங்கிணைப்பாளர் பெயர்: மணிகண்டன் மாணிக்கம்

கையொப்பம் மற்றும் தேதி

ஈடுபாட்டின் காலம்: மார்ச் 2024-முதல் மே 2024 வரை.

தொடர்பு தகவல்:

தி/ள். குளோபல் மைனிங் சொல்யூஷன்ஸ்,

பிளாட் எண்.6, SF எண். 13/2, A2, VS சிட்டி, RC செட்டிபட்டி,

கோட்டமேட்டுப்பட்டி, ஓமலூர்,

சேலம், தமிழ்நாடு - 636 455

வரிசை என	செயல்பாட்டு பகுதிகள்	நிபுணர்/கள் பெயர்	ஈடுபாடு (காலம் மற்றும் பணி**)	கையொப்பம் மற்றும் தேதி
1	*AP*	*தனலட்சுமி ராமநாதன்*	*தற்போதுள்ள காற்றின் தரத்தை மதிப்பீடு செய்தல், சுற்றுப்புற காற்றில் திட்டத்தின் தாக்கம் மற்றும் காற்று மாசுபாட்டிற்கான பரிந்துரைகளை குறைக்கும் நடவடிக்கைகள்.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
2	*WP*	*அபிராமி கலியபெருமாள்*	*தற்போதுள்ள நீரின் தரத்தை மதிப்பீடு செய்தல், மேற்பரப்பு மற்றும் நிலத்தடி நீரின் தரத்தில் திட்டத்தின் தாக்கம், பாதிப்பைக் குறைப்பதற்கான தணிப்பு நடவடிக்கைகளை பரிந்துரைத்தது.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
3	*SHW*	*ராமதாஸ் என்*	*திட்டத்தில் இருந்து உருவாகும் கழிவுகளை மதிப்பீடு செய்தல், கழிவு மேலாண்மை நடைமுறைகள் பரிந்துரைக்கப்பட்டது.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
4	*SE*	*சரஸ்வதி கே*	*அடிப்படை SE ஆய்வு. தரவு தொகுப்பு மற்றும் மதிப்பீடு. பகுதியின் SE நிலையில் திட்டத்தின் தாக்கம். CER திட்டத்தின் உருவாக்கம்.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	

5	*EB*	*சரவணன் எஸ்*	*பிரதேசத்தின் சூழலியல் தொடர்பான அடிப்படை தரவு சேகரிப்பு.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
6	*HG*	*ரவீந்திரன் என்*	*இப்பகுதியின் நீர்வளவியல் அம்சம். நிலத்தடி நீர் ஆழம் மற்றும் இப்பகுதியின் நிலத்தடி நீரில் திட்டத்தின் தாக்கம்.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
7	*AQ*	*ஸ்ரீலதா திருவீதியுலா*	*பகுதி மூல மாதிரியைப் பயன்படுத்தி காற்றின் தர மாதிரியாக்கம். தூசியின் தரை மட்ட செறிவின் கணிப்பு. தகுந்த தணிப்பு நடவடிக்கைகளை பரிந்துரைத்தல்.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
8	*NV*	*தனலட்சுமி ராமநாதன்*	*பகுதியின் சுற்றுப்புற இரைச்சல் ஆய்வு. குவாரி செயல்பாடு மற்றும் திட்டத்தால் ஏற்படும் சத்தத்தின் தாக்கம் காரணமாக அதிகரிக்கும் சத்தம்.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
9	*LU*	*ஸ்ரீலதா திருவீதியுலா*	*செயற்கைக்கோள் படங்களின் அடிப்படையில் நில பயன்பாட்டு வரைபடம் தயாரித்தல். நில பயன்பாட்டு வகைப்பாடு மற்றும் பகுப்பாய்வு. சுற்றியுள்ள நில சூழலில் திட்டத்தின் தாக்கம் கணிப்பு.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	

10	*RH*	*எஸ்.வி. பிரசாந்த்*	*சுரங்க நடவடிக்கைகள் தொடர்பான இடர்களை கண்டறிதல். அவசரகால பேரிடர் மேலாண்மை திட்டத்தை தயாரித்தல். தொழிலாளிக்கு பாதுகாப்பு உபகரணங்களை வழங்குவதற்கான திட்டம்.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
11	*SC*	*சிசுபால் சிங்*	*மண் கண்காணிப்பு, மண்ணின் வகை, மண் மேலாண்மை நடைமுறைகள், மேல் மண்ணின் பயன்பாடு குறித்த இரண்டாம் நிலை தரவு சேகரிப்பு.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	
12	*GEO*	*வள்ளியப்பன் மெய்யப்பன்*	*புவியியல் வரைபடம், குவாரி மற்றும் குப்பைகளின் ஸ்திரத்தன்மை, சுரங்க குவாரியின் பயன்பாட்டிற்குப் பிறகு சுரங்க நிலைத்தன்மைக்கான மேலாண்மைத் திட்டம் மற்றும் பகுதியின் புவியியல் அம்சம்.* *காலம்: மார்ச் 2024-முதல் மே 2024 வரை.*	

TM-FAE:

வ எ ண்	TM இன் பெயர் (FAE)	செயல்பாட்டு பகுதி	அங்கீகரிக்கப்பட்ட FAE (கீழ் வேலை செய்ய)	ஈடுபாட்டின் காலம்	வேலை தன்மை	கையெழுத்து
1	M.பிரபு	LU	டி.ஸ்ரீலதா	மார்ச் 2024- முதல் மே 2024 வரை	செயற்கைக்கோள் படங்களின் அடிப்படையில் நில பயன்பாட்டு வரைபடத்தை தயாரிப்பதில் FAE உடன் தொடர்புடையது, நில பயன்பாட்டு வகைப்பாடு மற்றும் பகுப்பாய்வு, சுற்றியுள்ள நில சூழலில் தாக்கம் கணிப்பு	
		HG	அசோக் குமார்		ஆய்வுப் பகுதியின் ஹைட்ரோஜியோலாஜிக்கல் வடிவத்தைப் படிப்பதில் FAE உடன் தொடர்புடையது, நிலத்தடி நீர் மற்றும் நிலத்தடி நீரில் திட்டத்தின் தாக்கத்தை ஆய்வு செய்தல்	
2	M. மணிகண்டன்	EB	எஸ்.சரவணன்	மார்ச் 2024- முதல் மே 2024 வரை	ஆய்வுப் பகுதியின் சூழலியல் தொடர்பான அடிப்படை தரவு சேகரிப்பில் நிபுணருடன் தொடர்புடையது	
		SC	சிசுபால் சிங்		மண் கண்காணிப்பு, மண் வகை, மண் மேலாண்மை நடைமுறைகள், மேல் மண்ணின் பயன்பாடு குறித்த இரண்டாம் நிலை தரவு சேகரிப்பு ஆகியவற்றில் நிபுணருடன் தொடர்புடையது.	

TM-FAE:

TM-FAA:						
வ. எண்	TM இன் பெயர் (FAA)	செயல்பாட்டு பகுதி	அங்கீகரிக்கப்பட்ட FAE (கீழ் வேலை செய்ய)	ஈடுபாட்டின் காலம்	வேலை தன்மை	கையெழுத்து
1	சுரேஷ்	WP	*அபிராமி கலியபெருமாள்*	மார்ச் 2024-முதல் மே 2024 வரை	தற்போதுள்ள நீரின் தரத்தை மதிப்பிடுவதிலும், மேற்பரப்பு மற்றும் நிலத்தடி நீரின் தரத்தில் திட்டத்தின் தாக்கத்தைப் படிப்பதிலும், பாதிப்பைக் குறைப்பதற்கான தணிப்பு நடவடிக்கைகளை பரிந்துரைப்பதிலும் நிபுணருடன் தொடர்புடையது.	M.Suresh
		AP	*தனலட்சுமி ராமநாதன்*		தற்போதுள்ள காற்றின் தரம், சுற்றுப்புற காற்றில் திட்டத்தின் தாக்கம் மற்றும் காற்று மாசுபாட்டிற்கான தணிப்பு நடவடிக்கைகளை பரிந்துரைப்பதில் நிபுணருடன் தொடர்புடையது	
2	S.காமராஜ்	SC	சிசுபால் சிங்	மார்ச் 2024-முதல் மே 2024 வரை	மண் கண்காணிப்பு, மண் வகை, மண் மேலாண்மை நடைமுறைகள், மேல் மண்ணின் பயன்பாடு குறித்த இரண்டாம் நிலை தரவு சேகரிப்பு ஆகியவற்றில் நிபுணருடன் தொடர்புடையது.	S.Kamaraj
		RH	எஸ்.வி.பிரஷாந்த்		சுரங்க நடவடிக்கைகள் தொடர்பான ஆபத்தை கண்டறிவதில் நிபுணருடன் தொடர்புடையது. அவசரகால பேரிடர் மேலாண்மை திட்டத்தை தயாரித்தல். தொழிலாளர்களுக்கு பாதுகாப்பு உபகரணங்களை வழங்குவதற்கான திட்டம்	
3.	S. அசன் அலி	WP	*அபிராமி கலியபெருமாள்*	மார்ச் 2024-முதல் மே 2024 வரை	தற்போதுள்ள நீரின் தரத்தை மதிப்பிடுவதிலும், மேற்பரப்பு மற்றும் நிலத்தடி நீரின் தரத்தில் திட்டத்தின் தாக்கத்தைப் படிப்பதிலும், பாதிப்பைக் குறைப்பதற்கான தணிப்பு நடவடிக்கைகளை பரிந்துரைப்பதிலும் நிபுணருடன் தொடர்புடையது.	S. Asan ali
		GEO	வள்ளியப்பன் மெய்யப்பன்		புவியியல் வரைபடத்தை தயாரிப்பதில் நிபுணருடன் தொடர்புடையது, குவாரி சரிவு முகங்கள் மற்றும் குப்பைகளின் நிலைத்தன்மையை மதிப்பீடு செய்தல், சுரங்க குவாரி மற்றும் பகுதியின் புவியியல் அம்சங்களைப்	

					பயன்படுத்திய பிறகு, சுரங்க நிலைத் தன்மைக்கான மேலாண்மைத் திட்டம்	
		AP	தனலட்சுமி ராமநாதன்		தற்போதுள்ள காற்றின் தரம், சுற்றுப்புற காற்றில் திட்டத்தின் தாக்கம் மற்றும் காற்று மாசுபாட்டிற்கான தணிப்பு நடவடிக்கைகளை பரிந்துரைப்பதில் நிபுணருடன் தொடர்புடையது	
		NV	தனலட்சுமி ராமநாதன்		அதன் கணிப்பு, பறக்கும் பாறைகள் மற்றும் காற்று வெடிப்பு (சத்தம்) கண்காணிப்பு, சுரங்கங்களில் பாதுகாப்பு வெடிக்கும் நடைமுறைக்கு SOP தயாரித்தல் ஆகியவற்றிற்கான தள-குறிப்பிட்ட சமன்பாட்டை உருவாக்குவதற்காக வெடிப்பு தூண்டப்பட்ட நில அதிர்வுகளை கண்காணித்தல் மற்றும் பகுப்பாய்வு செய்வதில் நிபுணருடன் தொடர்புடையது.	
4.	மௌனிகா. B	AP	தனலட்சுமி ராமநாதன்	மார்ச் 2024-முதல் மே 2024 வரை	தற்போதுள்ள காற்றின் தரம், சுற்றுப்புற காற்றில் திட்டத்தின் தாக்கம் மற்றும் காற்று மாசுபாட்டிற்கான தணிப்பு நடவடிக்கைகளை பரிந்துரைப்பதில் நிபுணருடன் தொடர்புடையது	Mounica-B
		NV	தனலட்சுமி ராமநாதன்		அதன் கணிப்பு, பறக்கும் பாறைகள் மற்றும் காற்று வெடிப்பு (சத்தம்) கண்காணிப்பு, சுரங்கங்களில் பாதுகாப்பு வெடிக்கும் நடைமுறைக்கு SOP தயாரித்தல் ஆகியவற்றிற்கான தள-குறிப்பிட்ட சமன்பாட்டை உருவாக்குவதற்காக வெடிப்பு தூண்டப்பட்ட நில அதிர்வுகளை கண்காணித்தல் மற்றும் பகுப்பாய்வு செய்வதில் நிபுணருடன் தொடர்புடையது.	
5.	G.பாலசுப்ரமணி	GEO	*வள்ளியப்பன் மெய்யப்பன்*	மார்ச் 2024-முதல் மே 2024 வரை	புவியியல் வரைபடத்தை தயாரிப்பதில் நிபுணருடன், குவாரி சரிவு முகங்கள் மற்றும் குப்பைகளின் நிலைத்தன்மையை மதிப்பீடு செய்தல், சுரங்க குவாரி மற்றும் அப்பகுதியின் புவியியல் அம்சங்களைப் பயன்படுத்திய பிறகு, சுரங்க	

					உறுதித்தன்மைக்கான மேலாண்மைத் திட்டம்	
		NV	தனலட்சுமி ராமநாதன்		அதன் கணிப்பு, பறக்கும் பாறைகள் மற்றும் காற்று வெடிப்பு (சத்தம்) கண்காணிப்பு, சுரங்கங்களில் பாதுகாப்பு வெடிக்கும் நடைமுறைக்கு SOP தயாரித்தல் ஆகியவற்றிற்கான தள-குறிப்பிட்ட சமன்பாட்டை உருவாக்குவதற்காக வெடிப்பு தூண்டப்பட்ட நில அதிர்வுகளை கண்காணித்தல் மற்றும் பகுப்பாய்வு செய்வதில் நிபுணருடன் தொடர்புடையது.	

இணைப்பு-1

File No: 10951
Government of India
Ministry of Environment, Forest and Climate Change
(Issued by the State Environment Impact Assessment Authority(SEIAA), TAMIL NADU)
***

Dated **16/07/2024**

To,

NAGARAJAN
NAGARAJAN
Thiru.V.Nagarajan, S/o. Varadharaj Gounder, No.65, Marakkanam Road, Perumukkal Village, Marakkanam Taluk, Viluppuram District., Viluppuram , VILLUPURAM, TAMIL NADU, Viluppuram , 604301
nagarajanv745@gmail.com

Subject: Grant of Terms of Reference(ToR) along with Public Hearing under the provision of the EIA Notification 2006 and as amended-regarding.

Sir/Madam,

This is in reference to your application for Grant of Terms of Reference (ToR) issued along with Public Hearing under the provision of the EIA Notification 2006-regarding in respect of project proposed Rough Stone and Gravel Quarry lease over an extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu by **Thiru. V. Nagarajan** submitted to SEIAA vide proposal number SIA/TN/MIN/473980/2024 dated 19/06/2024.

Ref:

1. Online proposal No**.** SIA/TN/MIN/473980/2024, dated:21.05.2024.
2. Your application submitted for Terms of Reference dated: 06.06.2024.

2. The particulars of the proposal are as below :

(i) TOR Identification No.	TO24B0108TN5964918N
(ii) File No.	10951
(iii) Clearance Type	TOR
(iv) Category	B1
(v) Project/Activity Included Schedule No.	1(a) Mining of minerals
(vii) Name of Project	Rough Stone and gravel Quarry of Thiru.V.Nagarajan
(viii) Name of Company/Organization	NAGARAJAN
(ix) Location of Project (District, State)	VILLUPURAM, TAMIL NADU
(x) Issuing Authority	SEIAA

(xii) Applicability of General Conditions no
(xiii) Applicability of Specific Conditions no

3. In view of the particulars given in the Para 1 above, the project proposal interalia including Form-1(Part A and B) were submitted to the SEIAA for an appraisal by the SEAC under the provision of EIA notification 2006 and its subsequent amendments.

4. The above-mentioned proposal has been considered by (SEIAA) Appraisal Committee of SEIAA in the meeting held on 09/07/2024. The minutes of the meeting and all the Application and documents submitted [(viz. Form-1 Part A, Part B,] are available on PARIVESH portal which can be accessed by scanning the QR Code above.

5. The State Expert Appraisal Committee (SEAC), based on the information & clarifications provided by the project proponent and after detailed deliberations on all technical aspects recommended the proposal for grant of Terms of Reference under the provision of EIA Notification, 2006 and as amended thereof subject to the stipulation of specific and general conditions as detailed in Annexure (2).

6. The SEIAA has examined the proposal in accordance with the Environment Impact Assessment (EIA) Notification, 2006 & further amendments thereto and after accepting the recommendations of the SEAC hereby decided to issue the following Terms of Reference for instant proposal of Thiru.NAGARAJAN Granites under the provisions of EIA Notification, 2006 and as amended thereof.

7. The Ministry/SEIAA-TN reserves the right to stipulate additional conditions, if found necessary.

8. The Terms of Reference to the aforementioned project is under provisions of EIA Notification, 2006. It does not tantamount to approvals/consent/permissions etc. required to be obtained under any other Act/Rule/regulation. The Project Proponent is under obligation to obtain approvals /clearances under any other Acts/ Regulations or Statutes, as applicable, to the project.

9. This issues with the approval of the Competent Authority.

10. The TORs with public hearing prescribed shall be **valid for a period of three years** from the date of issue, for submission of the EIA/EMP report as per OMNo.J-11013/41/2006-IA-II(I)(part) dated 29th August, 2017.

Copy To

1. The Additional Chief Secretary to Government, Environment & Forests Department, Govt. of Tamil Nadu, Fort St. George, Chennai - 9
2. The Chairman, Central Pollution Control Board, Parivesh Bhavan, CBD Cum-Office Complex, East Arjun Nagar, New Delhi 110032.
3. The Member Secretary, Tamil Nadu Pollution Control Board, 76, Mount Salai, Guindy, Chennai-600 032.
4. Monitoring Cell, IA Division, Ministry of Environment, Forests &CC, Paryavaran Bhavan, CGO Complex, New Delhi 110003
5. The District Collector, Viluppuram District.
6. Stock File.

Annexure 1

Specific Terms of Reference for (Mining Of Minerals)

1. Seiaa Specific Conditions:

S. No	Terms of Reference
1.1	After detailed discussions, the Authority accepts the recommendation of SEAC and decided to grant

S. No	Terms of Reference
	Terms of Reference (ToR) along with Public Hearing under cluster for undertaking the combined Environment Impact Assessment Study and preparation of separate Environment Management Plan subject to the conditions as recommended by SEAC, standard conditions stipulated by MoEF&CC and with the Specific and Standard Conditions. i) Considering the water bodies situated around the project site, Terms of reference is accorded for the **restricted depth of 33m below the ground level**. The proponent shall furnish the revised mining plan accordingly.

2. Seac Conditions - Site Specific

S. No	Terms of Reference
2.1	1. **A Cluster Management Committee (CMC) shall be constituted including all the mines in the cluster as Committee Members for the effective management of the mining operation in the cluster through systematic & scientific approach with appointment of statutory personnel, appropriate environmental monitoring, good maintenance of haul roads and village/panchayat roads, authorized blasting operation etc. The PP shall submit the following details in the form of an Affidavit during the EIA appraisal:** **(i) Copy of the agreement forming CMC.** **(ii) The Organisation chart of the Committee with defining the role of the members** **(iii) The 'Standard Operating Procedures' (SoP) executing the planned activities**. 2. The proponent shall make necessary application to produce the NOC from the Competent Authority under the provisions of the Central Electricity Authority Notification No. CEA-PS-16/1/2021-CEI Division dt 08.07.2023 at the time of lease execution. 3. Since waterbodies are situated nearby, the PP shall carry out the scientific studies to assess the hydrogeological condition of the quarry to determine impacts of the mining operation on the ground water conditions in the waterbodies. 4. The structures within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m & upto 1km shall be enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc. and spell out the mitigation measures to be proposed for the protection of the above structures, if any during the quarrying operations. 5. The proponent shall furnish photographs of adequate fencing, garland drainage built with siltation tank & green belt along the periphery including replantation of existing trees; maintaining the safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan. 6. The Proponent shall carry out Bio diversity study as a part of EIA study and the same shall be included in the Report. 7. The PP shall prepare the EMP for the entire project life of mine, i.e, 10 years and also furnish the sworn affidavit stating to abide the EMP for the entire life of mine. 8. The proponent shall furnish the affidavit regarding the existence of a 'pit' in the proposed mine leasehold area. 9. The PP shall carry out the comprehensive studies on the cumulative environmental impacts of the existing & proposed quarries which included drilling & blasting, loading & hauling on the surrounding village and structures.

3. Seac Standard Conditions

S. No	Terms of Reference
3.1	1. In the case of existing/operating mines, a letter obtained from the concerned AD (Mines) shall be submitted and it shall include the following: (i) Original pit dimension (ii) Quantity achieved Vs EC Approved Quantity (iii) Balance Quantity as per Mineable Reserve calculated. (iv) Mined out Depth as on date Vs EC Permitted depth (v) Details of illegal/illicit mining (vi) Violation in the quarry during the past working. (vii) Quantity of material mined out outside the mine lease area (viii) Condition of Safety zone/benches (ix) Revised/Modified Mining Plan showing the benches of not exceeding 6 m height and ultimate depth of not exceeding 50m. 2. Details of habitations around the proposed mining area and latest VAO certificate regarding the location of habitations within 300m radius from the periphery of the site. 3. The proponent is requested to carry out a survey and enumerate on the structures located within the radius of (i) 50 m, (ii) 100 m, (iii) 200 m and (iv) 300 m (v) 500m shall be enumerated with details such as dwelling houses with number of occupants, whether it belongs to the owner (or) not, places of worship, industries, factories, sheds, etc with indicating the owner of the building, nature of construction, age of the building, number of residents, their profession and income, etc. 4. The PP shall submit a detailed hydrological report indicating the impact of proposed quarrying operations on the waterbodies like lake, water tanks, etc are located within 1 km of the proposed quarry. 5. The Proponent shall carry out Bio diversity study through reputed Institution and the same shall be included in EIA Report. 6. The DFO letter stating that the proximity distance of Reserve Forests, Protected Areas, Sanctuaries, Tiger reserve etc., up to a radius of 25 km from the proposed site. 7. In the case of proposed lease in an existing (or old) quarry where the benches are not formed (or) partially formed as per the approved Mining Plan, the Project Proponent (PP) shall the PP shall carry out the scientific studies to assess the slope stability of the working benches to be constructed and existing quarry wall, by involving any one of the reputed Research and Academic Institutions - CSIR-Central Institute of Mining & Fuel Research / Dhanbad, NIRM/Bangalore, Division of Geotechnical Engineering-IIT-Madras, NIT-Dept of Mining Engg, Surathkal, and Anna University Chennai-CEG Campus. The PP shall submit a copy of the aforesaid report indicating the stability status of the quarry wall and possible mitigation measures during the time of appraisal for obtaining the EC. 8. However, in case of the fresh/virgin quarries, the Proponent shall submit a conceptual 'Slope Stability Plan' for the proposed quarry during the appraisal while obtaining the EC, when the depth of the working is extended beyond 30 m below ground level. 9. The PP shall furnish the affidavit stating that the blasting operation in the proposed quarry is carried out by the statutory competent person as per the MMR 1961 such as blaster, mining mate, mine foreman, II/I Class mines manager appointed by the proponent. 10. The PP shall present a conceptual design for carrying out only controlled blasting operation involving line drilling and muffle blasting in the proposed quarry such that the blast-induced ground vibrations are controlled as well as no fly rock travel beyond 30 m from the blast site. 11. The EIA Coordinators shall obtain and furnish the details of quarry/quarries operated by the proponent in the past, either in the same location or elsewhere in the State with video and photographic evidences. 12. If the proponent has already carried out the mining activity in the proposed mining lease area after 15.01.2016, then the proponent shall furnish the following details from AD/DD, mines, 13. What was the period of the operation and stoppage of the earlier mines with last work permit

S. No	Terms of Reference
	issued by the AD/DD mines? 14. Quantity of minerals mined out. · Highest production achieved in any one year · Detail of approved depth of mining. · Actual depth of the mining achieved earlier. · Name of the person already mined in that leases area. · If EC and CTO already obtained, the copy of the same shall be submitted. · Whether the mining was carried out as per the approved mine plan (or EC if issued) with stipulated benches. 15. All corner coordinates of the mine lease area, superimposed on a High-Resolution Imagery/Topo sheet, topographic sheet, geomorphology, lithology and geology of the mining lease area should be provided. Such an Imagery of the proposed area should clearly show the land use and other ecological features of the study area (core and buffer zone). 16. The PP shall carry out Drone video survey covering the cluster, green belt, fencing, etc., 17. The proponent shall furnish photographs of adequate fencing, green belt along the periphery including replantation of existing trees & safety distance between the adjacent quarries & water bodies nearby provided as per the approved mining plan. 18. The Project Proponent shall provide the details of mineral reserves and mineable reserves, planned production capacity, proposed working methodology with justifications, the anticipated impacts of the mining operations on the surrounding environment, and the remedial measures for the same. 19. The Project Proponent shall provide the Organization chart indicating the appointment of various statutory officials and other competent persons to be appointed as per the provisions of the Mines Act'1952 and the MMR, 1961 for carrying out the quarrying operations scientifically and systematically in order to ensure safety and to protect the environment. 20. The Project Proponent shall conduct the hydro-geological study considering the contour map of the water table detailing the number of groundwater pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds, etc. within 1 km (radius) along with the collected water level data for both monsoon and non-monsoon seasons from the PWD / TWAD so as to assess the impacts on the wells due to mining activity. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided. 21. The proponent shall furnish the baseline data for the environmental and ecological parameters with regard to surface water/ground water quality, air quality, soil quality & flora/fauna including traffic/vehicular movement study. 22. The Proponent shall carry out the Cumulative impact study due to mining operations carried out in the quarry specifically with reference to the specific environment in terms of soil health, biodiversity, air pollution, water pollution, climate change and flood control & health impacts. Accordingly, the Environment Management plan should be prepared keeping the concerned quarry and the surrounding habitations in the mind. 23. Rain water harvesting management with recharging details along with water balance (both monsoon & non-monsoon) be submitted. 24. Land use of the study area delineating forest area, agricultural land, grazing land, wildlife sanctuary, national park, migratory routes of fauna, water bodies, human settlements and other ecological features should be indicated. Land use plan of the mine lease area should be prepared to encompass preoperational, operational and post operational phases and submitted. Impact, if any, of change of land use should be given. 25. Details of the land for storage of Overburden/Waste Dumps (or) Rejects outside the mine lease, such as extent of land area, distance from mine lease, its land use, R&R issues, if any, should be provided. 26. Proximity to Areas declared as 'Critically Polluted' (or) the Project areas which attracts the court restrictions for mining operations, should also be indicated and where so required,

S. No	Terms of Reference
	clearance certifications from the prescribed Authorities, such as the TNPCB (or) Dept. of Geology and Mining should be secured and furnished to the effect that the proposed mining activities could be considered. 27. Description of water conservation measures proposed to be adopted in the Project should be given. Details of rainwater harvesting proposed in the Project, if any, should be provided. 28. Impact on local transport infrastructure due to the Project should be indicated. 29. A tree survey study shall be carried out (nos., name of the species, age, diameter etc.,) both within the mining lease applied area & 300m buffer zone and its management during mining activity. 30. A detailed mine closure plan for the proposed project shall be included in EIA/EMP report which should be site-specific. 31. As a part of the study of flora and fauna around the vicinity of the proposed site, the EIA coordinator shall strive to educate the local students on the importance of preserving local flora and fauna by involving them in the study, wherever possible. 32. The purpose of Green belt around the project is to capture the fugitive emissions, carbon sequestration and to attenuate the noise generated, in addition to improving the aesthetics. A wide range of indigenous plant species should be planted as given in the appendix-I in consultation with the DFO, State Agriculture University. The plant species with dense/moderate canopy of native origin should be chosen. Species of small/medium/tall trees alternating with shrubs should be planted in a mixed manner. 33. Taller/one year old Saplings raised in appropriate size of bags, preferably ecofriendly bags should be planted as per the advice of local forest authorities/botanist/Horticulturist with regard to site specific choices. The proponent shall earmark the greenbelt area with GPS coordinates all along the boundary of the project site with at least 3 meters wide and in between blocks in an organized manner 34. A Disaster management Plan shall be prepared and included in the EIA/EMP Report for the complete life of the proposed quarry (or) till the end of the lease period. 35. A Risk Assessment and management Plan shall be prepared and included in the EIA/EMP Report for the complete life of the proposed quarry (or) till the end of the lease period. 36. Occupational Health impacts of the Project should be anticipated and the proposed preventive measures spelt out in detail. Details of pre-placement medical examination and periodical medical examination schedules should be incorporated in the EMP. The project specific occupational health mitigation measures with required facilities proposed in the mining area may be detailed. 37. Public health implications of the Project and related activities for the population in the impact zone should be systematically evaluated and the proposed remedial measures should be detailed along with budgetary allocations. 38. The Socio-economic studies should be carried out within a 5 km buffer zone from the mining activity. Measures of socio-economic significance and influence to the local community proposed to be provided by the Project Proponent should be indicated. As far as possible, quantitative dimensions may be given with time frames for implementation. 39. Details of litigation pending against the project, if any, with direction /order passed by any Court of Law against the Project should be given. 40. Benefits of the Project if the Project is implemented should be spelt out. The benefits of the Project shall clearly indicate environmental, social, economic, employment potential, etc. 41. If any quarrying operations were carried out in the proposed quarrying site for which now the EC is sought, the Project Proponent shall furnish the detailed compliance to EC conditions given in the previous EC with the site photographs which shall duly be certified by MoEF&CC, Regional Office, Chennai (or) the concerned DEE/TNPCB. 42. The PP shall prepare the EMP for the entire life of mine and also furnish the sworn affidavit stating to abide the EMP for the entire life of mine. Concealing any factual information or submission of false/fabricated data and failure to comply

S. No	Terms of Reference
	with any of the conditions mentioned above may result in withdrawal of this Terms of Conditions besides attracting penal provisions in the Environment (Protection) Act, 1986.

4. Seiaa Standard Conditions:

S. No	Terms of Reference
4.1	**<u>Cluster Management Committee</u>** 1. Cluster Management Committee shall be framed which must include all the proponents in the cluster as members including the existing as well as proposed quarry. 2. The members must coordinate among themselves for the effective implementation of EMP as committed including Green Belt Development, Water sprinkling, tree plantation, blasting etc., 3. The List of members of the committee formed shall be submitted to AD/Mines before the execution of mining lease and the same shall be updated every year to the AD/Mines. 4. Detailed Operational Plan must be submitted which must include the blasting frequency with respect to the nearby quarry situated in the cluster, the usage of haul roads by the individual quarry in the form of route map and network. 5. The committee shall deliberate on risk management plan pertaining to the cluster in a holistic manner especially during natural calamities like intense rain and the mitigation measures considering the inundation of the cluster and evacuation plan. 6. The Cluster Management Committee shall form Environmental Policy to practice sustainable mining in a scientific and systematic manner in accordance with the law. The role played by the committee in implementing the environmental policy devised shall be given in detail. 7. The committee shall furnish action plan regarding the restoration strategy with respect to the individual quarry falling under the cluster in a holistic manner. 8. The committee shall furnish the Emergency Management plan within the cluster. 9. The committee shall deliberate on the health of the workers/staff involved in the mining as well as the health of the public. 10. The committee shall furnish an action plan to achieve sustainable development goals with reference to water, sanitation & safety. 11. The committee shall furnish the fire safety and evacuation plan in the case of fire accidents. **<u>Impact study of mining</u>** 12. Detailed study shall be carried out in regard to impact of mining around the proposed mine lease area covering the entire mine lease period as per precise area communication order issued from reputed research institutions on the following a) Soil health & soil biological, physical land chemical features . b) Climate change leading to Droughts, Floods etc. c) Pollution leading to release of Greenhouse gases (GHG), rise in Temperature, & Livelihood of the local people. d) Possibilities of water contamination and impact on aquatic ecosystem health. e) Agriculture, Forestry & Traditional practices. f) Hydrothermal/Geothermal effect due to destruction in the Environment. g) Bio-geochemical processes and its foot prints including environmental stress. h) Sediment geochemistry in the surface streams. **<u>Agriculture & Agro-Biodiversity</u>** 13. Impact on surrounding agricultural fields around the proposed mining Area. 14. Impact on soil flora & vegetation around the project site. 15. Details of type of vegetations including no. of trees & shrubs within the proposed mining area and. If so, transplantation of such vegetations all along the boundary of the proposed mining area shall committed mentioned in EMP. 16. The Environmental Impact Assessment should study the biodiversity, the natural ecosystem, the

S. No	Terms of Reference
	soil micro flora, fauna and soil seed banks and suggest measures to maintain the natural Ecosystem. 17. Action should specifically suggest for sustainable management of the area and restoration of ecosystem for flow of goods and services. 18. The project proponent shall study and furnish the impact of project on plantations in adjoining patta lands, Horticulture, Agriculture and livestock. **Forests** 19. The project proponent shall detailed study on impact of mining on Reserve forests free ranging wildlife. 20. The Environmental Impact Assessment should study impact on forest, vegetation, endemic, vulnerable and endangered indigenous flora and fauna. 21. The Environmental Impact Assessment should study impact on standing trees and the existing trees should be numbered and action suggested for protection. 22. The Environmental Impact Assessment should study impact on protected areas, Reserve Forests, National Parks, Corridors and Wildlife pathways, near project site. **Water Environment** 23. Hydro-geological study considering the contour map of the water table detailing the number of ground water pumping & open wells, and surface water bodies such as rivers, tanks, canals, ponds etc. within 1 km (radius) so as to assess the impacts on the nearby waterbodies due to mining activity. Based on actual monitored data, it may clearly be shown whether working will intersect groundwater. Necessary data and documentation in this regard may be provided, covering the entire mine lease period. 24. Erosion Control measures. 25. Detailed study shall be carried out in regard to impact of mining around the proposed mine lease area on the nearby Villages, Water-bodies/ Rivers, & any ecological fragile areas. 26. The project proponent shall study impact on fish habitats and the food WEB/ food chain in the water body and Reservoir. 27. The project proponent shall study and furnish the details on potential fragmentation impact on natural environment, by the activities. 28. The project proponent shall study and furnish the impact on aquatic plants and animals in water bodies and possible scars on the landscape, damages to nearby caves, heritage site, and archaeological sites possible land form changes visual and aesthetic impacts. 29. The Terms of Reference should specifically study impact on soil health, soil erosion, the soil physical, chemical components and microbial components. 30. The Environmental Impact Assessment should study on wetlands, water bodies, rivers streams, lakes and farmer sites. **Energy** 31. The measures taken to control Noise, Air, Water, Dust Control and steps adopted to efficiently utilise the Energy shall be furnished. **Climate Change** 32. The Environmental Impact Assessment shall study in detail the carbon emission and also suggest the measures to mitigate carbon emission including development of carbon sinks and temperature reduction including control of other emission and climate mitigation activities. 33. The Environmental Impact Assessment should study impact on climate change, temperature rise, pollution and above soil & below soil carbon stock. **Mine Closure Plan** 34. Detailed Mine Closure Plan covering the entire mine lease period as per precise area communication order issued. **EMP** 35. Detailed Environment Management Plan along with adaptation, mitigation & remedial strategies covering the entire mine lease period as per precise area communication order issued. 36. The Environmental Impact Assessment should hold detailed study on EMP with budget for Green belt development and mine closure plan including disaster management plan.

S. No	Terms of Reference
	Risk Assessment 37. To furnish risk assessment and management plan including anticipated vulnerabilities during operational and post operational phases of Mining. **Disaster Management Plan** 38. To furnish disaster management plan and disaster mitigation measures in regard to all aspects to avoid/reduce vulnerability to hazards & to cope with disaster/untoward accidents in &around the proposed mine lease area due to the proposed method of mining activity & its related activities covering the entire mine lease period as per precise area communication order issued. **Others** 39. The project proponent shall furnish VAO certificate with reference to 300m radius regard to approved habitations, schools, Archaeological sites, Structures, railway lines, roads, water bodies such as streams, odai, vaari, canal, channel, river, lake pond, tank etc. 40. As per the MoEF& CC office memorandum F.No.22-65/2017-IA.III dated: 30.09.2020 and 20.10.2020 the proponent shall address the concerns raised during the public consultation and all the activities proposed shall be part of the Environment Management Plan. 41. The project proponent shall study and furnish the possible pollution due to plastic and microplastic on the environment. The ecological risks and impacts of plastic &microplastics on aquatic environment and fresh water systems due to activities, contemplated during mining may be investigated and reported.

Standard Terms of Reference for (Mining of minerals)

1.

S. No	Terms of Reference
1.1	An EIA-EMP Report shall be prepared for peak capacity (…..MTPA)operation in an ML/project area of.....ha based on the generic structure specified in Appendix III of the EIA Notification, 2006.
1.2	An EIA-EMP Report would be prepared for peak capacity operation to cover the impacts and environment management plan for the project specific activities on the environment of the region, and the environmental quality encompassing air, water, land, biotic community, etc. through collection of data and information, generation of data on impacts including prediction modeling for..... MTPA of mineral production based on approved project/Mining Plan for.....MTPA. Baseline data collection can be for any season (three months) except monsoon.
1.3	Propoer KML file with pin drop and coordinate of mine at 500-1000 m interval be provided
1.4	A Study area map of the core zone (project area) and 10 km area of the buffer zone (1: 50,000 scale) clearly delineating the major topographical features such as the land use, surface drainage pattern including rivers/streams/nullahs/canals, locations of human habitations, major constructions including railways, roads, pipelines, major industries, mines and other polluting sources. In case of ecologically sensitive areas such as Biosphere Reserves/National Parks/WL Sanctuaries/ Elephant Reserves, forests (Reserved/Protected), migratory corridors of fauna, and areas where endangered fauna and plants of medicinal and economic importance found in the 15 km study area should be given. The above details to be furnished in tabular form also
1.5	Map showing the core zone delineating the agricultural land (irrigated and un-irrigated, uncultivable land as defined in the revenue records, forest areas (as per records), along with other physical

S. No	Terms of Reference
	features such as water bodies, etc should be furnished.
1.6	A contour map showing the area drainage of the core zone and 25 km of the study area (where the water courses of the core zone ultimately join the major rivers/streams outside the lease/project area) should also be clearly indicated in the separate map.
1.7	Catchment area with its drainage map of 25 km area within and outside the mine shall be provided with names, details of rivers/ riverlet system and its respective order. The map should clearly indicate drainage pattern of the catchment area with basin of major rivers. Diversion of drains/ river need eloboration in form of lengthe, quantity and quality of water to be diverted
1.8	(Details of mineral reserves, geological status of the study area and the seams to be worked, ultimate working depth and progressive stage-wise working scheme until the end of mine life should be provided on the basis of the approved rated capacity and calendar plans of production from the approved Mining Plan. Geological maps and sections should be included. The Progressive mine development and Conceptual Final Mine Closure Plan should also be shown in figures. Details of mine plan and mine closure plan approval of Competent Authority should be furnished for green field and expansion projects.
1.9	Details of mining methods, technology, equipment to be used, etc., rationale for selection of specified technology and equipment proposed to be used vis-à-vis the potential impacts should be provided.
1.10	Impact of mining on hydrology, modification of natural drainage, diversion and channeling of the existing rivers/water courses flowing though the ML and adjoining the lease/project and the impact on the existing users and impacts of mining operations thereon.
1.11	A detailed Site plan of the mine showing the proposed break-up of the land for mining operations such as the quarry area, OB dumps, green belt, safety zone, buildings, infrastructure, Stockyard, township/colony (within and adjacent to the ML), undisturbed area -if any, and landscape features such as existing roads, drains/natural water bodies to be left undisturbed along with any natural drainage adjoining the lease /project areas, and modification of thereof in terms of construction of embankments/bunds, proposed diversion/re-channelling of the water courses, etc., approach roads, major haul roads, etc should be indicated.
1.12	Original land use (agricultural land/forestland/grazing land/wasteland/water bodies) of the area should be provided as per the tables given below. Impacts of project, if any on the land use, in particular, agricultural land/forestland/grazing land/water bodies falling within the lease/project and acquired for mining operations should be analyzed. Extent of area under surface rights and under mining rights should be specified. Area under Surface Rights S.N ML/Project Land use Area under Surface Rights(ha) Area Under Mining Rights(ha) Area under Both (ha) 1 Agricultural land 2 Forest Land 3 Grazing Land 4 Settlements 5 Others (specify)

S. No	Terms of Reference
	S.N. Details Area (ha) 1 Buildings 2 Infrastructure 3 Roads 4 Others (specify) Total
1.13	Study on the existing flora and fauna in the study area (10km) should be carried out by an institution of relevant discipline. The list of flora and fauna duly authenticated separately for the core and study area and a statement clearly specifying whether the study area forms a part of the migratory corridor of any endangered fauna should be given. If the study area has endangered flora and fauna, or if the area is occasionally visited or used as a habitat by Schedule-I species, or if the project falls within 15 km of an ecologically sensitive area, or used as a migratory corridor then a Comprehensive Conservation Plan along with the appropriate budgetary provision should be prepared and submitted with EIA-EMP Report; and comments/observation from the CWLW of the State Govt. should also be obtained and furnished.
1.14	One-season (other than monsoon) primary baseline data on environmental quality - air (PM10, PM2.5, SOx, NOx and heavy metals such as Hg, Pb, Cr, As, etc), noise, water (surface and groundwater), soil - along with one-season met data coinciding with the same season for AAQ collection period should be provided. The detail of NABL/ MoEF&CC certification of the respective laborartory and NABET accreditation of the consultant to be provided.
1.15	Map (1: 50, 000 scale) of the study area (core and buffer zone) showing the location of various sampling stations superimposed with location of habitats, other industries/mines, polluting sources, should be provided. The number and location of the sampling stations in both core and buffer zones should be selected on the basis of size of lease/project area, the proposed impacts in the downwind (air)/downstream (surface water)/groundwater regime (based on flow). One station should be in the upwind/upstream/non-impact/non-polluting area as a control station. The monitoring should be as per CPCB guidelines and parameters for water testing for both ground water and surface water as per ISI standards and CPCB classification wherever applicable. Observed values should be provided along with the specified standards.
1.16	For proper baseline air quality assessment, Wind rose pattern in the area should be reviewed and accordingly location of AAMSQ shall be planned by the collection of air quality data by adequate monitoring stations in the downwind areas. Monitoring location for collecting baseline data should cover overall the 10 km buffer zone i.e. dispersed in 10 km buffer area. In case of expansion, the displayed data of CAAQMS and its comparison with the monitoring data to be provided
1.17	A detailed traffic study along with presence of habitation in 100 mts distance from both side of road, the impact on the air quality with its proper measures and plan of action with timeline for widening of road. The project will increase the no. of vehicle along the road which will indirectly contribute to carbon emission so what will be the compensatory action plan should be clearly spell out in EIA/ EMP report.
1.18	The socio-economic study to conducted with actual survey report and a comparative assessment to be provided from the census data should be provided in EIA/ EMP report also occupational status & economic status of the study area and what economically project will contribute should be clearly

S. No	Terms of Reference
	mention. The study should also include the status of infrastructural facilities and amenities present in the study area and a comparative assessment with census data to be provided and to link it with the initialization and quantification of need based survey for CSR activities to be followed.
1.19	The Ecology and biodiversity study should also indicate the likely impact of change in forest area for surface infrastructural development or mining activity in relation to the climate change of that area and what will be the compensatory measure to be adopted by PP to minimize the impact of forest diversion.
1.20	Baseline data on the health of the population in the impact zone and measures for occupational health and safety of the personnel and manpower for the mine should be submitted.
1.21	Impact of proposed project/activity on hydrological regime of the area shall be assessed and report be submitted. Hydrological studies as per GEC 2015 guidelines to be prepared and submitted
1.22	Impact of mining and water abstraction from the mine on the hydrogeology and groundwater regime within the core zone and 10 km buffer zone including long-term monitoring measures should be provided. Details of rainwater harvesting and measures for recharge of groundwater should be reflected in case there is a declining trend of groundwater availability and/or if the area falls within dark/grey zone.
1.23	Study on land subsidence including modeling for prediction, mitigation/prevention of subsidence, continuous monitoring measures, and safety issues should be carried out.
1.24	Detailed water balance should be provided. The break up of water requirement as per different activities in the mining operations, including use of water for sand stowing should be given separately. Source of water for use in mine, sanction of the Competent Authority in the State Govt. and impacts vis-à-vis the competing users should be provided.
1.25	PP shall submit design details of all Air Pollution control equipment (APCEs) to be implemented as part of Environment Management Plan vis-à-vis reduction in concentration of emission for each APCEs
1.26	PP shall propose to use LNG/CNG based mining machineries and trucks for mining operation and transportation of mineral. The measures adopted to conserve energy or use of renewable sources shall be explored
1.27	PP to evaluate the green house emission gases from the mine operation and corresponding carbon absorption plan.
1.28	Site specific Impact assessment with its mitigation measures, Risk Assessment and Disaster Preparedness and Management Plan should be provided.
1.29	Impact of choice of mining method, technology, selected use of machinery and impact on air quality, mineral transportation, handling & storage/stockyard, etc, Impact of blasting, noise and vibrations should be provided.
1.30	Impacts of mineral transportation within the mining area and outside the lease/project along with flow-chart indicating the specific areas generating fugitive emissions should be provided. Impacts of transportation, handling, transfer of mineral and waste on air quality, generation of effluents from

S. No	Terms of Reference
	workshop etc, management plan for maintenance of HEMM and other machinery/equipment should be given. Details of various facilities such as rest areas and canteen for workers and effluents/pollution load emanating from these activities should also be provided.
1.31	Details of various facilities to be provided to the workers in terms of parking, rest areas and canteen, and effluents/pollution load resulting from these activities should also be given.
1.32	The number and efficiency of mobile/static water jet, Fog cannon sprinkling system along the main mineral transportation road inside the mine, approach roads to the mine/stockyard/siding, and also the frequency of their use in impacting air quality should be provided.
1.33	Conceptual Final Mine Closure Plan and post mining land use and restoration of land/habitat to the pre- mining status should be provided. A Plan for the ecological restoration of the mined out area and post mining land use should be prepared with detailed cost provisions. Impact and management of wastes and issues of re-handling (wherever applicable) and backfilling and progressive mine closure and reclamation should be furnished.
1.34	Adequate greenbelt nearby areas, mineral stock yard and transportation area of mineral shall be provided with details of species selected and survival rate Greenbelt development should be undertaken particularly around the transport route.
1.35	Cost of EMP (capital and recurring) should be included in the project cost and for progressive and final mine closure plan.
1.36	Details of R&R. Detailed project specific R&R Plan with data on the existing socio- economic status of the population (including tribals, SC/ST, BPL families) found in the study area and broad plan for resettlement of the displaced population, site for the resettlement colony, alternate livelihood concerns/employment for the displaced people, civic and housing amenities being offered, etc and costs along with the schedule of the implementation of the R&R Plan should be given.
1.37	CSR Plan along with details of villages and specific budgetary provisions (capital and recurring) for specific activities over the life of the project should be given.
1.38	Corporate Environment Responsibility:
1.39	a) The Company must have a well laid down Environment Policy approved by the Board of Directors.
1.40	b) The Environment Policy must prescribe for standard operating process/procedures to bring into focus any infringements/deviation/violation of the environmental or forest norms/conditions.
1.41	c) The hierarchical system or Administrative Order of the company to deal with environmental issues and for ensuring compliance with the environmental clearance conditions must be furnished.
1.42	d) To have proper checks and balances, the company should have a well laid down system of reporting of non-compliances/violations of environmental norms to the Board of Directors of the company and/or shareholders or stakeholders at large.
1.43	e) Environment Managament Cell and its responsibilities to be clearly spleel out in EIA/ EMP

S. No	Terms of Reference
	report
1.44	f) In built mechanism of self-monitoring of compliance of environmental regulations should be indicated.
1.45	Status of any litigations/ court cases filed/pending on the project should be provided.
1.46	PP shall submit clarification from PCCF that mine does not falls under corridors of any National Park and Wildlife Sanctuary with certified map showing distance of nearest sanctuary.
1.47	Copy of clearances/approvals such as Forestry clearances, Mining Plan Approval, mine closer plan approval. NOC from Flood and Irrigation Dept. (if req.), etc. wherever applicable.
1.48	Details on the Forest Clearance should be given as per the format given: Total Project Area (ha) | ML Total Forest land (ha) If more than one provide details of each FC | Date of FC | Extent of Forest Land | Balance area for which FC is yet to be obtained | Status of appl For diversion of forest land
1.49	In case of expansion of the proposal, the status of the work done as per mining plan and approved mine closure plan shall be detailed in EIA/ EMP report
1.50	Details on Public Hearing should cover the information relating to notices issued in the newspaper, proceedings/minutes of Public Hearing, the points raised by the general public and commitments made by the proponent and the time bound action proposed with budgets in suitable time frame. These details should be presented in a tabular form. If the Public Hearing is in the regional language, an authenticated English Translation of the same should be provided.
1.51	PP shall carry out survey through drone highlighting the ground reality for atleast 10 minutes
1.52	Detailed Chronology of the project starting from the first lease deed alloted/Block allotment/ Land acquired to its No. of renewals, CTO /CTE with details of no. renewals, previous EC(s) granted details and its compliance details, NOC details from various Govt bodies like Forest NOC(s), CGWA permissions, Power permissions, etc as per the requisites respectively to be furnished in tabular form.
1.53	The first page of the EIA/ EMP report must mention the peak capacity production, area, detail of PP, Consultant (NABET acrreditation) and Laboratory (NABL / MoEF & CC certification)
1.54	The compliances of ToR must be properly cited with respective chapter section and page no in tabular form and also mention sequence of the respective ToR complied within the EIA-EMP report in all the chapter,s section.

இணைப்பு-2

ANNEXURE 1

- 6 MAR 2024

நா.க.எண். அ/பு & சு/96/2021
நாள்: 02.02.2024

உதவி இயக்குநர்,
புவியியல் மற்றும் சுரங்கத்துறை அலுவலகம்,
விழுப்புரம்.

குறிப்பாணை

பொருள்: கனிமங்களும் குவாரிகளும் - சிறுகனிமம் - சாதாரண கற்கள் மற்றும் கிராவல் - விழுப்புரம் மாவட்டம் - மரக்காணம் வட்டம் - நல்முக்கல் கிராமம் - பட்டா புல எண்கள்.34/1B1, 35/2B, 35/3, மற்றும் 35/4 ஆகியவற்றில் 4.75.00 ஹெக்டேர் பரப்பளவில் பத்தாண்டுகளுக்கு சாதாரண கற்கள் மற்றும் கிராவல் வெட்டியெடுக்க குவாரி குத்தகை அனுமதி கோரி திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் - பெருமுக்கல் கிராமம் என்பவர் விண்ணப்பம் செய்தது - உரிமம் வழங்க பரிந்துரை செய்து அறிக்கை வரப்பெற்றது - தகுதியான நிலப்பரப்பாக கருதி ஏற்பளிக்கப்பட்ட சுரங்க திட்டம் மற்றும் சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணைய இசைவினை பெற்று சமர்பிக்கக் கோருதல் - தொடர்பாக.

பார்வை:
1. திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர், எண்.65, மரக்காணம் ரோடு, பெருமுக்கல் கிராமம், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம் என்பவரின் விண்ணப்பம் நாள்.15.04.2021.
2. சார் ஆட்சியர், திண்டிவனம் அவர்களின் கடித எண். ந.க. அ3/6969/2021, நாள்: 30.10.2023.
3. விழுப்புரம் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை உதவி இயக்குநர் அவர்களின் புலத்தணிக்கை அறிக்கை நாள்: 13.12.2023.

----000----

விழுப்புரம் மாவட்டம், மரக்காணம் வட்டம், பெருமுக்கல் கிராமத்தைச் சேர்ந்த திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் என்பவர் விழுப்புரம் மாவட்டம், மரக்காணம் வட்டம், நல்முக்கல் கிராமம், பட்டா புல எண்கள். 34/1B1 - 2.43.0 ஏர்ஸ், 35/2B - 0.28.0 ஏர்ஸ், 35/3 -0.88.0 ஏர்ஸ் மற்றும் 35/4 -1.16.0 ஏர்ஸ் ஆகியவற்றில் 4.75.00 ஹெக்டேர் பரப்பளவில் உள்ள நிலத்தில் பத்தாண்டுகளுக்கு சாதாரண கற்கள் மற்றும் கிராவல் வெட்டியெடுக்க குவாரி குத்தகை பார்வை 1-ல் காணும் விண்ணப்பத்தினை சமர்ப்பித்துள்ளார்.

மேற்படி விண்ணப்பம் தொடர்பாக, திண்டிவனம் சார்ஆட்சியர் மற்றும் விழுப்புரம் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை, உதவி இயக்குநர் ஆகியோரின் அறிக்கையில் மரக்காணம் வட்டம், நல்முக்கல் கிராமம், பட்டா புல எண்கள். 34/1B1 - 2.43.0 ஏர்ஸ், 35/2B - 0.28.0 ஏர்ஸ், 35/3 -0.88.0 ஏர்ஸ் மற்றும் 35/4 -1.16.0 ஏர்ஸ் ஆக மொத்த பரப்பு 4.75.00

ஹெக்டேர் பரப்பளவில் உள்ள பட்டா நிலத்தில் திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் என்பவருக்கு பத்தாண்டுகளுக்கு சாதாரணக்கல் மற்றும் கிராவல் குவாரி உரிமம் வழங்க கீழ்கண்ட நிபந்தனைகளுக்குட்பட்டு அனுமதி வழங்கலாம் என பரிந்துரை செய்துள்ளனர்.

i. விண்ணப்ப புலன்களின் அருகில் உள்ள பட்டா நிலங்களுக்கு 7.5 மீட்டர் பாதுகாப்பு இடைவெளியும் மற்றும் அரசு புறம்போக்கு நிலங்களுக்கு 10 மீட்டர் பாதுகாப்பு இடைவெளியும் விட்டு குவாரிப்பணி மேற்கொள்ளப்பட வேண்டும்.

ii. குவாரிப்பணி மேற்கொள்ளும் போது அருகிலுள்ள அரசு புறம்போக்கு, வாய்க்கால் மற்றும் பட்டா நிலங்களுக்கு எவ்வித இடையூறும் இல்லாமல் குவாரிப்பணி செய்ய வேண்டும்.

iii. குவாரி குத்தகை வழங்கும் முன்பு விண்ணப்பித்துள்ள இடத்தினை DGPS சர்வே பணி மேற்கொண்டு அதன் அறிக்கையை சமர்பிக்க வேண்டும்.

iv. தமிழ்நாடு சிறுகனிம சலுகை விதிகள் 1959 விதி-41ன்படி தகுதிவாய்ந்த நபரால் சுரங்க திட்டம் தயார் செய்து உதவி இயக்குநர் அவர்களின் ஒப்புதல் பெறவேண்டும்.

v. தமிழ்நாடு சிறுகனிம சலுகை விதிகள் 1959 விதி-42ன்படி மாநில சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணையத்திடமிருந்து சுற்றுச்சூழல் சான்று பெற்று சமர்பிக்கப்படவேண்டும்.

எனவே, திண்டிவனம் சார் ஆட்சியர் மற்றும் விழுப்புரம் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை, உதவி இயக்குநர் ஆகியோரின் பரிந்துரை அறிக்கையின் அடிப்படையில் மரக்காணம் வட்டம், நல்முக்கல் கிராமம், பட்டா புல எண்கள். 34/1B1 - 2.43.0 ஏர்ஸ், 35/2B - 0.28.0 ஏர்ஸ், 35/3 -0.88.0 ஏர்ஸ் மற்றும் 35/4 -1.16.0 ஏர்ஸ் ஆக மொத்த பரப்பு 4.75.00 ஹெக்டேர் பரப்பளவில் 1959-ம் வருட தமிழ்நாடு சிறுகனிம விதிகள், விதி எண்.19-ன்படி மேற்கண்ட நிபந்தனைகளுக்குட்பட்டு 10 (பத்து) வருட காலத்திற்கு திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் என்பவருக்கு சாதாரணக்கல் மற்றும் கிராவல் குவாரி உரிமம் வழங்குவதற்குரிய தகுதியான நிலப்பரப்பாக கருதப்படுகிறது.

அதன் அடிப்படையில், தமிழ்நாடு சிறு கனிம சலுகை விதிகள் 1959 விதி எண்.41-ன்படி குவாரிப்பணி மேற்கொள்வது தொடர்பாக வரைவு சுரங்க திட்டத்தினை தகுதிவாய்ந்த நபர் (QP) மூலமாக கீழ்கண்ட நிபந்தனைகளுக்குட்பட்டு தயாரித்து அதனை 90 தினங்களுக்குள் உதவி இயக்குநர் (புவியியல் மற்றும் சுரங்கத்துறை) அவர்களின் பரிசீலனைக்கு சமர்ப்பிக்குமாறு விண்ணப்பதாரரை கேட்டுக்கொள்ளப்படுகிறது. மேலும் ஏற்பளிக்கப்பட்ட சுரங்கத்திட்டத்தின் தொடர்ச்சியாக 1959ம் வருடத்திய தமிழ்நாடு சிறுகனிம சலுகை விதிகள், விதி எண்.42-ன்படி சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணையத்தின் தடையின்மை சான்று பெற்று சமர்பிக்கும் பட்சத்தில் மட்டுமே குவாரி உரிமம் வழங்கப்படும் என இதன் மூலம் தெரிவிக்கப்படுகிறது.

i. விண்ணப்ப புலன்களின் அருகில் உள்ள பட்டா நிலங்களுக்கு 7.5 மீட்டர் பாதுகாப்பு இடைவெளியும் மற்றும் அரசு புறம்போக்கு நிலங்களுக்கு 10 மீட்டர் பாதுகாப்பு இடைவெளியும் விட்டு குவாரிப்பணி மேற்கொள்ளப்பட வேண்டும்.

ii. குவாரிப்பணி மேற்கொள்ளும் போது அருகிலுள்ள அரசு புறம்போக்கு, வாய்க்கால் மற்றும் பட்டா நிலங்களுக்கு எவ்வித இடையூறும் இல்லாமல் குவாரிப்பணி செய்ய வேண்டும்.

iii. குவாரி குத்தகை வழங்கும் முன்பு விண்ணப்பித்துள்ள இடத்தினை DGPS சர்வே பணி மேற்கொண்டு அதன் அறிக்கையை சமர்பிக்க வேண்டும்.

உதவி இயக்குநர்,
புவியியல் மற்றும் சுரங்கத்துறை,
விழுப்புரம்.

பெறுநர்
திரு.வ.நாகராஜன்,
த/பெ.வரதராஜ் கவுண்டர்,
எண்.65, மரக்காணம் ரோடு,
பெருமுக்கல் கிராமம்,
மரக்காணம் வட்டம்,
விழுப்புரம் மாவட்டம்

நகல்:-
1. மாநில சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணையம், சென்னை.
2. ஆணையர், புவியியல் மற்றும் சுரங்கத்துறை, கிண்டி, சென்னை.

இணைப்பு-3

From
Tmt. S.Safiya, M.Sc.,
Assistant Director,
Geology and Mining,
Viluppuram.

To
Thiru.V.Nagarajan,
S/o.Varadaraj Gounder,
No.65, Marakkanam Road,
Perumukkal Village,
Marakkanam Taluk,
Viluppuram District.

Rc.No.B/G&M/96/2021 Dated 06 .03.2024

Sub: Mines & Minerals – Minor Mineral – Rough stone and Gravel - Viluppuram District – Marakkanam Taluk – Nalmukkal Village - over an extent of 4.75.00 hectares of patta lands – S.F.Nos. 34/1B1 - 2.43.0, 35/2B - 0.28.0, 35/3 - 0.88.0 and 35/4 - 1.16.0 – Quarry lease application preferred by Thiru.V.Nagarajan, Perumukkal Village – Precise area communicated - Submission of mining plan for approval – Approved – Regarding.

Ref:
1. Quarry lease application dated 15.04.2021 preferred by Thiru.V.Nagarajan, S/o.Varadaraj Gounder, No.65, Marakkanam Road, Perumukkal Village, Marakkanam Taluk, Viluppuram District.
2. Assistant Director, Geology and Mining, Viluppuram Letter Rc.No. B/G&M/96/2021 Dated 02.02.2024.
3. Mining Plan submitted by Thiru.V.Nagarajan, S/o.Varadaraj Gounder Dated 04.03.2024.
4. G.O.Ms.No.79, Industries (MMC-1) Department dated 06.04.2015.
5. G.O.(Ms).No.169, Ind. (MMC.1) Dept. dated 04.08.2020.

****

In response to the precise area communicated vide the reference 2nd cited, the applicant viz., Thiru.V.Nagarajan, S/o.Varadaraj Gounder vide reference 3rd cited has submitted three copies of mining plan for the area applied seeking grant of quarry lease for Rough stone and Gravel over an extent of 4.75.00 hectares of patta lands in S.F.Nos.34/1B1 - 2.43.0, 35/2B - 0.28.0, 35/3 - 0.88.0 and 35/4 -1.16.0 of Nalmukkal Village, Marakkanam Taluk, Villupuram District with a request to approve the same.

2. The mining plan so submitted has been verified in detail.

3. As per the guidelines / instructions issued by the Commissioner of Geology and Mining, Chennai vide letter Rc.No.3868/LC/2012, dated 19.11.2012, the mining plan is hereby approved subject to the following conditions:

(i) The mining plan is approved without prejudice to any other Law applicable to the quarry lease from time to time whether such laws are made by the Central Government, State Government or any other authority.

(ii) This approval of the mining plan does not in any way imply the approval of the Government in terms or any other provisions of the Mines and Minerals (Development and Regulation) Amended Act, 2015, or any other connected laws including Forest (Conservation) Act, 1980, Forest Conservation Rules, 1981, Environment Protection Act, 1980, Explosives Act, 1884 (Central Act IV of 1884) and the Rules made there under and the Tamil Nadu Minor Mineral Concession Rules, 1959.

(iii) The mining plan is approved without prejudice to any other order or direction from any court of competent jurisdiction.

(iv) As per the Assistant Director, Geology and Mining, Viluppuram letter Rc.No.B/G&M/96/2021 Dated 02.02.2024, the following conditions have been incorporated in the Mining Plan.

a. A safety distance of 7.5 meter and 10 meter should be provided to the adjacent patta lands and Government lands.

(v) Quarrying shall be strictly done as per the approved Mining Plan.

Encl: Two copies of Approved Mining Plan.

06/03/2024

Assistant Director,
Dept. of Geology and Mining,
Viluppuram.

6/3/24

Copy to:

The Commissioner of Geology and Mining, Chennai-32.

APPROVAL MINING PLAN

6 MAR 2024

MINING PLAN FOR

NALMUKKAL

ROUGH STONE & GRAVEL QUARRY

(Prepared under rule 19(1), 41 & 42 of Tamil Nadu
Minor Mineral Concession Rules, 1959)

LOCATION OF THE QUARRY LEASE APPLIED AREA

STATE	:	TAMIL NADU
DISTRICT	:	VILUPPURAM
TALUK	:	MARAKKANAM
VILLAGE	:	NALMUKKAL
S.F.NOS	:	34/1B1, 35/2B, 35/3 and 35/4
EXTENT	:	4.75.00Ha

ECO-FRIENDLY

SUSTAINABILITY

SAFETY

FOR
APPLICANT

THIRU. V.Nagarajan,
S/o. Varadharaj Gounder,
No.65, Marakkanam Road,
Perumukkal Village, Marakkanam Taluk,
Viluppuram District.

PREPARED BY

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person
No.93/36E2, Subramaniyar Kovil Street,
Omalur Taluk, Salem District, Tamil Nadu,
Pin code-636 455.
Mobile: 97502 23535 & 94446 54520.

(PPE)

V.Nagarajan,
S/o. Varadharaj Gounder,
No.65, Marakkanam Road,
Perumukkal Village, Marakkanam Taluk,
Viluppuram District.

CONSENT LETTER FROM THE APPLICANT

The Mining Plan in respect of **Rough Stone and Gravel** quarry over an extent of 4.75.00hectares of Patta lands in S.F.Nos.34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu State has been prepared by

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person

I request the Assistant Director, Department of Geology and Mining, Viluppuram District to make further correspondence regarding modifications of the Mining Plan with the said Qualified Person on this following address.

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person
No.93/36E2, Subramaniyar Kovil Street,
Omalur Taluk, Salem District,
Tamil Nadu, Pin code-636 455.
Mobile:97502 23535 & 94446 54520.

I hereby undertake that all modifications so made in the Mining Plan by the Qualified Person may be deemed to have been made with my knowledge and consent and shall be acceptable to me and building on me in all respects.

Signature of the Applicant

V.Nagarajan

Place: Viluppuram
Date: 03.02.2024

V.Nagarajan,
S/o. Varadharaj Gounder,
No.65, Marakkanam Road,
Perumukkal Village, Marakkanam Taluk,
Viluppuram District.

DECLARATION

The Mining Plan in respect of **Rough Stone and Gravel** quarry over an extent of 4.75.00hectares of Patta lands in S.F.Nos.34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu State has been prepared with my consultation and I have understood the contents and agree to implement the same in accordance with the Mining Laws.

Signature of the Applicant

V.Nagarajan

Place: Viluppuram
Date: 03.02.2024

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person
No.93/36E2, Subramaniyar Kovil Street,
Omalur Taluk, Salem District,
Tamil Nadu, Pin code-636 455.
Mobile:97502 23535 & 94446 54520.

06 MAR 2024

CERTIFICATE

This is to certify that, the provisions of under rules 41 & 42 as Amended in under Tamil Nadu Minor Mineral Concession Rules, 1959, have been observed in the Mining Plan for the grant of **Rough Stone and Gravel** quarry lease over an extent of 4.75.00hectares of Patta lands in S.F.Nos.34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District Tamil Nadu State applied by Thiru.V.Nagarajan, for fresh quarry lease.

Wherever specific permission / exemptions / relaxations or approvals are required, the applicant will approach the concerned authorities of State and Central Governments for granting such permissions etc.

Certified
Signature of Qualified Person.

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person
C.NATARAJAN M.Sc.,M.Phil.,
Qualified Person

Place: Salem
Date: 05.02.2024

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person
No.93/36E2, Subramaniyar Kovil Street,
Omalur Taluk, Salem District,
Tamil Nadu, Pin code-636 455.
Mobile:97502 23535 & 94446 54520.

- 6 MAR 2024

CERTIFICATE

Certified that, in preparation of Mining Plan for **Rough Stone and Gravel** quarry over an extent of 4.75.00hectares of Patta lands in S.F.Nos.34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District Tamil Nadu State for Thiru.V.Nagarajan, covers all the provisions of Mines Act, Rules, and Regulations etc., made there under and whenever specific permission are required, the applicant will approach the Director General of Mines Safety, Chennai. The standards prescribed by DGMS in respect of Mines Health will be strictly implemented.

Certified
Signature of Qualified Person.

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person
C.NATARAJAN M.Sc.,M.Phil.,
Qualified Person

Place: Salem
Date: 05.02.2024

CERTIFICATE

Certified that I, C.Natarajan, residing at No.93/36 E2, Subramaniyar Kovil Street, Omalur Taluk, Salem District, Tamil Nadu, Pin Code-636 455. I am a Post graduate in Geology (M.Sc., Geology) from Annamalai university and more than five years of experience in mining Field.

Rule 15(1)(a) and (b) of Minerals (Other than Atomic, Hydro Carbons Energy Minerals) concession Rules 2016 stipulates the eligibility for preparing Mining Plans as *"(1)(a) a post graduate degree in Geology granted by a university established" and (1)(b) "Professional experience of five years of working in a supervisory capacity in the field of mining after obtaining the degree"*. Since my qualification and experience are satisfied the Rule (1)(a) and (1)(b) of 15 of the Said Rules, I am eligible to prepare Mining Plans for both Major and Minor Minerals.

Accordingly I prepared this Mining Plan in respect of Rough Stone and Gravel quarry lease applied for an extent of 4.75.00hectares of Patta land in S.F.Nos.34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District by Thiru.V.Nagarajan, for a period of Ten years. Since the Mining Plan is prepared as per the provisions contained in Rule 15(1) (a) and (b) of Minerals (Other than Atomic, Hydro Carbons Energy Minerals) concession Rules 2016, the same may be approved by the Competent Authority.

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person

C.NATARAJAN M.Sc.,M.Phil.,
Qualified Person

Place: Salem
Date: 05.02.2024

CONTENTS

S. No.	Description	Page No.
1.0	Introduction	1
2.0	General Information	5
3.0	Location	6
4.0	Geology and Mineral Reserves	8
5.0	Mining	11
6.0	Blasting	14
7.0	Mine Drainage	15
8.0	Other Permanent Structures	16
9.0	Employment Potentials &Welfare Measures	17
10.0	Environment Management Plan	19
11.0	Mine Closure Plan	22
12.0	Any Other Details Intend to furnish by the Applicant	23

Annexure

S. No.	Description	Annexure No.
1.0	Precise Area Communication letter issued by the Assistant Director, Department of Geology and Mining,	I
2.0	Copy of FMB	II
3.0	Copy of village map	III
4.0	Copy of Patta	IV
5.0	Copy of Adangal	V
6.0	Copy of A Register	VI
7.0	Copy of Identity Proof	VII
8.0	Copy of QP Certificate	VIII

LIST OF PLATES

S. No.	Description	Plate No.
1.0	Location Plan	I
2.0	Environmental Plan	I-A
3.0	Satellite imagery map	I-B
4.0	Topo sketch of Quarry lease applied area for 10Km Radius	I-C
5.0	Key Plan	I-D
6.0	Quarry lease & Surface plan	II
7.0	Topography, Geological, Mineable plan and sections	III
8.0	Year wise Development and Production Plan & Sections	IV
9.0	Progressive Quarry Closer Plan & Sections	V
10.0	Conceptual Plan & Sections	VI

6 MAR 2024

MINING PLAN FOR MINOR MINERALS

ROUGH STONE AND GRAVEL

Over an extent of 4.75.00hectares of Patta land in S.F.Nos.34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu State.

(PREPARED UNDER RULE 19(1), 41 and 42 OF TNMMCR 1959)

1.0 Introduction and Executive Summary;

1. The present Mining Plan is prepared for Thiru.V.Nagarajan, S/o. Varadharaj Gounder, residing at No.65, Marakkanam Road, Perumukkal Village, Marakkanam Taluk, Viluppuram District.
2. The application was processed by the Assistant Director, Department of Geology and Mining, Viluppuram, and passed an order vide Rc.No.A/G&M/96/2021 dated 02.02.2024 directing the applicant to produce approved Mining Plan under Rule 41(5) of the Tamil Nadu Minor Mineral Concession Rules, 1959 and Environmental Clearance Certificate under Rule 42 from the State Level Environmental Impact Assessment Authority (SEIAA) for the grant of quarry lease to quarry **Rough Stone and Gravel** over an extent of 4.75.00 hectares of Patta lands in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District of Tamil Nadu State for a period of ten years.
3. Accordingly, Mining Plan is prepared under the provisions of rule 19(1), 41 and 42 as per the amendments under Tamil Nadu Minor Mineral Concession Rules, 1959 by incorporating following the conditions imposed in the precise area communication letter.
   a) A safety distance of 7.5m shall be maintained to the adjacent patta lands and safety distance of 10m shall be maintained to government poramboke land while quarrying operation.

- 6 MAR 2024

b) The applicant shall be maintained proper safety distance to the government poramboke vaikkal and the applicant should not cause any hindrance to adjoining patta lands while rough stone quarrying operations.

c) The applicant should be submit DGPS survey report before the grant of quarry lease.

4. Geological Resources is estimated at 21,37,500m^3 of Rough stone and 1,42,500m^3 of gravel formation and Mineable Reserves is estimated at 10,15,275m^3 of Rough Stone and 96,210m^3 of gravel formation and after leaving necessary safety distance from the lease boundary as indicated in the precise area letter and relevant mining laws in force.

5. The production schedule is proposed production of 8,89,700m^3 of Rough Stone, 96,210m^3 of gravel formation for the period of first five years.

6. The applicant ensured that, child labours under 18 years of age will not be engaged for quarrying operation.

7. The applicant ensure that will appoint should have valid certified persons (Mines Manager, Foreman, Mate) during quarrying operation.

8. Environmental parameters,

i) The area does not attract the Forest Conservation Act, 1980 as there is no forest around 2.8km radius.

ii) There is no interstate boundary around 10Kms radius.

iii) There is no wild life animal sanctuary within 10Kms radius from the project site area under the Wildlife (Protection) Act, 1972.

Therefore the project seeks clearance only from State Level Environmental Impact Assessment Authority (SEIAA).

9. Environmental measures to be adopted shall be,

i) Dust Control at source while drilling and blasting,

ii) Dust suppression at loading point and transport haul roads,

iii) Noise Control in blasting, control of fly rock missiles and vibration by doing peak particle velocity with in standard as prescribed by the DGMS and MOEF.

iv) Unnecessary land degradation should be avoided or damaged land should be reclaimed or rehabilitated.

v) Avoid uneven rat hole mining and follow scientific and systematic mining by safe bench system of open cast mining.

vi) Mining near major fracture zones if any should be avoided to control ground water fluctuation in the adjacent agricultural lands.

vii) Emission test of vehicles should be in tack to maintain minimum emission level of flue gases.

viii) Noise level should not exceed 80db and the vehicles should use only permitted Air Horn while on road near residential areas.

ix) Safety zones as prescribed by the Department of Geology and Mining from adjacent infrastructures should be strictly adhere to.

x) And any other conditions as stipulated by the concerned authorities should be followed to protect the environment.

EXECUTIVE SUMMARY:

a.	Name of the Village Panchayat	:	Nalmukkal
b.	Name of the Panchayat Union	:	Nalmukkal
c.	The proposed total Minable Reserves	:	10,15,275m³ of Rough Stone, 96,210m³ of gravel formation
d.	The proposed quantity of reserves (level of production) for Five years to be mined is(Recoverable reserves)	:	8,89,700m³ of Rough Stone, 96,210m³ of gravel formation
e.	Total extent of the area	:	4.75.00Ha
f.	Proposed Period of mining	:	Five Years
g.	Existing depth	:	3m (maximum) below ground level
h.	Proposed Depth of mining	:	38m below ground level for the proposed mining plan.
i.	Method of mining/level of mechanization	:	Opencast, Semi-mechanized Mining with a bench height of 5m and bench width of 5m is proposed.
j.	Types of Machineries used in the quarry	:	Machineries like Tractor mounted compressor attached with Jack hammers, Excavators are proposed to deploy for quarrying operation.
k.	Cost of the Project A. Fixed Assets Cost B. Operational Cost C. EMP Cost		Rs. 31,50,000/- Rs. 92,50,000/- Rs. 6,70,000/- Total Project cost(A+B+C)=**Rs.1,30,70,000/-**

l. The area applied for lease is bounded by fourteen corners and the coordinates are clearly marked in plate no II.

Corners	Co- ordinates		Distance between the corners		
	Latitude	Longitude			
1	12° 13' 06.70"N	79° 46' 08.42"E	1-2	=	136.8m
2	12° 13' 10.99"N	79° 46' 09.64"E	2-3	=	77.6m
3	12° 13' 11.68"N	79° 46' 07.17"E	3-4	=	22.0m
4	12° 13' 12.34"N	79° 46' 07.46"E	4-5	=	20.8m
5	12° 13' 13.00"N	79° 46' 07.60"E	5-6	=	59.0m
6	12° 13' 12.66"N	79° 46' 09.52"E	6-7	=	49.2m
7	12° 13' 14.23"N	79° 46' 09.82"E	7-8	=	21.2m
8	12° 13' 14.04"N	79° 46' 10.49"E	8-9	=	15.2m
9	12° 13' 14.52"N	79° 46' 10.61"E	9-10	=	180.2m
10	12° 13' 12.41"N	79° 46' 16.18"E	10-11	=	15.2m
11	12° 13' 11.96"N	79° 46' 15.97"E	11-12	=	20.0m
12	12° 13' 11.31"N	79° 46' 15.92"E	12-13	=	61.6m
13	12° 13' 09.35"N	79° 46' 15.46"E	13-14	=	132.0m
14	12° 13' 05.24"N	79° 46' 14.18"E	14-1	=	179.8m

2.0 General Information:

2.1	a.	Name of the Applicant	:	Thiru.V.Nagarajan,
	b.	Address of the Applicant with phone No and e-mail id if any	:	S/o. Varadharaj Gounder, No.65, Marakkanam Road, Perumukkal Village, Marakkanam Taluk, Viluppuram District. Pin Code– 604301 Cell No.:9626809118
	c.	Status of the Applicant	:	Individual
2.2	a.	Mineral Which the applicant intends to mine	:	Rough Stone and Gravel.
	b.	Precise area communication letter No.	:	Precise area communication letter received from the Assistant Director, Department of Geology and Mining, Viluppuram, vide Rc.No.A/G&M/96/2021 dated 02.02.2024.
	c.	Period of permission / lease granted	:	The Assistant Director, Department of Geology and Mining, Viluppuram, has grant of lease period for **ten years.**
	d.	Name and Address of the QP preparing Mining Plan	:	**C.Natarajan, M.Sc.,M.Phil.,** **Qualified Person** No.93/36E2, Subramaniyar Kovil Street, Omalur Taluk, Salem District, Tamil Nadu, Pin-636 455. Mobile: 97502 23535 & 94446 54520.

6 MAR 2024

3.0 Location:

S.No		Details of the Area:
1	Corner Coordinates	Latitude :12°13'05.24"N to 12°13'14.52"N Longitude :79°46'07.17"E to 79°46'16.18"E
2	Toposheet Number	57- P/16
3	The altitude of the area	90m (MSL)
4	Extent	4.75.00Ha
5	Survey Nos	34/1B1, 35/2B, 35/3 and 35/4
6	Village	Nalmukkal
7	Taluk	Marakkanam
8	District	Viluppuram
9	State	Tamil Nadu

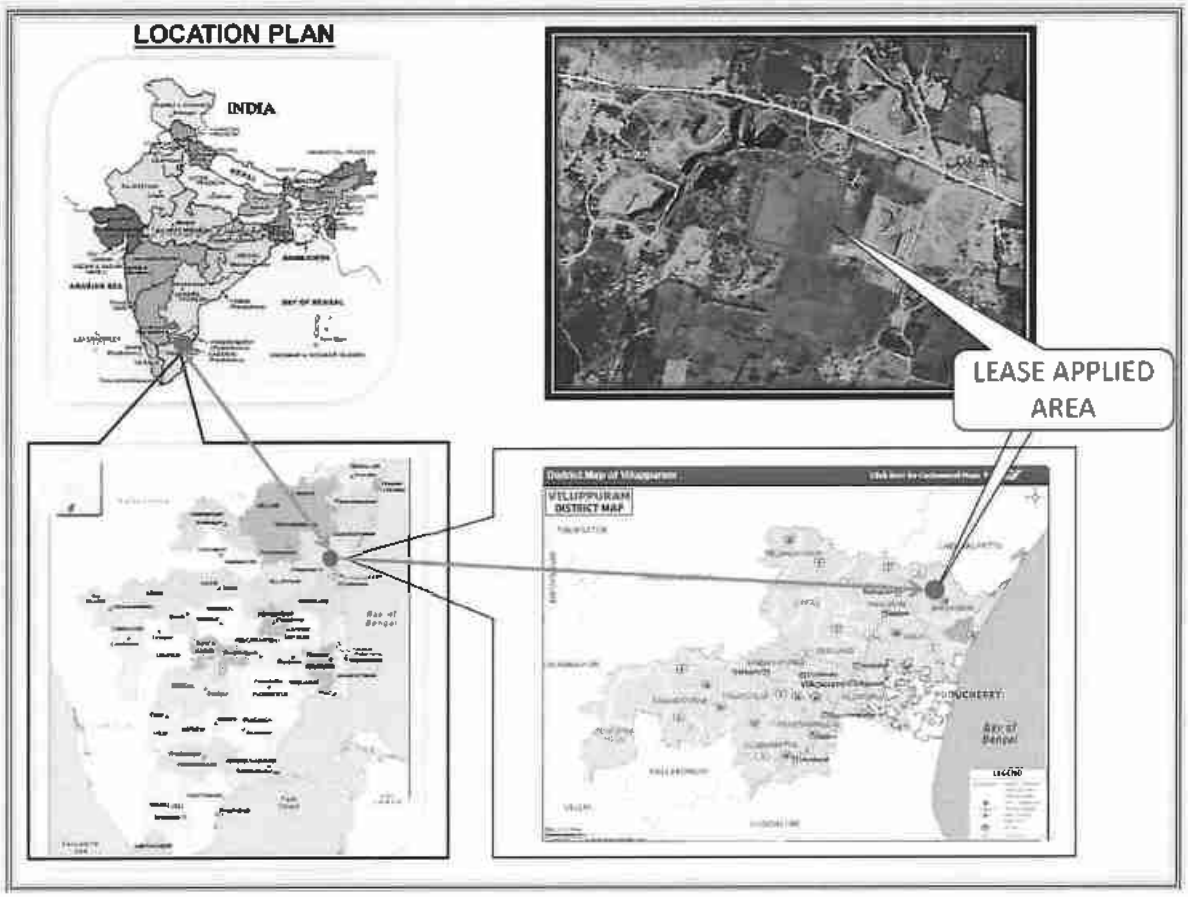

6 MAR 2024

a.	Classification of the Area (Ryotwari / poramboke / others)	:	Patta land
b.	Ownership / Occupancy of the Applied area (Surface rights)	:	It is patta land registered in the name of applicant vide patta no.425, Please refer Annexure No: IV.
c.	Toposheet No. with Latitude and Longitude	: : :	Topo Sheet No: 57-P/ 16 Latitude:12°13'05.24"N to 12°13'14.52"N Longitude:79°46'07.17"E to 79°46'16.18"E
d.	Existence of Public Road / Railway line if any nearby the area and approximate distance	:	There is an existing road from the area leads to Ariyanthangal - Senalur village road on northern side of the area. The Nearest Railway line is Viluppuram to Chennai line which is about 10Km on northwestern side of the area.

SATELLITE IMAGERY OF THE LEASE APPLIED AREA

TOPOGRAPHICAL VIEW OF LEASE APPLIED AREA

Fig. Location of the lease applied area

- 6 MAR 2024

PART - A

4.0 Geology and Mineral Reserves:

4.1	a.	Topography	:	➢ The area applied for quarry lease is exhibits almost plain topography covered by Gravel formation. The massive Charnockite formation is noticed below 3m (Avg) Gravel formation and sloping towards southeastern side of the area, the altitude of the area is above 90m (maximum) from MSL. ➢ No major river is found nearby the lease applied area. ➢ Water table is found at a depth of 68m in summer and 65m in rainy seasons. ➢ Temperature of the area is reported to be 18°C to a maximum of 42°C during summer. ➢ Rainfall of this area is about 800mm to 900 mm during the both NE & SW monsoons.
	b.	General Geology of the Area	:	The area is underlain by the wide range of metamorphic rocks of peninsular gneissic complex. These rocks are extensively weathered and overlain by the recent valley fills and alluvium at places. The geological formations found in the district are Archaean rocks like Gneisses, Granites, Charnockites basic granulites and calc-gneisses. The younger formations are Quartz veins and pegmatite. The rock type noticed in the area for lease is Charnockite which contains mostly Quartz and Feldspar with some ferromagnesian minerals. The Charnockite is part of peninsular Gneisses, a high grade metamorphic rock. The strike of the Charnockite formation is N45°E –S45°W with dipping towards SE80°. The general geological succession of the area is given as under. **AGE** — **ROCK TYPE** Recent - Gravelly soil Unconformity Archaean - Dolerite dyke Charnockite. Peninsular Gneissic complex and Calc Gneiss

- 6 MAR 2024

4.2		Details of Exploration already carried out if any	:	No exploration was carried out, as the Rough stone formations are clearly visible as out crops within the lease applied area.
4.3	a.	Estimation of Reserves	:	The Geological and Recoverable reserves are estimated by cross sectional method. Totally three sections have been drawn, one section drawn length wise as (X-Y), and another two sections drawn width wise as (A-B), (C-D) to cover maximum area considered for lease. The Plans and Sections have been drawn with a scale of 1:1000 and 1:500 respectively. Please refer plate No.III.

a. Geological Resources

The quarrying is restricted up to a depth of 48m below ground level only, availability of resources is given below.

The Geological resources are calculated in area method.

4.75.00Ha X 10,000Sqm = 47,500m^2

47,500m^2 X 3.0m Depth = 1,42,500m^3 of Gravel Formation

47,500m^2 X 45.0m Depth = 21,37,500m^3 of Rough stone

Gravel Formation : 1,42,500m^3

The Geological Resources of Rough stone : 21,37,500m^3

b. Already excavated

The area has been quarried in earlier operation the existing pit dimension are given below.

Table No-1

Pit No	length (Max) in(m)	Width (Max) in (m)	Depth (Max) in (m)
I	31	21	3m below ground level

c. Available Mineable Reserve

The available mineable reserve calculated by deducting 7.5m safety distance and bench loss.

Table No-2

Section	Bench	Length in (m)	Width in (m)	Depth in (m)	Volume in m^3	Gravel in m^3	Mineable Reserves of Rough stone in m^3
XY-AB	I	73	154	3	33726	33726	
	II	95	174	5	82650		82650
	III	90	164	5	73800		73800
	IV	85	154	5	65450		65450
	V	80	144	5	57600		57600
	VI	75	134	5	50250		50250
	VII	70	124	5	43400		43400
	VIII	65	114	5	37050		37050
	IX	60	104	5	31200		31200
	X	55	94	5	25850		25850
	Total					**33726**	**467250**
XY-CD	I	127	164	3	62484	62484	
	II	123	155	5	95325		95325
	III	118	145	5	85550		85550
	IV	113	135	5	76275		76275
	V	108	125	5	67500		67500
	VI	103	115	5	59225		59225
	VII	98	105	5	51450		51450
	VIII	93	95	5	44175		44175
	IX	88	85	5	37400		37400
	X	83	75	5	31125		31125
	Total					**62484**	**548025**
Grand Total						**96210**	**1015275**

The available mineable reserve is computed as 10,15,275m^3 of Rough stone and 96,210m^3 of Gravel formation upto a depth 48m below ground level only.

5.0	**Mining:**		
5.1	Method of Mining	:	1. Opencast method of semi mechanized mining with 5.0m height 5m width of the bench. 2. However, as far as the quarrying of Rough stone is concerned, observance of the provisions of Regulation 106(2) (b) as above is seldom[possible due to various inherent petrogenetic factors coupled with mining difficulties. Hence it is proposed to obtain relaxation to the provisions of the above regulation from the Director of mines safety for which necessary provision is available with the regulation 106 (2) (b) of MMR-1961, under Mine Act-1952.
5.2	Mode of Working	:	The rough stone is proposed to quarry 5m bench height, 5m width with conventional opencast semi-Mechanized method. The quarry operation involves shallow jack hammer drilling, slurry blasting, excavation, Loading and transportation of Rough stone to the needy crushers/other buyers. The production of Rough stone in this quarry involves the following method which is typical for Rough Stone quarrying in contrast to other major mineral mining. Splitting of rock mass of considerable volume from the parent rock mass by jackhammer drilling and blasting, hydraulic excavators are used for loading the Rough Stone from pithead to the needy crushers/other buyers. Occasionally hydraulic excavators are attached with rock breakers for fragmentation to avoid secondary blasting. The primary boulders thus splitted are removed from the pits by excavators and further made to smaller sizes by rock breakers attached in excavators. It is a conventional opencast semi mechanized method of mining.
5.3	Proposed bench height & Width	:	Quarrying of Rough Stone is proposed bench height of 5m and bench width of 5m.
5.4	Details of Overburden / Mineral Production proposed for the first 5 years.	:	The overburden in the form of Gravel, after the excavation of Gravel and Rough stone will be directly loaded into tipper to the needy crushers/other buyers for road project and construction works for filling and leveling of low lying areas.

The Yearwise Production and Development Table

Table No –3

Year	Section	Bench	Length in (m)	Width in (m)	Depth in (m)	Volume in m^3	Gravel in m^3	Mineable reserve of Rough stone in m^3
I	XY-AB	I	68	154	3	31416	31416	
		II	90	174	5	78300		78300
		III	85	164	5	69700		69700
		IV	38	154	5	29260		29260
	Total						**31416**	**177260**
II	XY-AB	I	5	154	3	2310	2310	
		II	5	174	5	4350		4350
		III	5	164	5	4100		4100
		IV	47	154	5	36190		36190
	XY-CD	I	61	164	3	30012	30012	
		II	61	155	5	47275		47275
		III	61	145	5	44225		44225
		IV	61	135	5	41175		41175
	Total						**32322**	**177315**
III	XY-CD	I	66	164	3	32472	32472	
		II	62	155	5	48050		48050
		III	57	145	5	41325		41325
		IV	52	135	5	35100		35100
		V	86	125	5	53750		53750
	Total						**32472**	**178225**
IV	XY-CD	V	22	125	5	13750		13750
		VI	98	115	5	56350		56350
	XY-AB	V	80	144	5	57600		57600
		VI	75	134	5	50250		50250
	Total							**177950**
V	XY-CD	VI	5	115	5	2875		2875
		VII	98	105	5	51450		51450
		VIII	93	95	5	44175		44175
	XY-AB	VII	70	124	5	43400		43400
		VIII	65	114	5	37050		37050
	Total							**178950**
Grand Total							**96210**	**889700**

The available mineable reserve is computed as 10,15,275m^3 of Rough stone and 96,210m^3 of Gravel formation but the applicant has proposed to carry out 8,89,700m^3 of Rough stone and 96,210m^3 of Gravel formation upto a depth of 38m below ground level for the period of first five years

<table>
<tr><td>5.5</td><td></td><td>Machineries to be used</td><td></td><td></td></tr>
<tr><td></td><td>a.</td><td>Drilling</td><td>:</td><td>It is proposed to use following machineries for quarrying rough stone
<table>
<tr><th>S.No</th><th>Type</th><th>Nos</th><th>Dia Hole mm</th><th>Make</th><th>Motive power</th></tr>
<tr><td>1</td><td>Jack hammer</td><td>16</td><td>32</td><td>Atlas Copco</td><td>Compressed air</td></tr>
<tr><td>2</td><td>Compressor</td><td>4</td><td>-</td><td>Atlas Capco</td><td>Diesel Drive</td></tr>
</table></td></tr>
<tr><td></td><td>b.</td><td>Loading</td><td>:</td><td>Excavator of 0.90m³ bucket capacity (with Rock breaker attachment) (2No).</td></tr>
<tr><td></td><td>c.</td><td>Transportation</td><td>:</td><td>Tipper 6Nos (5/10Ts) capacity.</td></tr>
<tr><td>5.6</td><td></td><td>Disposal of Overburden</td><td>:</td><td>The overburden in the form of Gravel, after the excavation gravel will be directly loaded into tipper to the needy buyers for road project and construction works for filling and leveling of low lying areas.</td></tr>
<tr><td>5.7</td><td></td><td>Brief Note on Conceptual Mining Plan for the entire lease period</td><td>:</td><td>Conceptual Mining Plan is prepared with an object of ten years of systematic development of bench lay outs, selection of ultimate pit limit, depth of quarrying, ultimate pit slope, selection of sites for construction of infrastructures etc.
Ultimate pit size is designed based on certain practical factors such as the economical depth of mining, safety zones, permissible areas etc.
Ultimate Pit dimension is given as under,
<table>
<tr><th colspan="4">Ultimate Pit dimension (M) end of Mining plan Period</th></tr>
<tr><th>Pit No</th><th>Length (max) in (m)</th><th>Width (Avg) in (m)</th><th>Depth(max) in(m)</th></tr>
<tr><td>I</td><td>227</td><td>170</td><td>38</td></tr>
<tr><th colspan="4">Ultimate pit dimension End of the lease period</th></tr>
<tr><th>Pit No</th><th>Length (max) in (m)</th><th>Width (Avg) in (m)</th><th>Depth(max) in(m)</th></tr>
<tr><td>I</td><td>227</td><td>170</td><td>48</td></tr>
</table>
Afforestation has been proposed on all along the boundary barrier by planting trees.
All the baseline information studies like Air Quality monitoring, Noise and Vibration monitoring, Water Analysis studies will be carried out every year as per the MOEF norms.</td></tr>
</table>

- 6 MAR 2024

6.0 Blasting:

6.1	Blasting Pattern	:	The massive formation shall be broken into pieces of portable size by drilling and blasting using jack hammers and shot hole blasting. Powder factor of explosives for breaking such hard rock shall be in the order of 6 to 7 Tonnes per K.g of explosives. Blasting parameters are as follows.

Diameter of the hole	Spacing	Depth	Burden for hole	Pattern of hole	Inclination of hole
32-36mm	0.6m	1 to 1.5m	0.6m	Zig Zag	70^0 from the horizontal

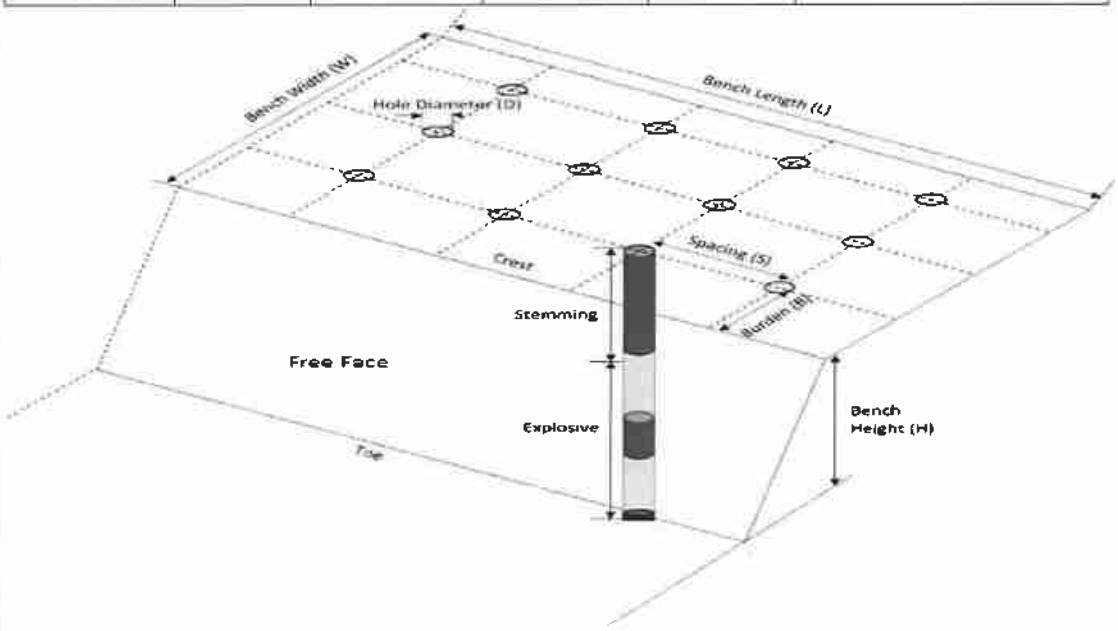

6.2	Types of Explosives	:	Small dia, 25mm slurry explosive are proposed to be used for shattering and heaving effect for removal and winning of Rough stone. No deep hole drilling or primary blasting is proposed.

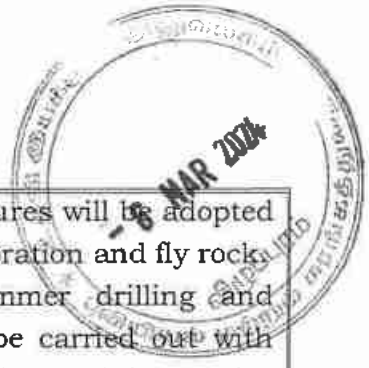

6.3	Measures proposed to minimize ground vibration due to blasting	:	➢ Controlled blasting measures will be adopted for minimizing ground vibration and fly rock. ➢ Shallow depths jackhammer drilling and blasting is proposed to be carried out with minimum use of explosive mainly to give shattering effect in rough stone for easy excavation and to control fly rock.

Number of holes	:	514
Powder factor	:	6Ts/Kg of explosives
Total explosive required	:	257Kg slurry explosives
Charge / hole	:	0.5Kg
Blasting time	:	12-2 Pm

6.4	Storage of Explosives and safety measures to be taken while blasting.	:	➢ The applicant will engage an authorized explosive agency to carry out the small amount of blasting and it will be supervised by competent and statutory foreman/ mines manager. ➢ ***The applicant ensure that will appoint the Mate (Should have Valid Blaster Certificate) during Blasting Operation.***

7.0 <u>Mine Drainage</u>:

7.1	Depth of Water table	:	The ground water table is reported as 68m below ground level. In the proposed mining plan only 38m (below ground level) and 48m depth has been envisaged as workable depth for safe & economic quarrying for the entire lease period. Hence the quarrying operation may not affect the ground water.
7.2	Arrangement and Places where the mine water is finally proposed to be discharged	:	The ground water may not rise immediately in this type of mining. However, the rain water percolation and collection of water from the seepage shall be less than 300lpm and it shall be pumped about periodically by a stand by diesel powered Centrifugal pump motivated with 7.5H.P.Motor. The quality of water is potable and it is not contaminated with any hazardous things. Hence, water stored in the quarry pit will be pumped into the adjacent agricultural fields. Further the water stored in the old pit will also be used for plantation purposes

8.0	**Other Permanent Structures:**		
8.1	Habitations / Village	:	There are no habitations within a radius of 300m.
8.2	Power lines (HT/LT)	:	There is no Power line (HT/LT) passing within a radius of 50m.
8.3	Water bodies (River, Pond, Lake, Odai, Channel etc)	:	There is a seasonal odai passing on northeastern side of the area and is 230m away from the lease applied area, there is tank situated on southern side of the area and is 270m away from the area.
8.4	Archeological / Historical Monuments	:	There are no Archaeological / Historical Monuments within a radius of 300m.
8.5	Road (NH, SH, Village Road etc)	:	The National Highway (NH-179B) Chennai – Tiruvannamalai is about 9.3km on northwestern side of the area. The State Highway (SH-134) Tindivanam – Marakkanam is about 2Km on southern side of the area.
8.6	Places of Worship	:	There are no Places of Worship within a radius of 50m.
8.7	Reserved Forest / Forest / Social Forest / Wild Life Sanctuary etc.,	:	There is no Reserved Forest / Wild Life Sanctuary etc., within a radius of 1Km.
8.8	Any Interstate Border, Protected areas under the Wild Life (Protection) Act, 1972, Critically Polluted Areas as Identified by Central Pollution Control Board and Notified Eco sensitive areas	:	There are No inter State border within a radius of 10Kms.
8.9	Any Other Structures	:	Nil

9.0 Employment Potential & Welfare Measures:

9.1 Employment Potential (Management & Supervisory personal)

The proposed organization chart

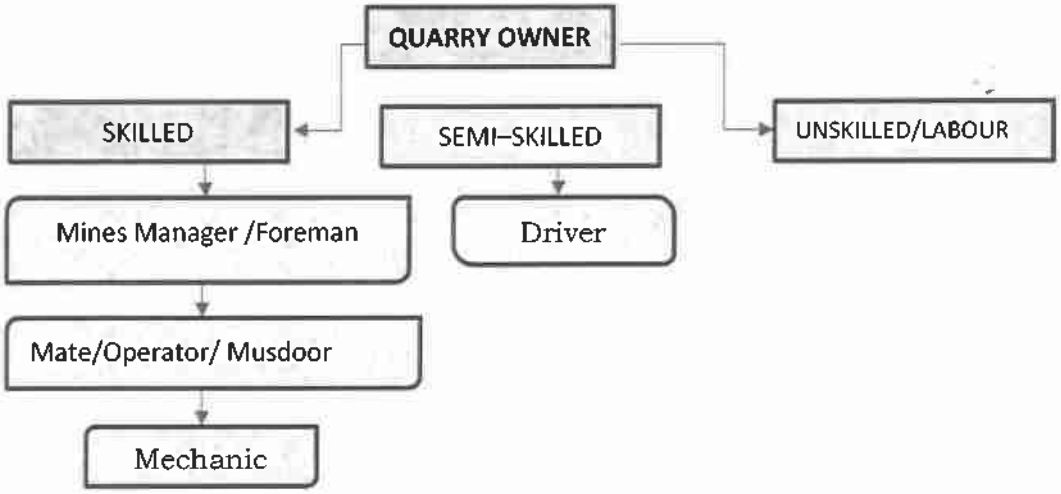

1.	Skilled	Mines Manager	1 No.
		Foreman / Mate	3 No.
		Operator	18 No.
		Mechanic	1 No.
2.	Semi–skilled	Driver	6 No.
3.	Unskilled	Labours	14Nos
		Total =	43Nos

Allowing 10% absentee, the no. of men of roll will be around 39.

The above man power is adequate to meet out the production schedule and the machinery strength envisaged in the mining plan and to comply the statutory provisions of Mines Safety Regulations.

- **It is been ensured that, child labours under 18 years of age will not be engaged for quarrying operation.**
- **Necessary life insurance policies will be taken by the applicant to all the employees up to the end of the lease period.**

9.2		Welfare Measures		
	a.	Drinking Water	:	Packaged drinking water is available from the nearby approved water vendors in Bramadesam village which is about 2Km on southeastern side of the area.

	b.	Sanitary facilities	:	Semi-permanent latrines & urinals shall be maintained at convenient places for use of labour as per the provisions of Rule (33) of the Mines Rules, 1960 separately for males and females. Washing facilities shall also be arranged as per rule (36) of the Mines Rules, 1960.
	c.	First Aid Facility	:	First aid kits are kept in Mines office room, in case of such eventualities the victim will be given first aid immediately at the site and injured person will be taken to the hospital. Hospital is available at distance of 12.5Km (West) in Thindivanam the competent and Statutory foreman/ permit manager will be in charge of first aid.
	d.	Labour Health	:	As per Mines Rule, Periodic medical examination related to occupational health safety will be conducted to all the workers in applicant's own cost.
	e.	Precautionary safety measures to the Labourers:		
		Safety provisions like helmet, goggles, safety shoes, Dust mask, Ear muffs etc., have to be provided as per the circulars and amendments made for Mine labours under the guidance of DGMS being a mechanized operation. Necessary training will be conducted once in a year to all the employees with the help of qualified and experienced officers to train about the safe and systematic quarrying operation.		

PART – B

10.0 Environmental Management Plan:

10.1	Existing Land Use Pattern	:	1. The area is exhibits almost plain topography covered by Gravel formation. 2. Quarrying operation is proposed up to a depth of 38m below ground level for the proposed mining plan period. 3. Fluctuation of Water table in this area is in between 68m and 65m during a year. 4. This region receives the average annual rainfall of 800mm to 900mm. The surrounding area is practiced by the seasonal cultivation. The existing land use pattern is given as under.

Table No-4

Sl. No.	Land Use	Present Area (Ha)	Area in use during the quarrying period (Ha)
1.	Quarrying Pit	0.06.50	3.86.00
2.	Infrastructure	Nil	0.02.00
3.	Roads	Nil	0.01.00
4.	Green Belt	Nil	0.86.00
5.	Unutilized	4.68.50	Nil
	Total =	**4.75.00**	**4.75.00**

10.2	Water Regime	:	Water table in this area is noticed at a depth of 68m and presently, in the proposed mining plan only 38m below ground level and 48m depth has been envisaged as workable depth for safe & economic quarrying for the entire lease period. hence, it will not affect the ground water depletion of this area.
10.3	Flora and Fauna	:	Except acacia bushes, no other valuable trees are noticed in the applied area. Further, neither flora of botanical interest nor fauna of zoological interest is noticed in this area.
10.4	Climatic conditions	:	Generally subtropical climatic condition prevails throughout the year and there is no sharp variation in climate. This District receives rain both in south west and north east monsoon. The average rainfall is about 800mm to 900mm and the temperature ranges from 18°C during winter and to a maximum of 42°C during the summer.

6 MAR 2024

<table>
<tr><td>10.5</td><td>Human Settlement</td><td>:</td><td>The nearest habitations with the population is given as under.
Table No-5<table><tr><th>S. No</th><th>Name of the Village</th><th>Approximate distance & Direction from lease applied area</th><th>Approximate population</th></tr><tr><td>1.</td><td>Tennampundi</td><td>1.4Km - NE</td><td>250</td></tr><tr><td>2.</td><td>Karuppur</td><td>2.7km - NW</td><td>500</td></tr><tr><td>3.</td><td>Bramadesam</td><td>2.0km - SE</td><td>700</td></tr><tr><td>4.</td><td>Alangaipakkam</td><td>1.5km - SW</td><td>300</td></tr></table></td></tr>
<tr><td>10.6</td><td>Plan for Air, Dust Suppression</td><td>:</td><td>Air or dust expected to be generated from drilling process, hauling roads, places of excavation etc., will be suppressed by periodical wetting of land by water spraying. Wet drilling and dust extractor arrangements will be provided to drilling units so as to control raise of dust from the site of drilling. Operators, those exposed directly to such conditions will be provide such protective equipment like mask, ear plug, helmet, gloze etc., as per the Mines Act.</td></tr>
<tr><td>10.7</td><td>Plan for Noise Control</td><td>:</td><td>Quarrying of Rough Stone will be carried out by drilling and blasting by using low power explosives, and hence, noise will be very minimum. However, periodical noise level monitoring will be carried out to check the noise level in and around the quarry site. Nowhere the noise level should exceed the permissible limit of 80db during the quarry working hours.</td></tr>
<tr><td>10.8</td><td>Environmental Impact Assessment Statement Describing Impact on mining on the next Five years</td><td>:</td><td>The mining plan proposed is for a small production of Rough stone without involving deep hole drilling and heavy blasting. Such limited mining activity is not likely to cause any impact adversely on environment as far as pollution of air, water and noise is concerned, anyhow environmental impact studies will be conducted as per EIA notification issued by MOEF.</td></tr>
</table>

10.9	Proposal for Waste Management	:	There is no waste anticipated in this rough stone quarry operation.
10.10	Proposal of Reclamation of Land affected during mining activities and at the end of mining.	:	In the proposed mining plan 38m (below ground level) and 48m depth has been envisaged as workable depth for safe & economic mining during the lease period. Hence, after quarry reaches ultimate pit limit (for this lease period) of 48m depth, fencing will be constructed around the quarried pits to prevent inherent entry of the public and cattle.
10.11	Program for Afforestation	:	The 7.5m safety distance along the lease boundary has been identified to be utilized for afforestation Appropriate native species of Neem/Pungan trees will be planted in the first year. Nearly 8600Sqm area is proposed to use under afforestation by planting 1032nos of Neem/Pungan trees during first year with an anticipated survival rate of 80%. The Quarry landuse, layout and afforestation plan is shown in Plate No.III.
10.12	Proposed Financial Estimate / Budget for (EMP) Environment Management		
	A. Fixed Asset Cost: 1. Land Cost (600000/1Ha)= 2. First aid room and accessories 3. Labour Shed 4. Sanitary Facility **Total=**	: : 	 Rs. 28,50,000 Rs.1,00,000 Rs.1,00,000 Rs.1,00,000 **Rs. 31,50,000/-**
	B. Operational Cost: 1. Machineries 2. Fencing cost **Total**	 : : :	 Rs.90,00,000- Rs. 2,50,000 **Rs.92,50,000/-**

	C.EMP Cost:	:	Budget Provision for the entire quarrying period Air Quality Sampling = Rs. 40,000/- Water Quality Sampling = Rs. 40,000/- Noise Monitoring = Rs. 20,000/- Ground vibration test = Rs. 20,000/-
	Expenditure 1. Drinking water facility 2. Sanitary Arrangements 3. Safety kids 4. Water sprinkling 5. Afforestation **Total=**		 Rs.1,50,000/- Rs. 50,000/- Rs. 50,000/- Rs. 1,50,000/- Rs. 1,50,000/- **Rs. 6,70,000/-**
	Total Project Cost (A+B+C)	:	**Rs. 1,30,70,000/-**
	CSR Cost(2% of Total Project Cost)	:	**Rs. 2,61,400/-**

11.0 Mine Closure Plan:

11.1	Steps proposed for phased restoration, reclamation of already mined out area.	:	There is no proposal for back filling, reclamation and rehabilitation. The quarried pits after the end of the life of lease will be fenced to prevent inherent entry of public and cattles.
11.2	Measures to be under taken on mine closure as per Act & Rules	:	Measures will be taken as per the Acts and Rules. The quarried pit will be fenced by using Barbed wire fencing to prevent inherent entry of public and cattle.
11.3	Mitigation measures to be undertaken for safety and restoration/ reclamation of the already mined out area	:	Mitigation measures: Drilling will be carried out by wet drilling mode to control the dust propagation into the air. Blasting will be carried out on limited scale. Mist Water spraying on haul road is proposed to prevent the dust propagation into the air.

- 6 MAR 2024

12.0 Any Other Details Intend to Furnish by the Applicant:

(i) Permission will be obtained from the District Mines Office to extract the Rough Stone from the Boundary barriers and for slopes.

(ii) Care and precautionary measures will be taken for the safety of workers as per Rules and Acts.

(iii) The applicant will endeavor every attempt to quarry the Rough Stone economically without any wastage and to improve the environment and ecology.

(iv) The Mining Plan is prepared by incorporating the conditions stipulated in the precise area communication issued and relevant mining laws in force.

(v) Any violation pointed out by the inspecting authorities shall be rectified as per the guidelines of the Department.

Prepared by

C.Natarajan, M.Sc.,M.Phil.,
Qualified Person

C.NATARAJAN M.Sc.,M.Phil.,
Qualified Person

Place : Salem
Date : 05.02.2024

This mining plan is approved based on the instructions and guidelines issued by the Commissioner of Geology and mining, Chennai vide letter Rc.No. [illegible] dated 19-11-2012 and based on incorporation of conditions laid by the Assistant Director [illegible] Mining, Viluppuram in precise area communication [illegible]
Rc.No. A1/GM/96/2021 Dated : 02.02.2024

Dated : 06.03.2024

Assistant Director,
Geology and Mining,
Viluppuram.

MB 6/3/24

ANNEXURE 1

ந.க.எண். அ/பு & சு/96/2021
நாள்: 02.02.2024

உதவி இயக்குநர்,
புவியியல் மற்றும் சுரங்கத்துறை அலுவலகம்,
விழுப்புரம்.

குறிப்பாணை

பொருள்: கனிமங்களும் குவாரிகளும் - சிறுகனிமம் - சாதாரண கற்கள் மற்றும் கிராவல் - விழுப்புரம் மாவட்டம் - மரக்காணம் வட்டம் - நல்முக்கல் கிராமம் - பட்டா புல எண்கள்.34/1B1, 35/2B, 35/3, மற்றும் 35/4 ஆகியவற்றில் 4.75.00 ஹெக்டேர் பரப்பளவில் பத்தாண்டுகளுக்கு சாதாரண கற்கள் மற்றும் கிராவல் வெட்டியெடுக்க குவாரி குத்தகை அனுமதி கோரி திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் - பெருமுக்கல் கிராமம் என்பவர் விண்ணப்பம் செய்தது - உரிமம் வழங்க பரிந்துரை செய்து அறிக்கை வரப்பெற்றது - தகுதியான நிலப்பரப்பாக கருதி ஏற்பளிக்கப்பட்ட சுரங்க திட்டம் மற்றும் சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணைய இசைவிணை பெற்று சமர்பிக்கக் கோருதல் - தொடர்பாக.

பார்வை:
1. திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர், எண்.65, மரக்காணம் ரோடு, பெருமுக்கல் கிராமம், மரக்காணம் வட்டம், விழுப்புரம் மாவட்டம் என்பவரின் விண்ணப்பம் நாள்.15.04.2021.
2. சார் ஆட்சியர், திண்டிவனம் அவர்களின் கடித எண். ந.க. அ3/6969/2021, நாள்: 30.10.2023.
3. விழுப்புரம் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை உதவி இயக்குநர் அவர்களின் புலத்தணிக்கை அறிக்கை நாள்: 13.12.2023.

----000----

விழுப்புரம் மாவட்டம், மரக்காணம் வட்டம், பெருமுக்கல் கிராமத்தைச் சேர்ந்த திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் என்பவர் விழுப்புரம் மாவட்டம், மரக்காணம் வட்டம், நல்முக்கல் கிராமம், பட்டா புல எண்கள். 34/1B1 - 2.43.0 ஏர்ஸ், 35/2B - 0.28.0 ஏர்ஸ், 35/3 -0.88.0 ஏர்ஸ் மற்றும் 35/4 -1.16.0 ஏர்ஸ் ஆகியவற்றில் 4.75.00 ஹெக்டேர் பரப்பளவில் உள்ள நிலத்தில் பத்தாண்டுகளுக்கு சாதாரண கற்கள் மற்றும் கிராவல் வெட்டியெடுக்க குவாரி குத்தகை பார்வை 1-ல் காணும் விண்ணப்பத்தினை சமர்பித்துள்ளார்.

மேற்படி விண்ணப்பம் தொடர்பாக, திண்டிவனம் சார்ஆட்சியர் மற்றும் விழுப்புரம் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை, உதவி இயக்குநர் ஆகியோரின் அறிக்கையில் மரக்காணம் வட்டம், நல்முக்கல் கிராமம், பட்டா புல எண்கள். 34/1B1 - 2.43.0 ஏர்ஸ், 35/2B - 0.28.0 ஏர்ஸ், 35/3 0.88.0 ஏர்ஸ் மற்றும் 35/4 -1.16.0 ஏர்ஸ் ஆக மொத்த பரப்பு 4.75.00

ஹெக்டேர் பரப்பளவில் உள்ள பட்டா நிலத்தில் திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் என்பவருக்கு பத்தாண்டுகளுக்கு சாதாரணக்கல் மற்றும் கிராவல் குவாரி உரிமம் வழங்க கீழ்கண்ட நிபந்தனைகளுக்குட்பட்டு அனுமதி வழங்கலாம் என பரிந்துரை செய்துள்ளனர்.

i. விண்ணப்ப புலன்களின் அருகில் உள்ள பட்டா நிலங்களுக்கு 7.5 மீட்டர் பாதுகாப்பு இடைவெளியும் மற்றும் அரசு புறம்போக்கு நிலங்களுக்கு 10 மீட்டர் பாதுகாப்பு இடைவெளியும் விட்டு குவாரிப்பணி மேற்கொள்ளப்பட வேண்டும்.

ii. குவாரிப்பணி மேற்கொள்ளும் போது அருகிலுள்ள அரசு புறம்போக்கு, வாய்க்கால் மற்றும் பட்டா நிலங்களுக்கு எவ்வித இடையூறும் இல்லாமல் குவாரிப்பணி செய்ய வேண்டும்.

iii. குவாரி குத்தகை வழங்கும் முன்பு விண்ணப்பித்துள்ள இடத்தினை DGPS சர்வே பணி மேற்கொண்டு அதன் அறிக்கையை சமர்பிக்க வேண்டும்.

iv. தமிழ்நாடு சிறுகனிம சலுகை விதிகள் 1959 விதி-41ன்படி தகுதிவாய்ந்த நபரால் சுரங்க திட்டம் தயார் செய்து உதவி இயக்குநர் அவர்களின் ஒப்புதல் பெறவேண்டும்.

v. தமிழ்நாடு சிறுகனிம சலுகை விதிகள் 1959 விதி-42ன்படி மாநில சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணையத்திடமிருந்து சுற்றுச்சூழல் சான்று பெற்று சமர்பிக்கப்படவேண்டும்.

எனவே, திண்டிவனம் சார் ஆட்சியர் மற்றும் விழுப்புரம் மாவட்ட புவியியல் மற்றும் சுரங்கத்துறை, உதவி இயக்குநர் ஆகியோரின் பரிந்துரை அறிக்கையின் அடிப்படையில் மரக்காணம் வட்டம், நல்முக்கல் கிராமம், பட்டா புல எண்கள். 34/1B1 - 2.43.0 ஏர்ஸ், 35/2B - 0.28.0 ஏர்ஸ், 35/3 -0.88.0 ஏர்ஸ் மற்றும் 35/4 -1.16.0 ஏர்ஸ் ஆக மொத்த பரப்பு 4.75.00 ஹெக்டேர் பரப்பளவில் 1959-ம் வருட தமிழ்நாடு சிறுகனிம விதிகள், விதி எண்.19-ன்படி மேற்கண்ட நிபந்தனைகளுக்குட்பட்டு 10 (பத்து) வருட காலத்திற்கு திரு.வ.நாகராஜன் த/பெ.வரதராஜ் கவுண்டர் என்பவருக்கு சாதாரணக்கல் மற்றும் கிராவல் குவாரி உரிமம் வழங்குவதற்குரிய தகுதியான நிலப்பரப்பாக கருதப்படுகிறது.

அதன் அடிப்படையில், தமிழ்நாடு சிறு கனிம சலுகை விதிகள் 1959 விதி எண்.41-ன்படி குவாரிப்பணி மேற்கொள்வது தொடர்பாக வரைவு சுரங்க திட்டத்தினை தகுதிவாய்ந்த நபர் (QP) மூலமாக கீழ்கண்ட நிபந்தனைகளுக்குட்பட்டு தயாரித்து அதனை 90 தினங்களுக்குள் உதவி இயக்குநர் (புவியியல் மற்றும் சுரங்கத்துறை) அவர்களின் பரிசீலனைக்கு சமர்ப்பிக்குமாறு விண்ணப்பதாரரை கேட்டுக்கொள்ளப்படுகிறது. மேலும் ஏற்பளிக்கப்பட்ட சுரங்கத்திட்டத்தின் தொடர்ச்சியாக 1959ம் வருடத்திய தமிழ்நாடு சிறுகனிம சலுகை விதிகள், விதி எண்.42-ன்படி சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணையத்தின் தடையின்மை சான்று பெற்று சமர்பிக்கும் பட்சத்தில் மட்டுமே குவாரி உரிமம் வழங்கப்படும் என இதன் மூலம் தெரிவிக்கப்படுகிறது.

i. விண்ணப்ப புலன்களின் அருகில் உள்ள பட்டா நிலங்களுக்கு 7.5 மீட்டர் பாதுகாப்பு இடைவெளியும் மற்றும் அரசு புறம்போக்கு நிலங்களுக்கு 10 மீட்டர் பாதுகாப்பு இடைவெளியும் விட்டு குவாரிப்பணி மேற்கொள்ளப்பட வேண்டும்.

ii. குவாரிப்பணி மேற்கொள்ளும் போது அருகிலுள்ள அரசு புறம்போக்கு, வாய்க்கால் மற்றும் பட்டா நிலங்களுக்கு எவ்வித இடையூறும் இல்லாமல் குவாரிப்பணி செய்ய வேண்டும்.

iii. குவாரி குத்தகை வழங்கும் முன்பு விண்ணப்பித்துள்ள இடத்தினை DGPS சர்வே பணி மேற்கொண்டு அதன் அறிக்கையை சமர்பிக்க வேண்டும்.

22/MAR 2024

உதவி இயக்குநர்,
புவியியல் மற்றும் சுரங்கத்துறை,
விழுப்புரம்.

பெறுநர்

திரு.வ.நாகராஜன்,
த/பெ.வரதராஜ் கவுண்டர்,
எண்.65, மரக்காணம் ரோடு,
பெருமுக்கல் கிராமம்,
மரக்காணம் வட்டம்,
விழுப்புரம் மாவட்டம்

21/3/24

நகல்:-

1. மாநில சுற்றுச்சூழல் தாக்க மதிப்பீட்டு ஆணையம், சென்னை.
2. ஆணையர், புவியியல் மற்றும் சுரங்கத்துறை, கிண்டி, சென்னை.

ANNEXURE 11

மாவட்டம் / District திருச்சி

கிராமம் / Village

தாலுக்கா / Taluk திருச்சி மேற்கு

புல எண். / Field No. 34

பரப்பு / Area : ஹெக்டேர் / ha 6 ஏர் / Acres

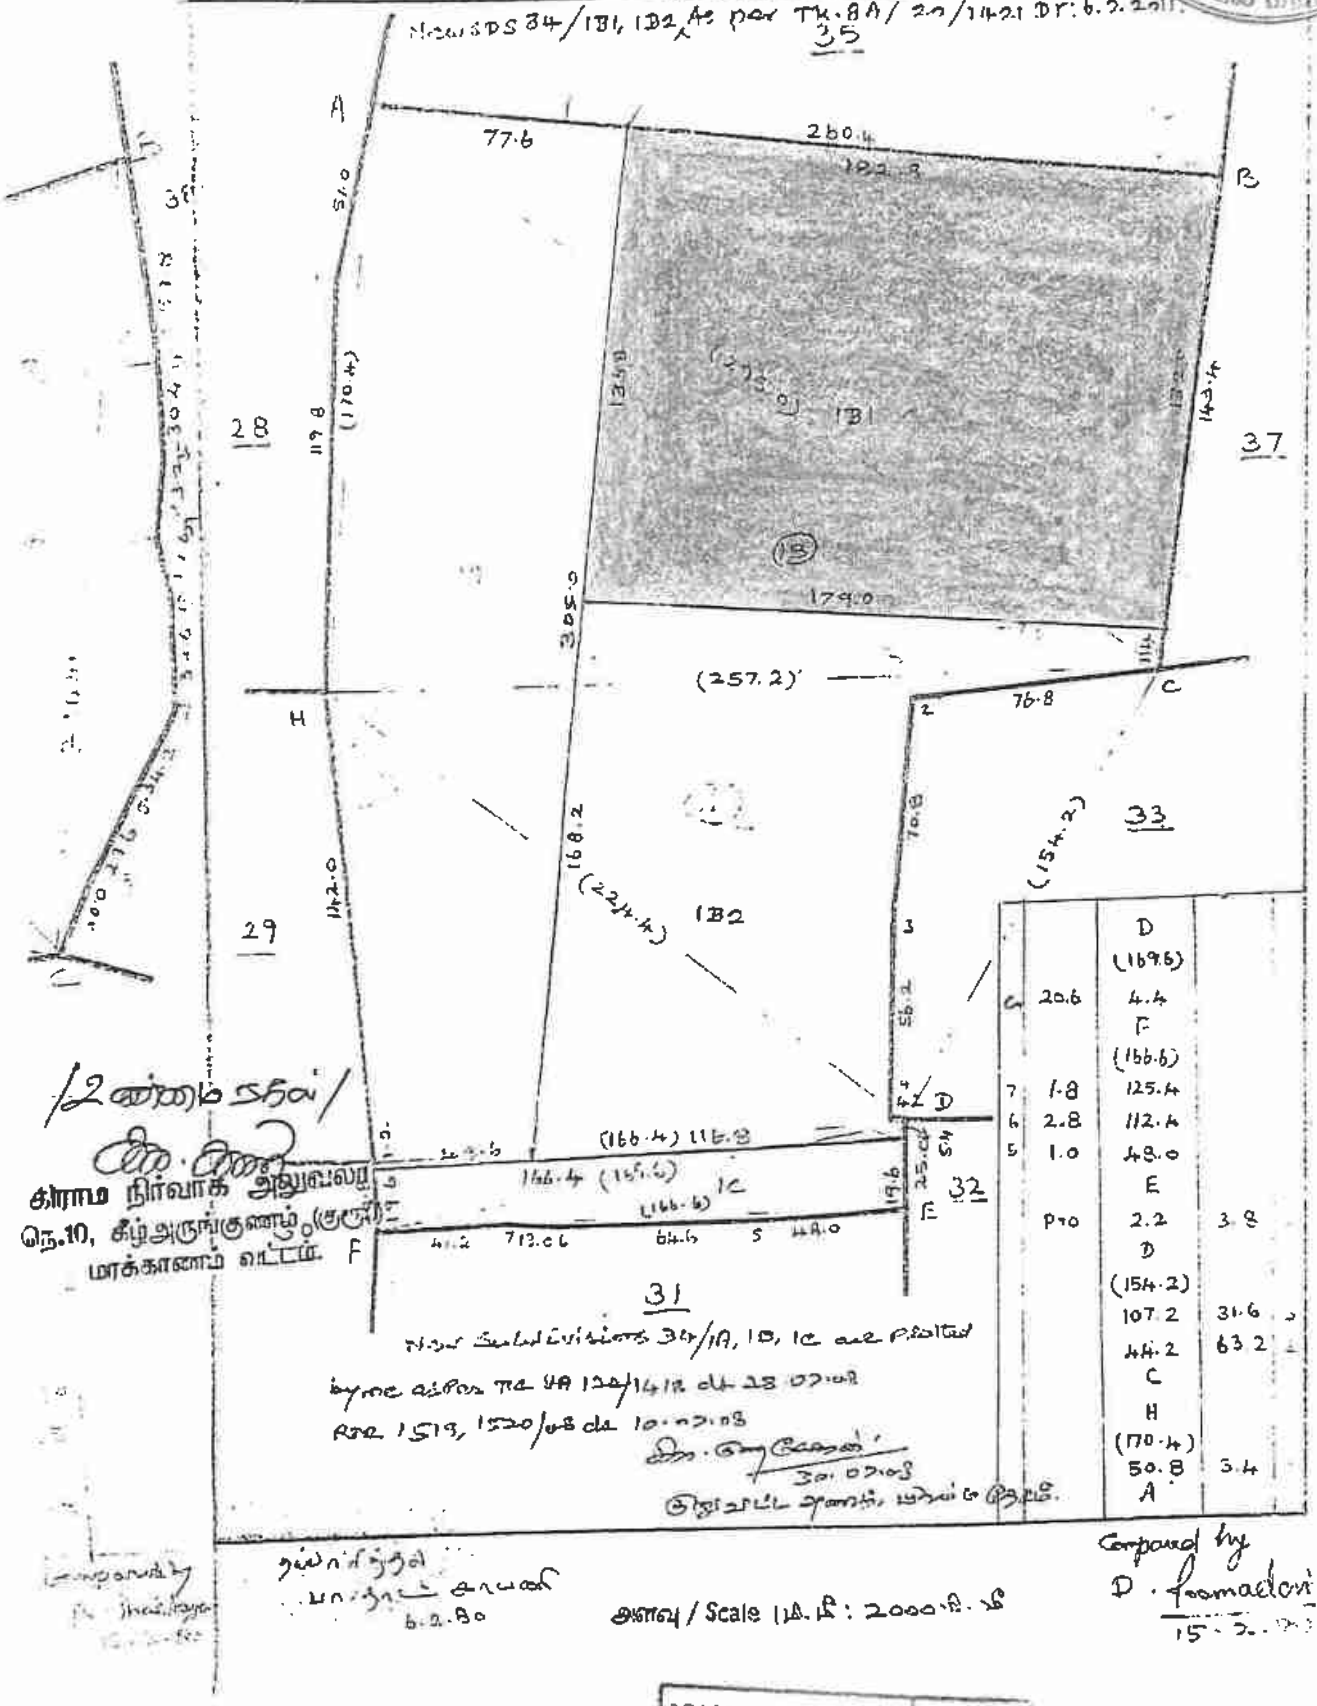

/2 எண்ணம் சதவ்/

கிராம நிர்வாக அலுவலர்
எண்.10, கீழ்அருங்குணம்(குரும்)
மாக்காணம் வட்டம்.

31

நடப்பு சுழற்சியில் 34/1A, 1B, 1C என பதிவில்
layout வரை TR 4A 124/14/2 dt 28.07.08
RTR 1513, 1520/08 dt 10.12.08
30.07.08
தனிப்பட்ட அனைத்து பகுதியும் திருமி.

நில அளவையர்
பயிற்சி காலம்
6.2.80

அளவு / Scale 1 செ.மீ : 2000 மி.மீ

Compared by
D. Ramadoss
15.2.80

LEASE APPLIED AREA

தென் மேற்காக

தீக்காயம் / [illegible]

பெயர் / Name [illegible]

தீக்காயம்

புல எண். / Field no. 35 பரப்பு / Area : ஹெக்டேர் / ha [illegible] ஏர் / Acres 80.5

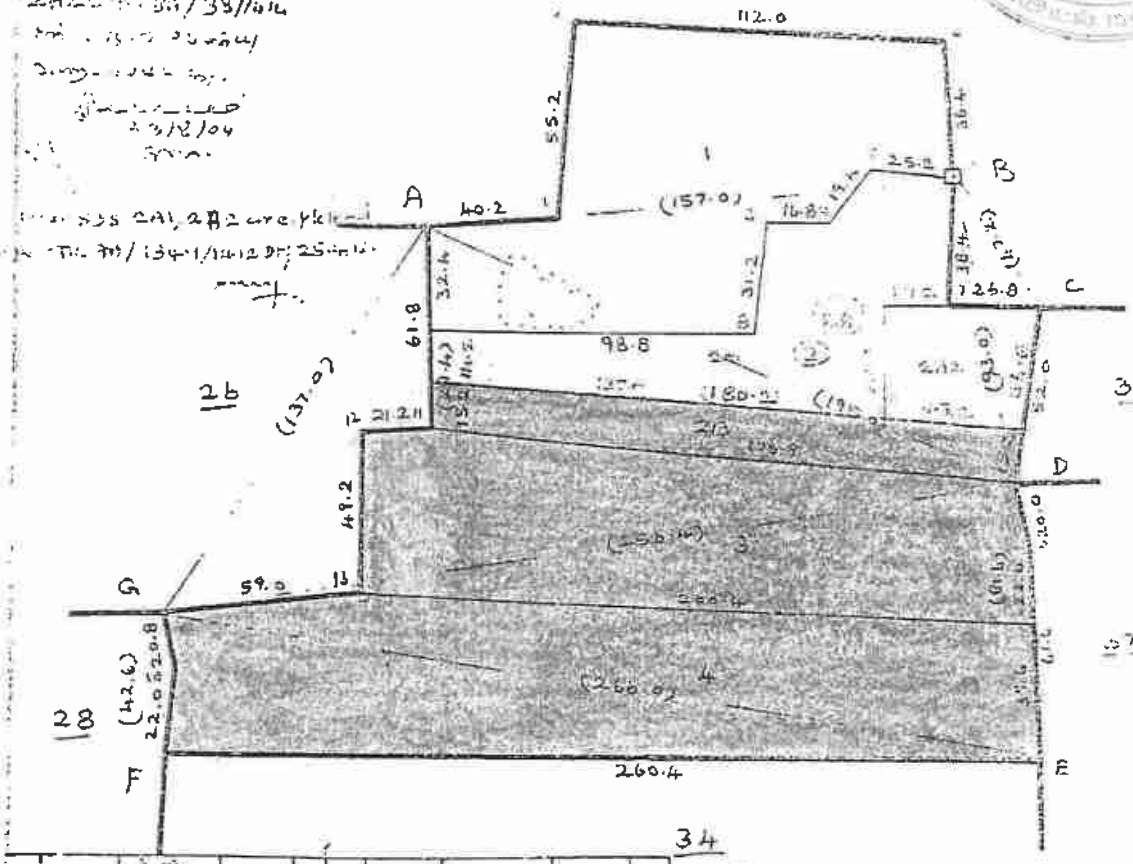

	10.0	152.2					G						
		90.6	11.0	8			(137.0)						
		D			13	46.6	99.8						
		(90.6)			12	17.4	61.2						
	17.4	44.0			11	35.6	50.4						
		B					A						
		C					G						
		(47.2)					(42.6)						
		31.8	22.0	7			21.8	2.2	10				
		F					F						
			pro				D						
							(81.6)						
							61.8	2.0	9				
	3.8	130.4					E						
		119.6	10.8	4			A						
		103.0	8.8	3			(195.0)						
	53.4	49.2			dk	21.0	174.6			F	42.2	260.4	
		40.2	1.0	1			167.6	Line	dk				
		A					157.0	Line	dk				

							A						
							(195.0)						
							55.4	74.0	15				
							D						
							G						
							(266.0)						
							22.0	78.4	D				
							E						

உண்மைநகல்

[illegible]

ம நிர்வாக அலுவலர்

கீழ்அருங்குணம் (குறுப்)

ரக்காணம் வட்டம்

தயாரித்தல்

[illegible]

6.2.80

அளவு / Scale 1 மி.மீ : 2000 மி.மீ

Compared by

D. [illegible]

15.2.[illegible]

LEASE APPLIED AREA

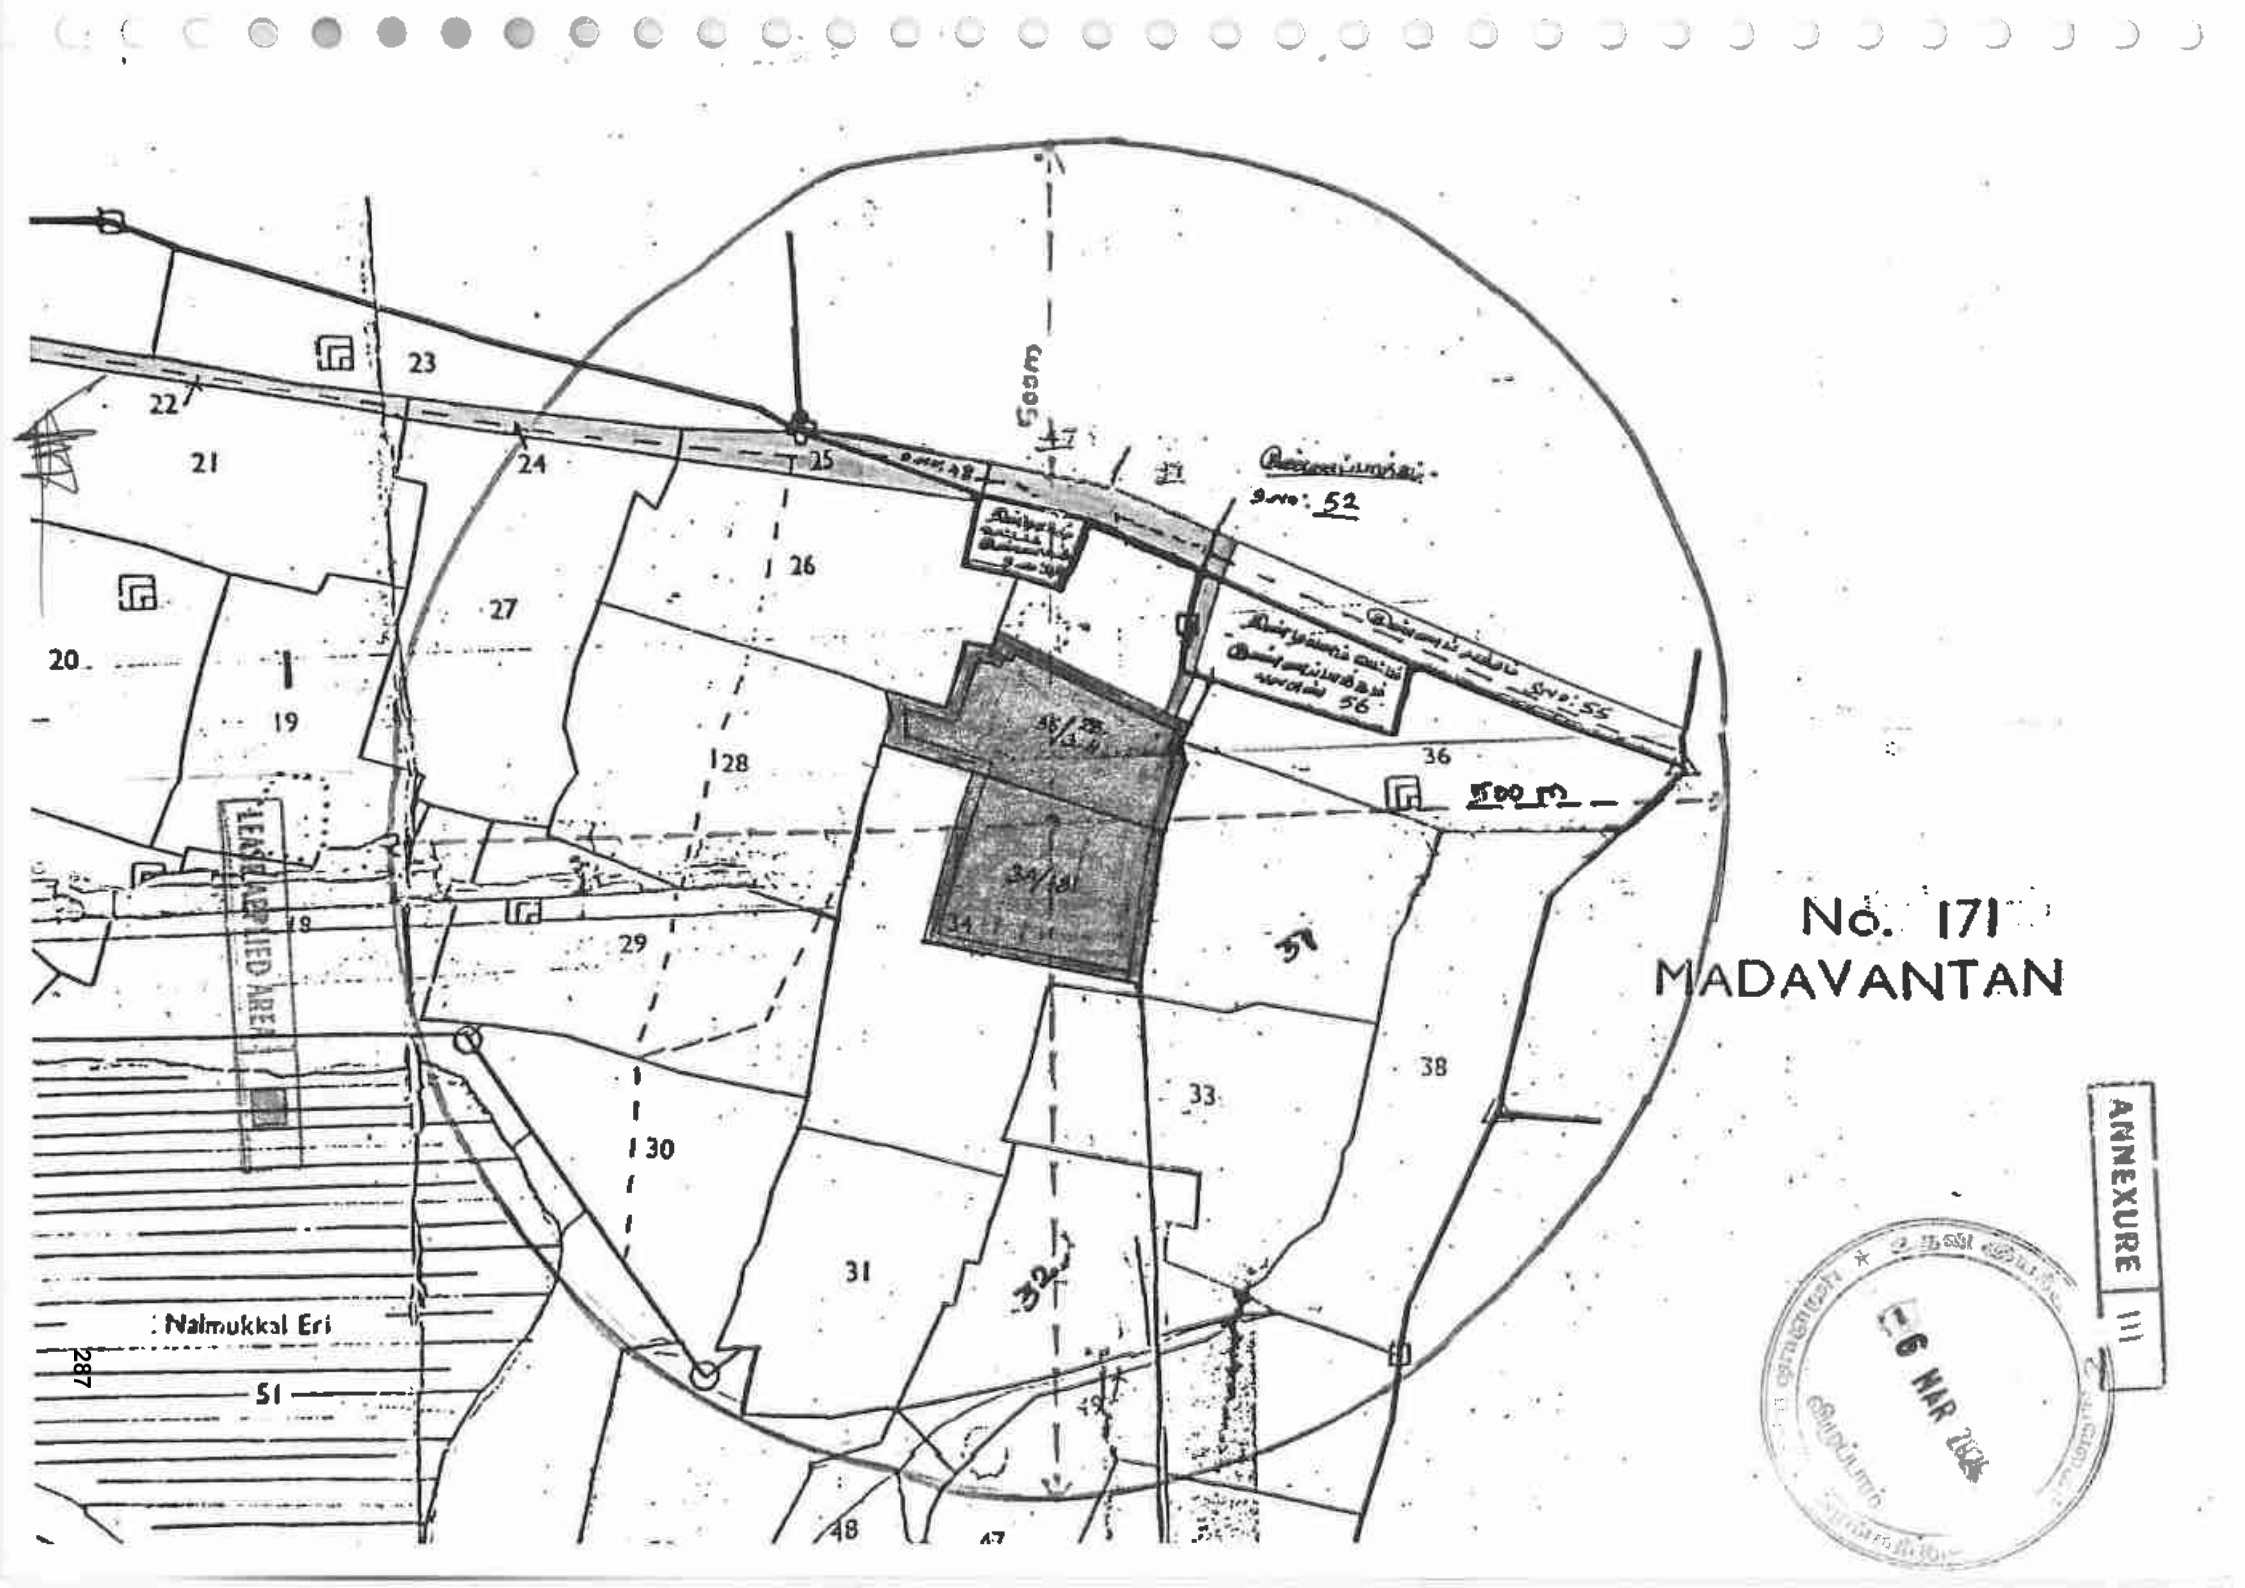
No. 171
MADAVANTAN
ANNEXURE III
16 MAR 2021
Naimukkal Eri
LEASED AREA
22
23
24
25
21
20
19
26
27
28
29
30
31
32
33
34/1
34/2
36
38
51
48
47
287

ANNEXURE IV

06 MAR 2024

விழுப்புரம்

தமிழக அரசு

வருவாய்த் துறை

நில உரிமை விபரங்கள் : இ. எண் 10(1) பிரிவு

மாவட்டம் : விழுப்புரம் வட்டம் : மரக்காணம்

வருவாய் கிராமம் : நல்முக்கல் பட்டா எண் : 425

உரிமையாளர்கள் பெயர்

1. வரதராஜிகவுண்டர் தந்தை நாகராஜன்

புல எண்	உட்பிரிவு	புன்செய்		நன்செய்		மற்றவை		குறிப்புரைகள்
		பரப்பு	தீர்வை	பரப்பு	தீர்வை	பரப்பு	தீர்வை	
		ஹெக் - ஏர்	ரூ - பை	ஹெக் - ஏர்	ரூ - பை	ஹெக் - ஏர்	ரூ - பை	
34	1B1	2 - 43.00	6.70	--	--	--	--	rtr2591/11--- -- 22-06-2011
35	2B	0 - 28.00	0.80	--	--	--	--	D5679/2011--8A38/1414 -- 09-08-2004
35	3	0 - 88.00	2.42	--	--	--	--	D5679/2011--- -- 13-08-2004
35	4	1 - 16.00	3.19	--	--	--	--	D5679/2011--- -- 25-08-2003
		4 - 75.00	13.11					

குறிப்பு2 :

1. மேற்கண்ட தகவல் / சான்றிதழ் நகல் விவரங்கள் மின் பதிவேட்டிலிருந்து பெறப்பட்டவை. இவற்றை தாங்கள் **https://eservices.tn.gov.in** என்ற இணைய தளத்தில் **07/11/157/00425/110761** என்ற குறிப்பு எண்ணை உள்ளீடு செய்து உறுதி செய்துகொள்ளவும்.
2. இத் தகவல்கள் 31-01-2021 அன்று 11:01:29 AM நேரத்தில் அச்சடிக்கப்பட்டது.
3. கைப்பேசி கேமராவின்2D barcode படிப்பான் மூலம் படித்து 3G/GPRS வழி இணையதளத்தில் சரிபார்க்கவும்

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)
34	181	243	670	435	[illegible]	—	—	—	—	—	—
35	28	001	066	435	—do—		—	—	—	—	—
35	3	066	248	435	—do—		—	—	—	—	—
35	4	166	319	435	—do—		—	—	—	—	—

[illegible]

[illegible]

[illegible]

ANNEXURE VI

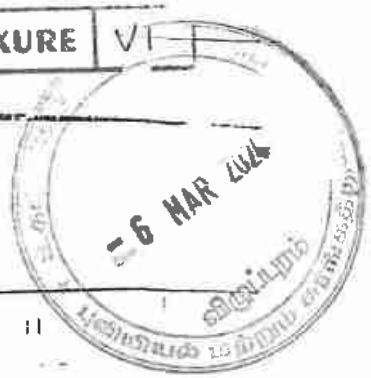

10

எண் 160 தமிழ்நாடு

1	2	3	4	5	6	7	8	9	10	11
								ஹெ. ஏ. சா.	ரூ. பை.	
34	...	25-2 31-3	ச	பு	...	8-4	7	2 75	6 35·0	10 84	294 பு. சக்ரபாணி முதலியார் (1). பி. ரெங்கனாத செட்டியார் (2). கு. வெங்கட செட்டியார் (3). க. அங்கம்மாள் (4)
35	1	29-1	ச	நீ ம் ஞ்	...	...	...	...	0 87·5	...	
	2	-2	ச	பு	...	8-4	7	2 75	0 89·0	2 45	199 பி. ரெங்கன்ற செட்டியார்.
	3	25-2	ச	பு	...	8-4	7	2 75	0 88·0	2 42	199 பி. ரெங்கன்ற செட்டியார்.
	4	-2	ச	பு	...	8-4	7	2 75	1 16·0	3 19	28 சா. கஸ்தூரி அம்மாள்.
									3 80·5	8 06	
36	...	28-3	ச	பு	...	8-4	7	2 75	3 02·0	8 31	105 ஆ. அட்டே
37	1	27-1A	ச	பு	...	8-4	7	2 75	0 62·0	1 71	179 க. ராமசுவ செட்டியார்.
	2	-1B	ச	பு	...	8-4	7	2 75	0 58·0	1 60	27 க. கண்ணுசாமி செட்டியார்.
	3	-1C -3	ச	பு	...	8-4	7	2 75	1 14·0	3 14	45 வே. சோதுலதான செட்டியார்.
	4	-1D	ச	பு	...	8-4	7	2 75	0 68·5	1 88	106 பா. நாராயண
	5	-2	ச	பு	...	8-4	7	2 75	0 40·0	1 10	45 வே. சோதுராஜ செட்டியார்.
	6	-4A	ச	பு	...	8-4	7	2 75	0 31·0	0 85	27 க. கண்ணுசாமி செட்டியார்.
		-4B	ச	பு	...	8-4	7	2 75	0 77·0	0 74	45 வே. சோதுலதான செட்டியார்.
									4 00·5	11 0	
	1	29-1	ச	பு	...	8-4	7	2 75	1 20·0	3 30	126 தலைவர் பூமிதான இயக்கம் மதுரை.
	2	-2	ச	பு	...	8-4	7	2 75	0 66·0	1 82	50 சா. சம்பத்து
	3	-3 30-1A	ச	பு	...	8-4	7	2 75	0 88·0	2 42	107 பி. நாராயண கவுண்டர்.
	4	-1B	ச	பு	...	8-4	7	2 75	1 04·5	2 87	132 வே. பெருமாள் செட்டியார்.

ரு நிர்வாக அலுவலர்
), கீழ்அருங்குணம் (மே.ப)
ரைக்காணம் வட்டம்

அ-பதிவேடு விவரங்கள் - ஊரகம்

மாவட்டம் : விழுப்புரம்

வட்டம் : மரக்காணம்

கிராமம் : நல்முக்கல்

1. புல எண்	**34**	9. மண் வயனமும் ரகமும்	**8 - 4**
2. உட்பிரிவு எண்	**1B1**	10. மண் தரம்	**7**
3. பழைய புல உட்பிரிவு எண்	**34-1B**	11. தீர்வை (ரூ - ஹெ)	**2.75**
4. பகுதி	**P**	12. பரப்பு (ஹெக்டேர் - ஏர்)	**2 - 43.00**
5. அரசு / ரயத்துவாரி	**ரயத்துவாரி**	13. மொத்த தீர்வை (ரூ - பை)	**6.70**
6. நிலத்தின் வகை	**புஞ்சை**	14. பட்டா எண்	**425**
7. பாசன ஆதாரம்	-	15. குறிப்பு	-
8. இரு போகமா	-	16. பெயர்	**1.நாகராஜன்**

குறிப்பு:

1. மேற்கண்ட தகவல் / சான்றிதழ் நகல் விவரங்கள் மின் பதிவேட்டிலிருந்து பெறப்பட்டவை. இவற்றை தாங்கள் **https://eservices.tn.gov.in** என்ற இணைய தளத்தில் **07/11/157/34/1B1/100761** என்ற குறிப்பு எண்ணை உள்ளீடு செய்து உறுதி செய்துகொள்ளவும்.

அ-பதிவேடு விவரங்கள் - ஊரகம்

மாவட்டம் : விழுப்புரம்

வட்டம் : மரக்காணம்

கிராமம் : நல்முக்கல்

1. புல எண்	**35**	9. மண் வயனமும் ரகமும்	**8 - 4**
2. உட்பிரிவு எண்	**2B**	10. மண் தரம்	**7**
3. பழைய புல உட்பிரிவு எண்	**28-2**	11. தீர்வை (ரூ - ஹெ)	**2.75**
4. பகுதி	-	12. பரப்பு (ஹெக்டேர் - ஏர்)	**0 - 28.00**
5. அரசு / ரயத்துவாரி	**ரயத்துவாரி**	13. மொத்த தீர்வை (ரூ - பை)	**0.80**
6. நிலத்தின் வகை	**புஞ்சை**	14. பட்டா எண்	**425**
7. பாசன ஆதாரம்	-	15. குறிப்பு	-
8. இரு போகமா	-	16. பெயர்	**1.நாகராஜன்**

குறிப்பு:

1. மேற்கண்ட தகவல் / சான்றிதழ் நகல் விவரங்கள் மின் பதிவேட்டிலிருந்து பெறப்பட்டவை. இவற்றை தாங்கள் **https://eservices.tn.gov.in** என்ற இணைய தளத்தில் **07/11/157/35/28/100761** என்ற குறிப்பு எண்ணை உள்ளீடு செய்து உறுதி செய்துகொள்ளவும்.

ANNEXURE VII

08 MAR 2024

आधार

இந்திய அரசாங்கம்
Unique Identification Authority of India
Government of India

பதிவு அடையாளம் / Enrollment No.: 2192/50252/43504

To,
நாகராஜன் வரதராஜ்
Nagarajan Varadharaj
S/O Varadharaj
65
MARAKANAM ROAD
TINDIVANAM-TALUK
Perumukkal
Perumukkal Viluppuram
Tamil Nadu 604301
9626809118

11/01/2013

Ref: 170 / 04W / 55738 / 55800 / P

SB491970745FH

உங்கள் ஆதார் எண் / Your Aadhaar No. :

4487 0259 3457

எனது ஆதார், எனது அடையாளம்

இந்திய அரசாங்கம்
Government of India

நாகராஜன் வரதராஜ்
Nagarajan Varadharaj

தந்தை : வரதராஜ்
Father : VARADHARAJ
பிறந்த நாள் / DOB : 08/07/1969
ஆண்பால் / Male

4487 0259 3457

எனது ஆதார், எனது அடையாளம்

Government of India

AADHAAR

தகவல்

- ஆதார் அடையாளத்திற்கான சான்று குடியுரிமைக்கு அல்ல .
- அடையாள சான்றை இணையதளம் மூலம் உறுதிப்படுத்திக் கொள்ளவும் .

INFORMATION

- Aadhaar is proof of identity, not of citizenship .
- To establish identity, authenticate online .

04W / 55738

- ஆதார் நாடு முழுவதிலும் செல்லுபடியாகும் .
- வருங்காலத்தில் அரசு மற்றும் அரசு சாரா சேவைகளை பயன்படுத்திக் கொள்ள ஆதார் உதவிகரமாக இருக்கும் .
- Aadhaar is valid throughout the country .
- Aadhaar will be helpful in availing Government and Non-Government services in future .

ஆதார்
Unique Identification Authority of India

முகவரி: S/O வரதராஜ், எண் 65, மரக்காணம் ரோடு, திண்டிவனம்-வட்டம், பெருமுக்கல், பெருமுக்கல், விழுப்புரம், தமிழ்நாடு, 604301

Address: S/O Varadharaj, 65, MARAKANAM ROAD, TINDIVANAM-TALUK, Perumukkal, Perumukkal, Viluppuram, Tamil Nadu, 604301

4487 0259 3457

1947

help@uidai.gov.in

www.uidai.gov.in

CamScanner

ANNEXURE VIII

CHETTINAD CEMENT CORPORATION LTD.,

(Regd. Office: RANI SEETHAI HALL BUILDING IV & V FLOORS, 603, ANNA SALAI, MADRAS-600006.)
WORKS OFFICE: PULIYUR.

TELE: PHONE 21144 / 22744 / 21745 KARUR
GRAM "CEMENT" Puliyur C.F.
Telex: 0456-215.
STD Code: 04324

All Correspondences to
Kunararajah Muthaiah Nagar,
PULIYUR CEMENT FACTORY POST 639114
(Karur Taluk, Trichy Dt.)

T.RAJU.,B.E.,
MINES MANAGER & DY.GENERAL MANAGER.

22nd September,1987.

CERTIFICATE.

This is to certify that Mr.C.Natarajan has been working as a Geologist from 14-12-1979 to till date. He has been incharge of supervision of day to day functions in respect of Exploration, Preparation of Geological Plans & Sections, Preparation of Mines Plans, and Quality control and other allied mining activities in the following Pits of our Seethainagar Limestone Mines in Anna District.

Name of the Pit.		Average Raising/day.
1. Alambadi Pit.	-	1,700 T.
2. Mallapuram Pit.	-	900 T.
3. Karikkali Pit.	-	150 T.
Total.	-	2,750 T.

He has got nearly Eight years of total experience in our Mines in the above supervisory capacity.

for CHETTINAD CEMENT CORPORATION LTD.,

(T.RAJU).
Mines Manager & Dy. General Manager.

3269

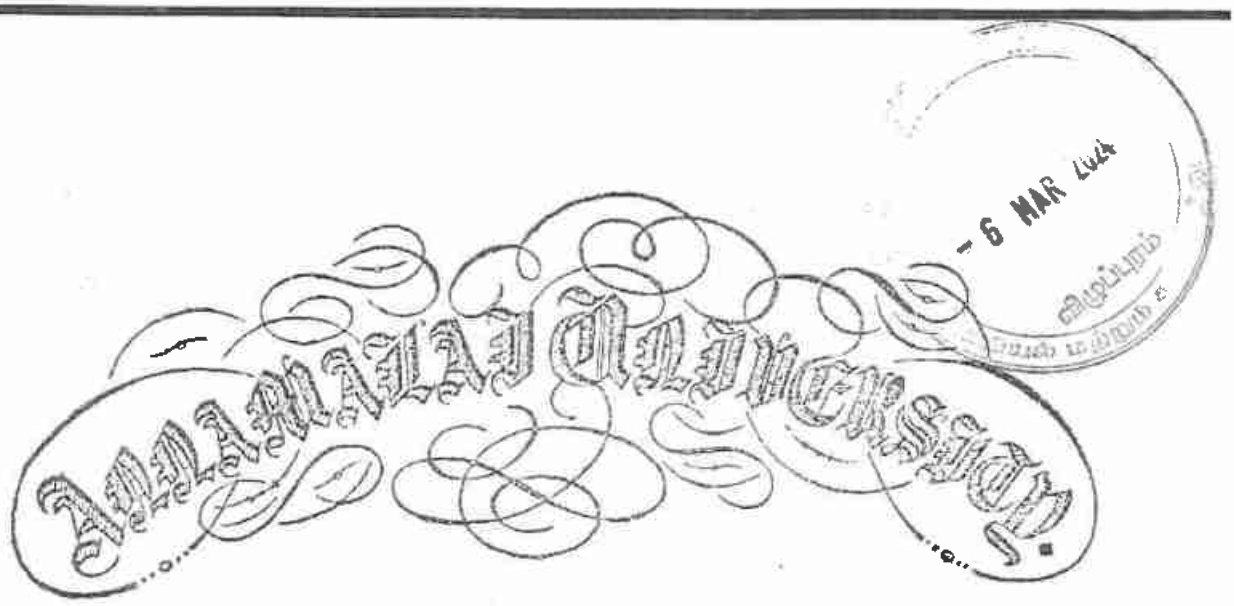

Faculty of Science

The Senate of the Annamalai University hereby makes known that G. Natarajan has been admitted to the Degree of Master of Science (By Examination) in ~~Zoology~~ Geology, he having been certified by duly appointed Examiners at the examination held in ~~April~~ 1976, to be qualified to receive the same and that he was placed in the First Class.

Given under the seal of the University.

Annamalainagar.
~~4th~~ December, 1976.

A. Chandrasekhar
Vice-Chancellor.

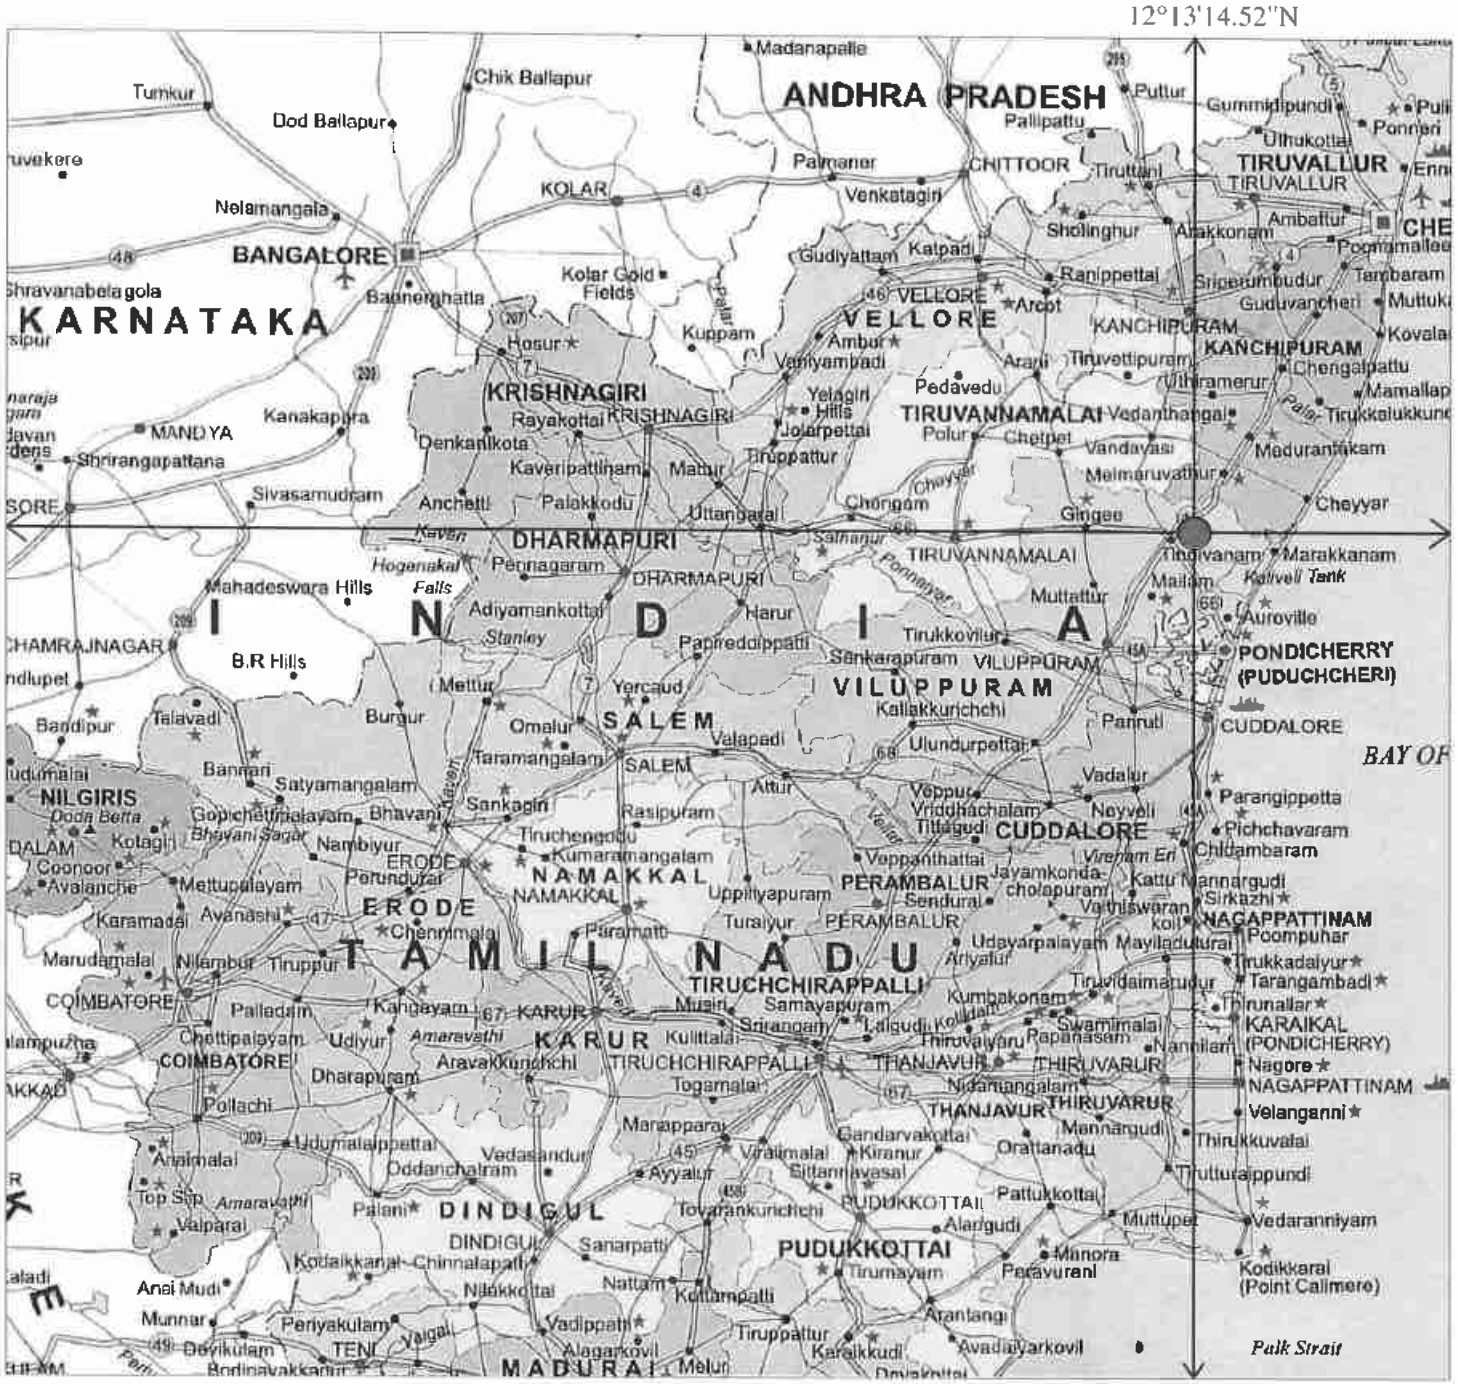

N

PLATE NO-I

DATE OF SURVEY : 03.02.2024

APPLICANT:

THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:

S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

Q. L. APPLIED AREA :

TOPO SHEET NO : 57 P/ 16

LATITUDE :12°13'05.24"N TO 12°13'14.52"N

LONGITUDE :79°46'07.17"E TO 79°46'16.18"E

LOCATION PLAN

NOT TO SCALE

PREPARED BY :

THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN,M.Sc,M.Phil.,
QUALIFIED PERSON

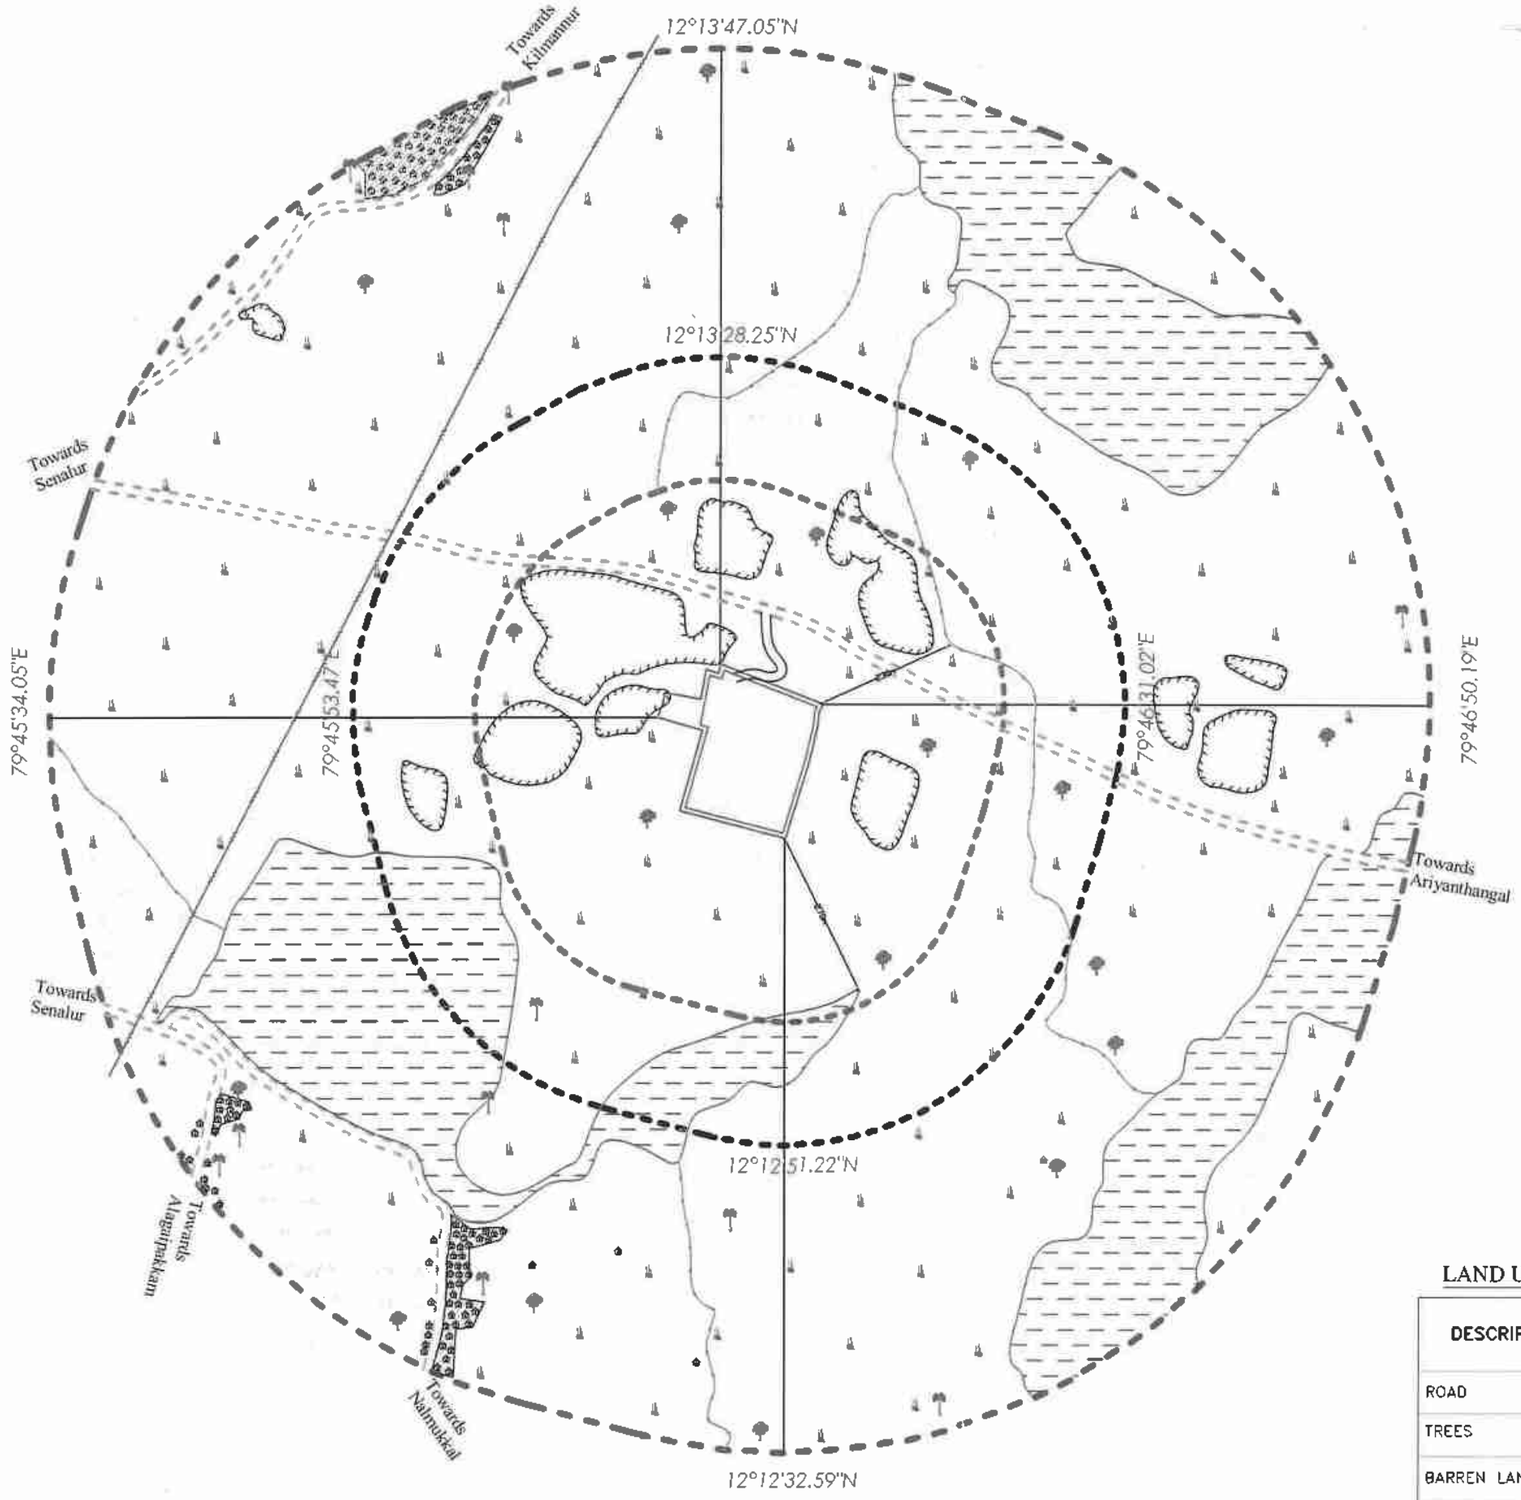

PLATE NO-IA
DATE OF SURVEY : 03.02.2024

APPLICANT:
THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

- 6 MAR

QUARRY LEASE APPLIED AREA:
S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX
TOPO SHEET NO : 57 P/ 16
LATITUDE :12°13'05.24"N TO 12°13'14.52"N
LONGITUDE :79°46'07.17"E TO 79°46'16.18"E

Q.L.APPLIED AREA	
7.5m SAFETY DISTANCE	
300M RADIUS	
500M RADIUS	
1KM RADIUS	
APPROACH ROAD	
PANCHAYAT ROAD	
BARREN LAND	
TREES	
SEASONAL AGRICULTURE	
HABITATIONS	
QUARRY PIT	
TANK	
HT LINE	
ODAI	

LAND USE PATTERN

DESCRIPTION	AREA IN (%)
ROAD	05
TREES	10
BARREN LAND	40
AGRICUTURE LAND	10
HABITATIONS	07
WATER BODIES	28

ENVIRONMENTAL PLAN
SCALE 1: 10,000

PREPARED BY :
THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

297

C.NATARAJAN.M.Sc.M.Phil..,
QUALIFIED PERSON

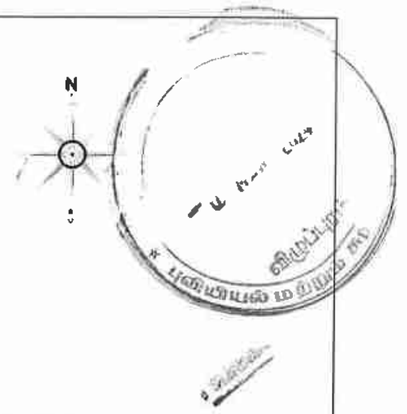

PLATE NO-IB

DATE OF SURVEY : 03.02.2024

APPLICANT:

THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:

S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

TOPO SHEET NO : 57 P/ 16

LATITUDE :12°13'05.24"N TO 12°13'14.52"N

LONGITUDE :79°46'07.17"E TO 79°46'16.18"E

Q.L.APPLIED AREA	
7.5m SAFETY DISTANCE	
300M RADIUS	
500M RADIUS	
1KM RADIUS	
APPROACH ROAD	
PANCHAYAT ROAD	

SATELLITE IMAGERY MAP

SCALE 1: 10,000

PREPARED BY :

THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN,M.Sc,M.Phil.,
QUALIFIED PERSON

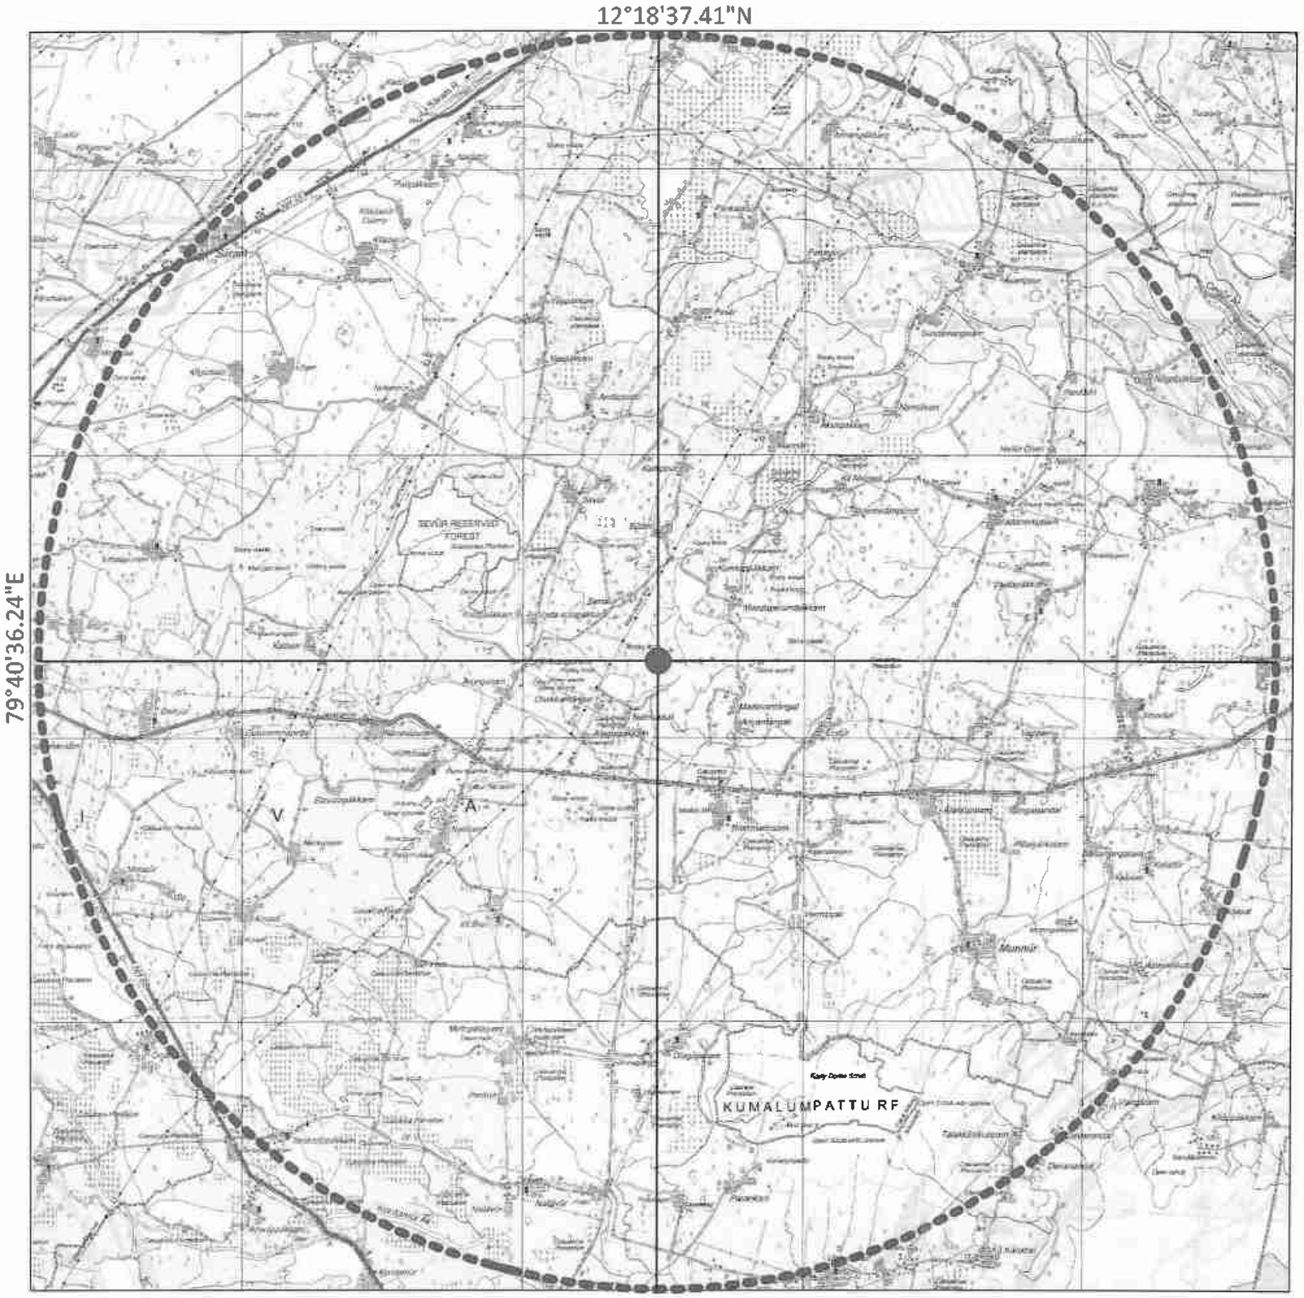

N

PLATE NO-IC

DATE OF SURVEY : 03.02.2024

APPLICANT:

THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

- 6 MAR 2024

QUARRY LEASE APPLIED AREA:

S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

TOPO SHEET NO : 57 P/ 16

LATITUDE :12°13'05.24"N TO 12°13'14.52"N

LONGITUDE :79°46'07.17"E TO 79°46'16.18"E

QUARRY LEASE APPLIED AREA

10KM RADIUS

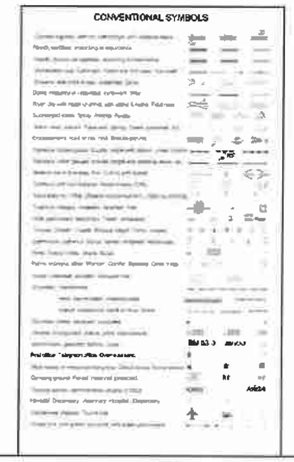

TOPO SKETCH OF QUARRY LEASE APPLIED AREA FOR 10Km RADIUS

SCALE- 1:100000

THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN M.Sc.,M.Phil.,
QUALIFIED PERSON

299

KEY PLAN

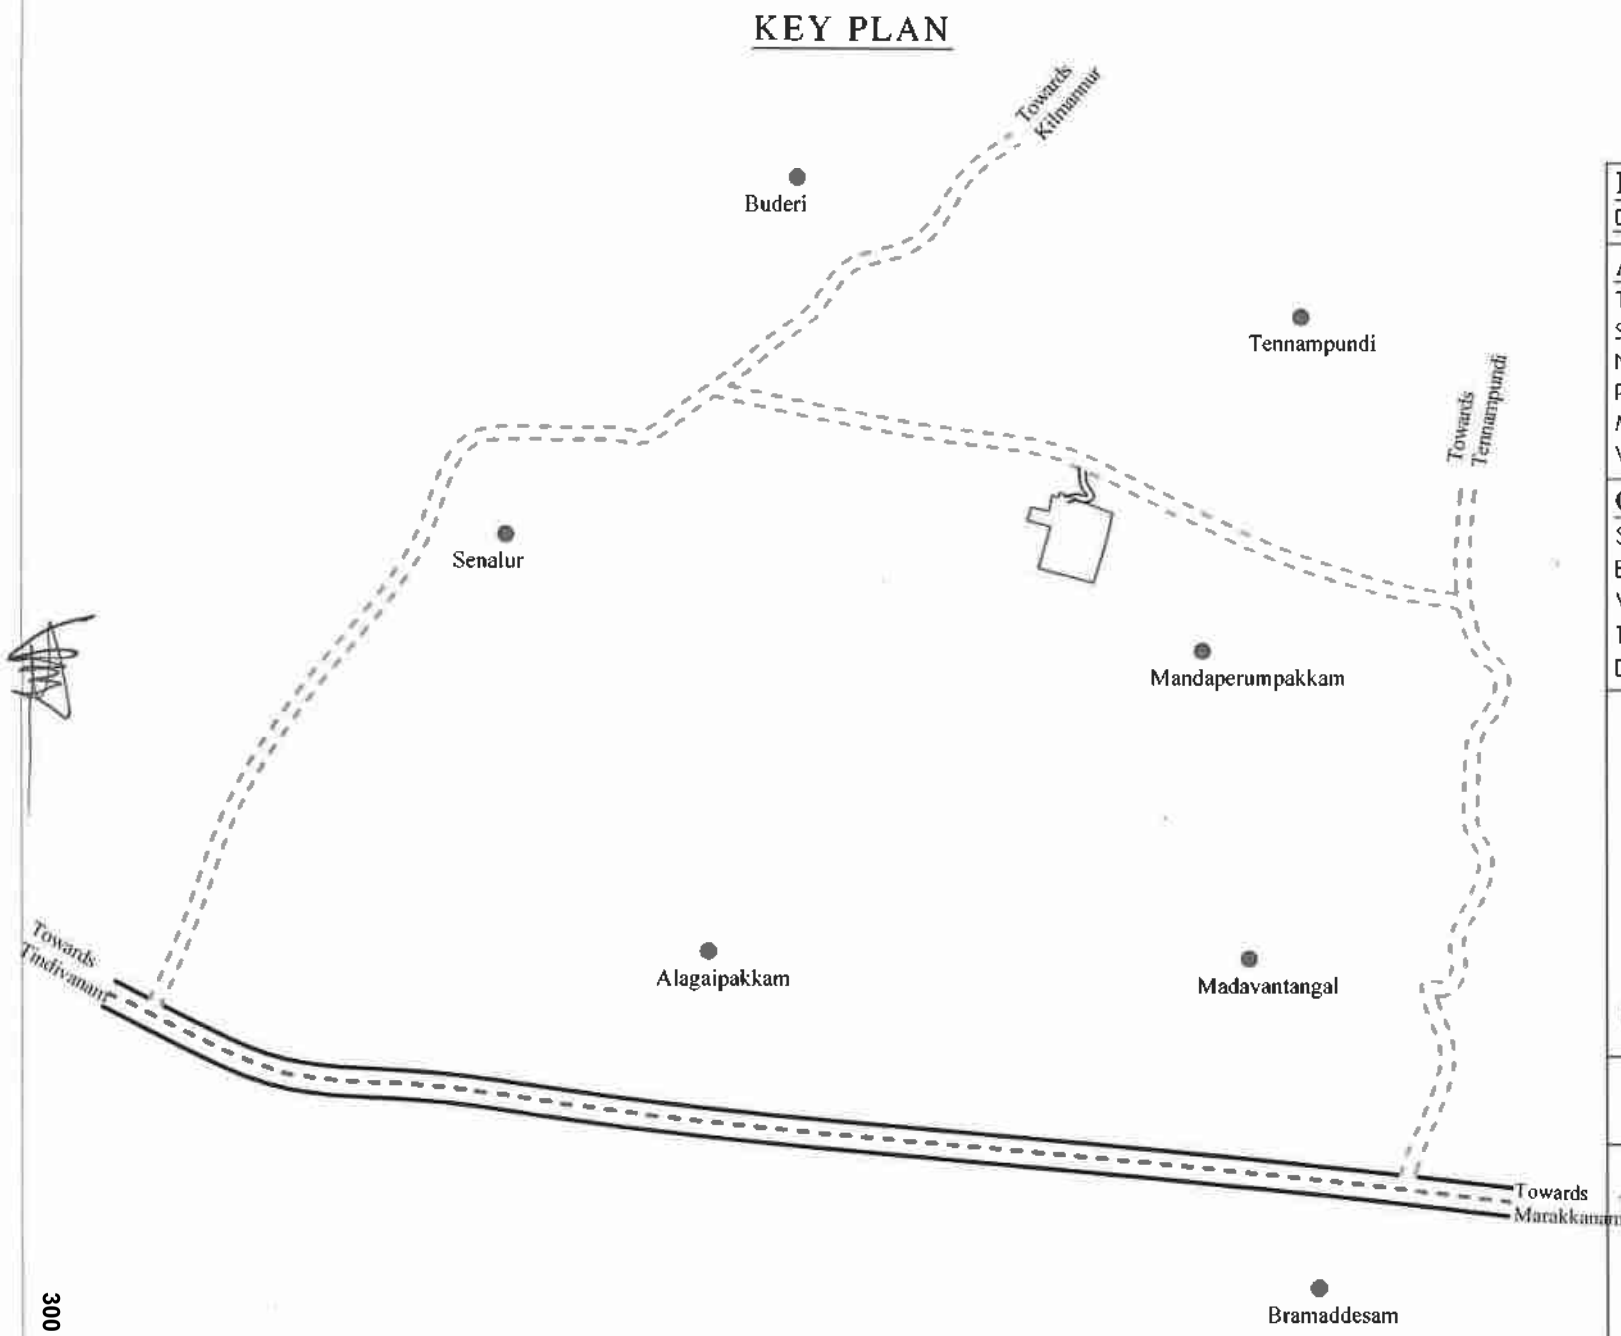

300

PLATE NO-ID

DATE OF SURVEY : 03.02.2024

APPLICANT:

THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:

S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

- Q.L. APPLIED AREA
- APPROACH ROAD
- PANCHAYAT ROAD
- STATE HIGHWAY
- HABITATIONS

KEY PLAN

Not To Scale

PREPARED BY:

THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN,M.Sc,M.Phil.,
QUALIFIED PERSON

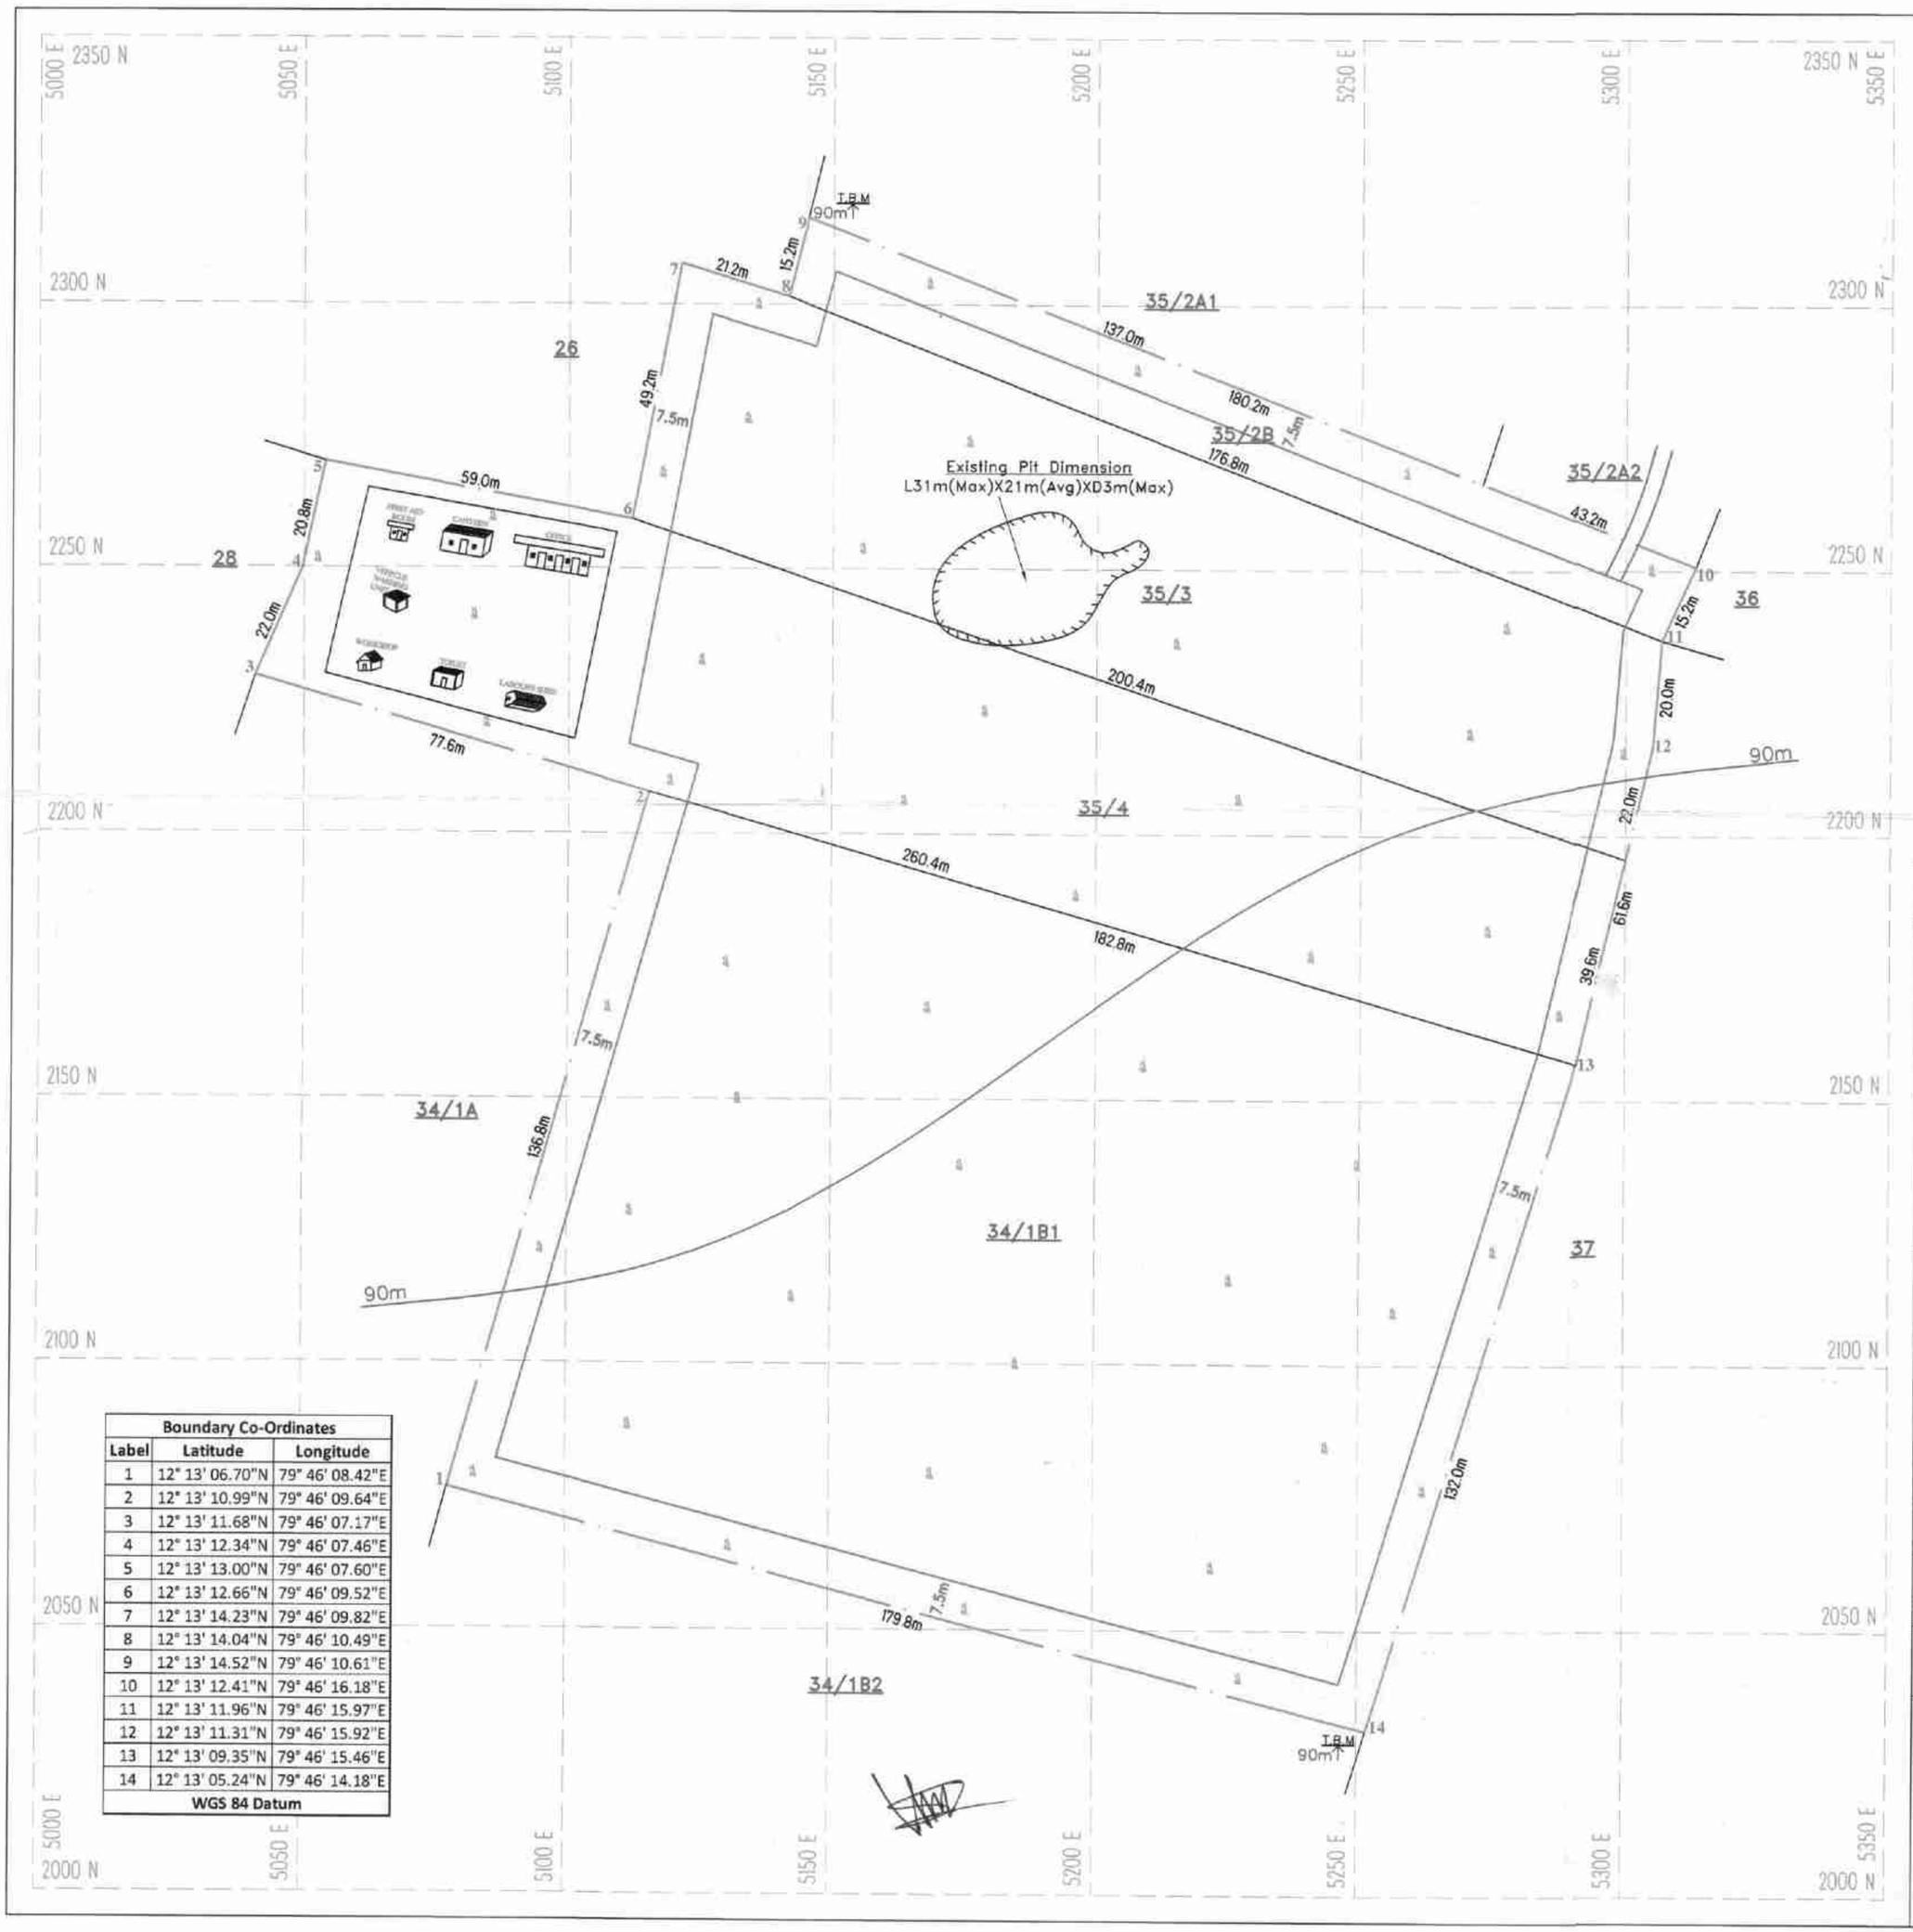

Boundary Co-Ordinates		
Label	Latitude	Longitude
1	12° 13' 06.70"N	79° 46' 08.42"E
2	12° 13' 10.99"N	79° 46' 09.64"E
3	12° 13' 11.68"N	79° 46' 07.17"E
4	12° 13' 12.34"N	79° 46' 07.46"E
5	12° 13' 13.00"N	79° 46' 07.60"E
6	12° 13' 12.66"N	79° 46' 09.52"E
7	12° 13' 14.23"N	79° 46' 09.82"E
8	12° 13' 14.04"N	79° 46' 10.49"E
9	12° 13' 14.52"N	79° 46' 10.61"E
10	12° 13' 12.41"N	79° 46' 16.18"E
11	12° 13' 11.96"N	79° 46' 15.97"E
12	12° 13' 11.31"N	79° 46' 15.92"E
13	12° 13' 09.35"N	79° 46' 15.46"E
14	12° 13' 05.24"N	79° 46' 14.18"E
WGS 84 Datum		

6 MAR 2024

PLATE NO-II

DATE OF SURVEY : 03.02.2024

APPLICANT:

THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:

S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

- Q.LEASE APPLIED BOUNDARY
- 7.5m SAFETY DISTANCE
- TEMPORARY BENCH MARK (T.B.M)
- APPROACH ROAD
- CONTOUR
- SCRUB
- QUARRY PIT

QUARRY LEASE & SURFACE PLAN

SCALE 1 : 1000

PREPARED BY:

THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN,M.Sc,M.Phil,
QUALIFIED PERSON

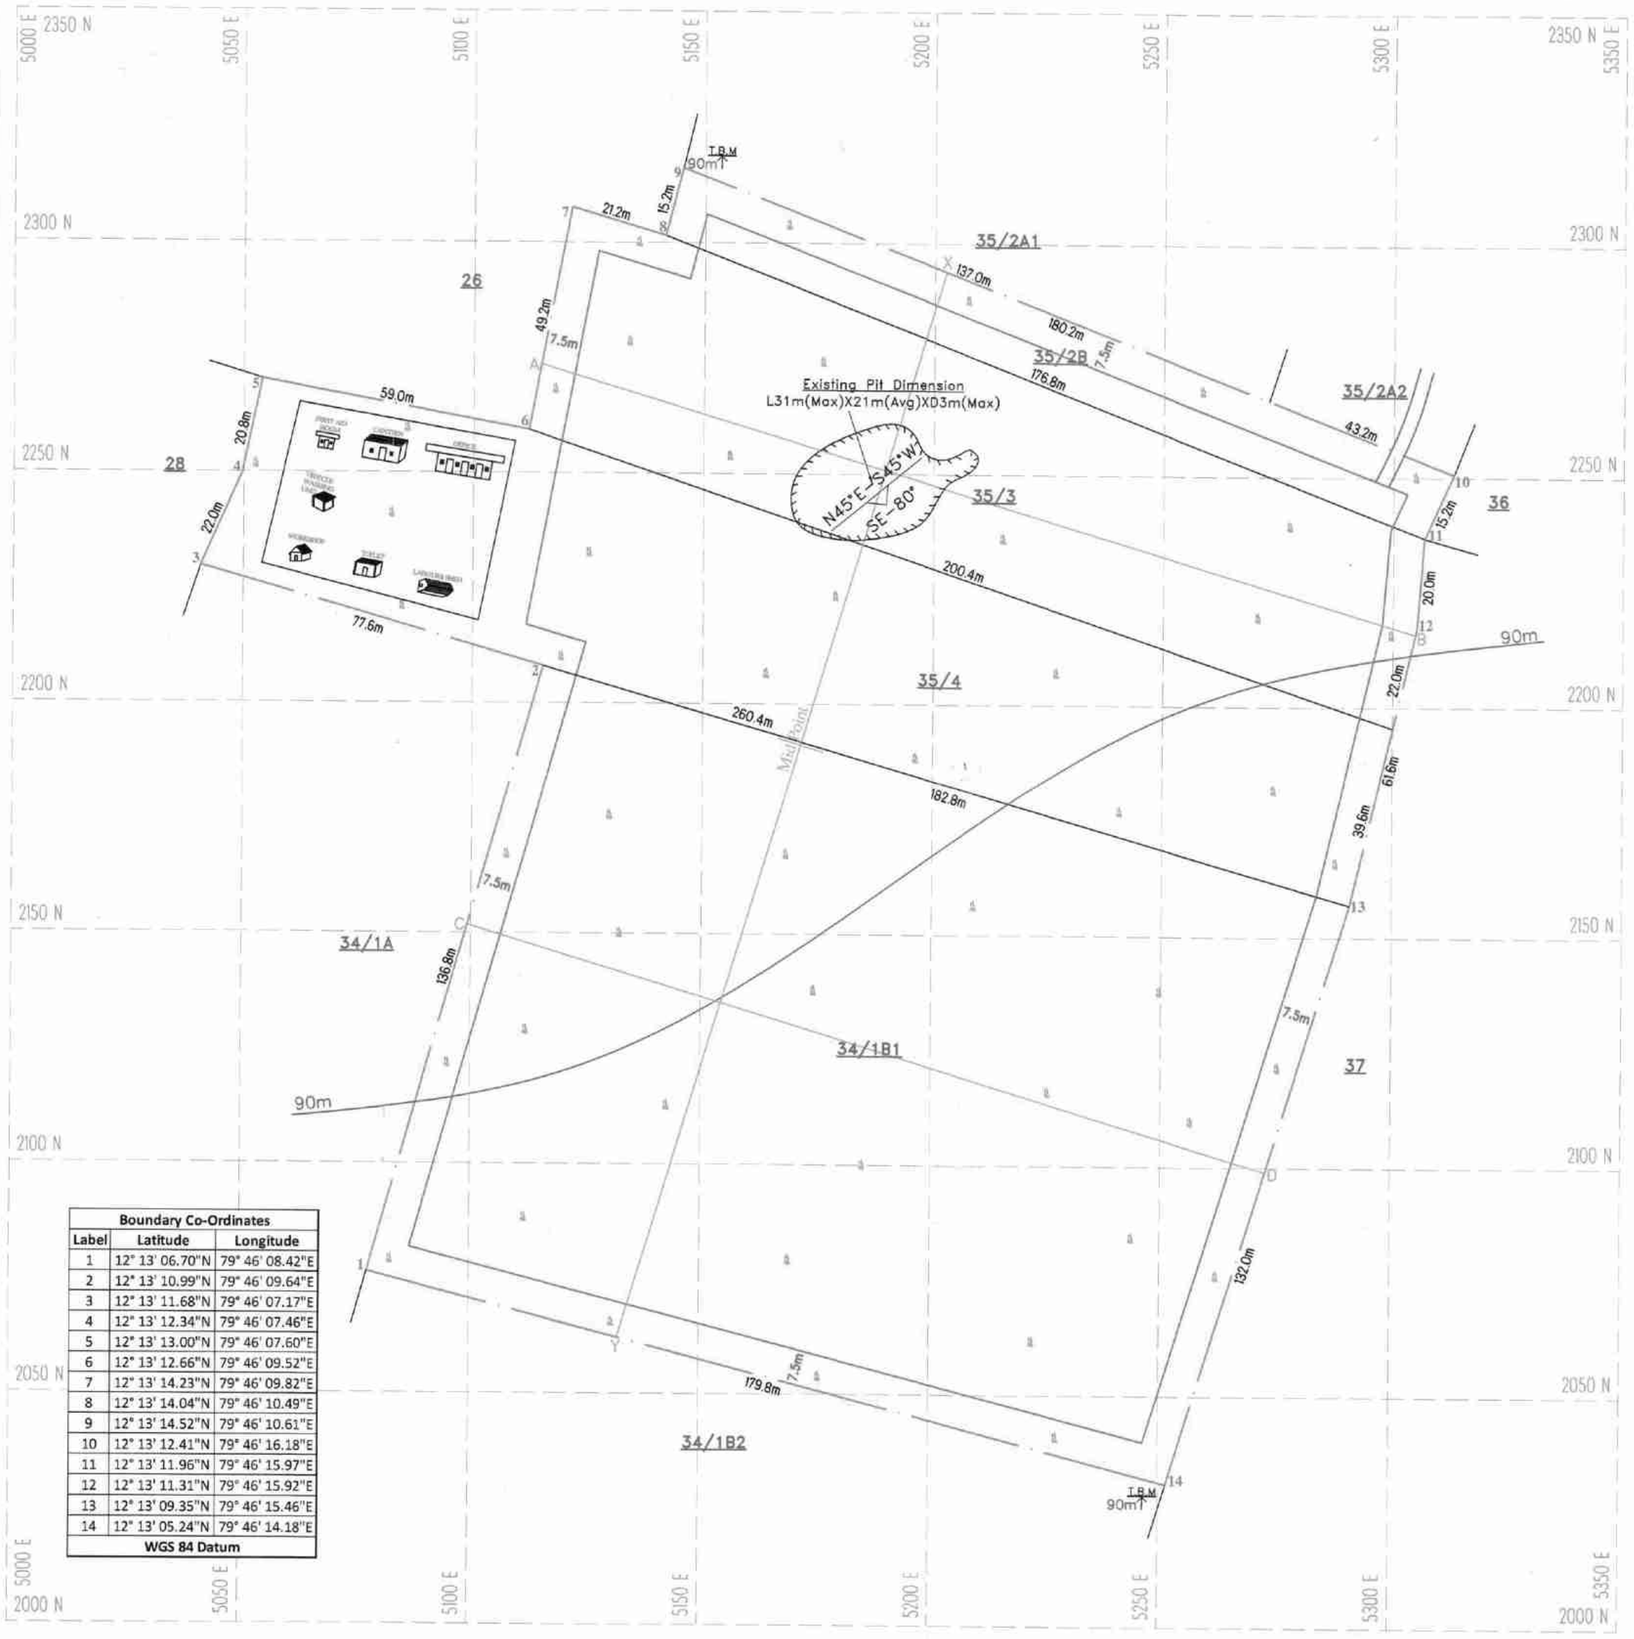

Boundary Co-Ordinates		
Label	Latitude	Longitude
1	12° 13' 06.70"N	79° 46' 08.42"E
2	12° 13' 10.99"N	79° 46' 09.64"E
3	12° 13' 11.68"N	79° 46' 07.17"E
4	12° 13' 12.34"N	79° 46' 07.46"E
5	12° 13' 13.00"N	79° 46' 07.60"E
6	12° 13' 12.66"N	79° 46' 09.52"E
7	12° 13' 14.23"N	79° 46' 09.82"E
8	12° 13' 14.04"N	79° 46' 10.49"E
9	12° 13' 14.52"N	79° 46' 10.61"E
10	12° 13' 12.41"N	79° 46' 16.18"E
11	12° 13' 11.96"N	79° 46' 15.97"E
12	12° 13' 11.31"N	79° 46' 15.92"E
13	12° 13' 09.35"N	79° 46' 15.46"E
14	12° 13' 05.24"N	79° 46' 14.18"E
WGS 84 Datum		

SECTION ALONG X-Y

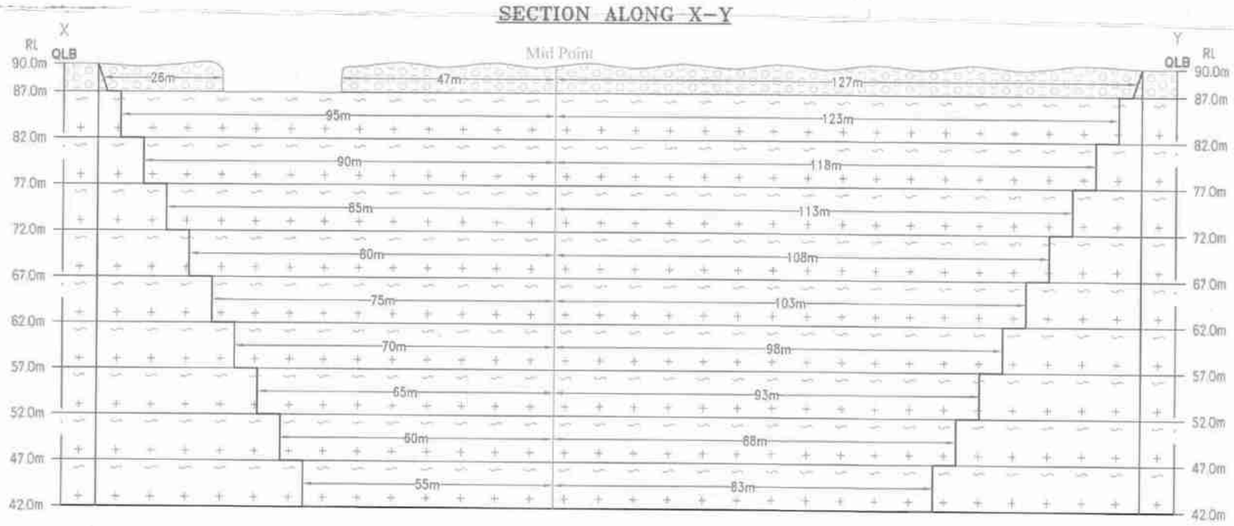

SECTION ALONG A-B

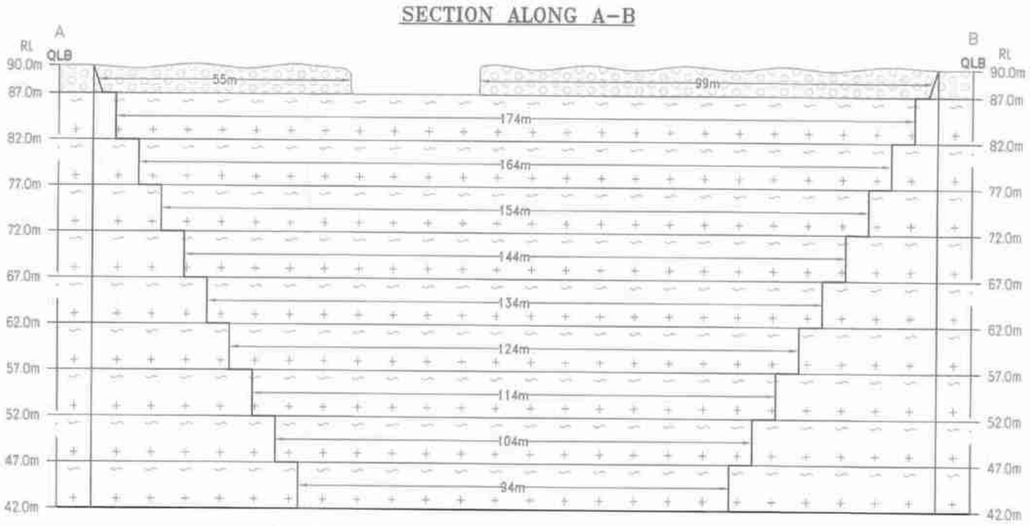

SECTION ALONG C-D

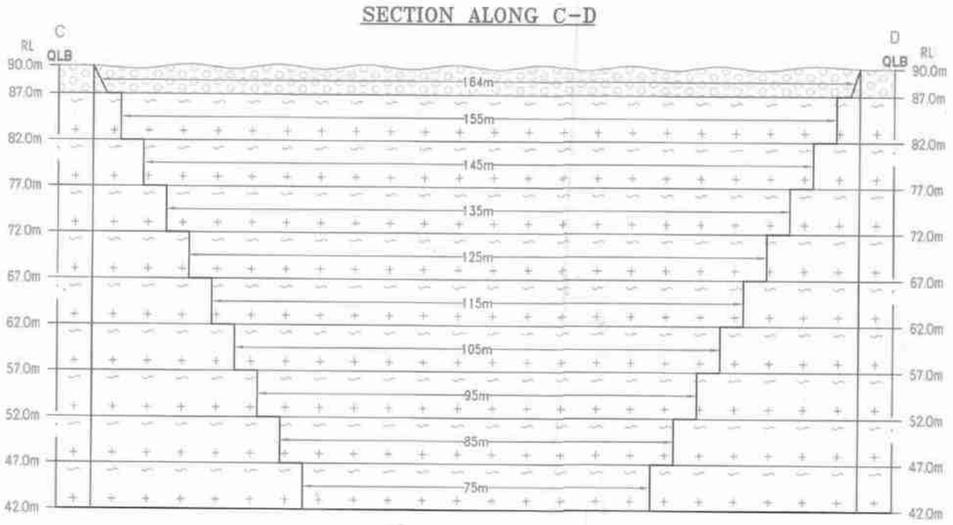

PLATE NO-III

DATE OF SURVEY : 03.02.2024

APPLICANT:

THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:

S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

- Q.LEASE APPLIED BOUNDARY
- 7.5m SAFETY DISTANCE
- TEMPORARY BENCH MARK (TBM)
- APPROACH ROAD
- CONTOUR
- SCRUB
- QUARRY PIT
- GRAVEL
- ROUGH STONE
- STRIKE & DIP

TOPOGRAPHY, GEOLOGICAL, MINEABLE PLAN & SECTIONS

SCALE 1 : 1000
SECTIONS HOR 1:1000, VER 1:500

PREPARED BY:

THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN,M.Sc.,M.Phil.,
QUALIFIED PERSON

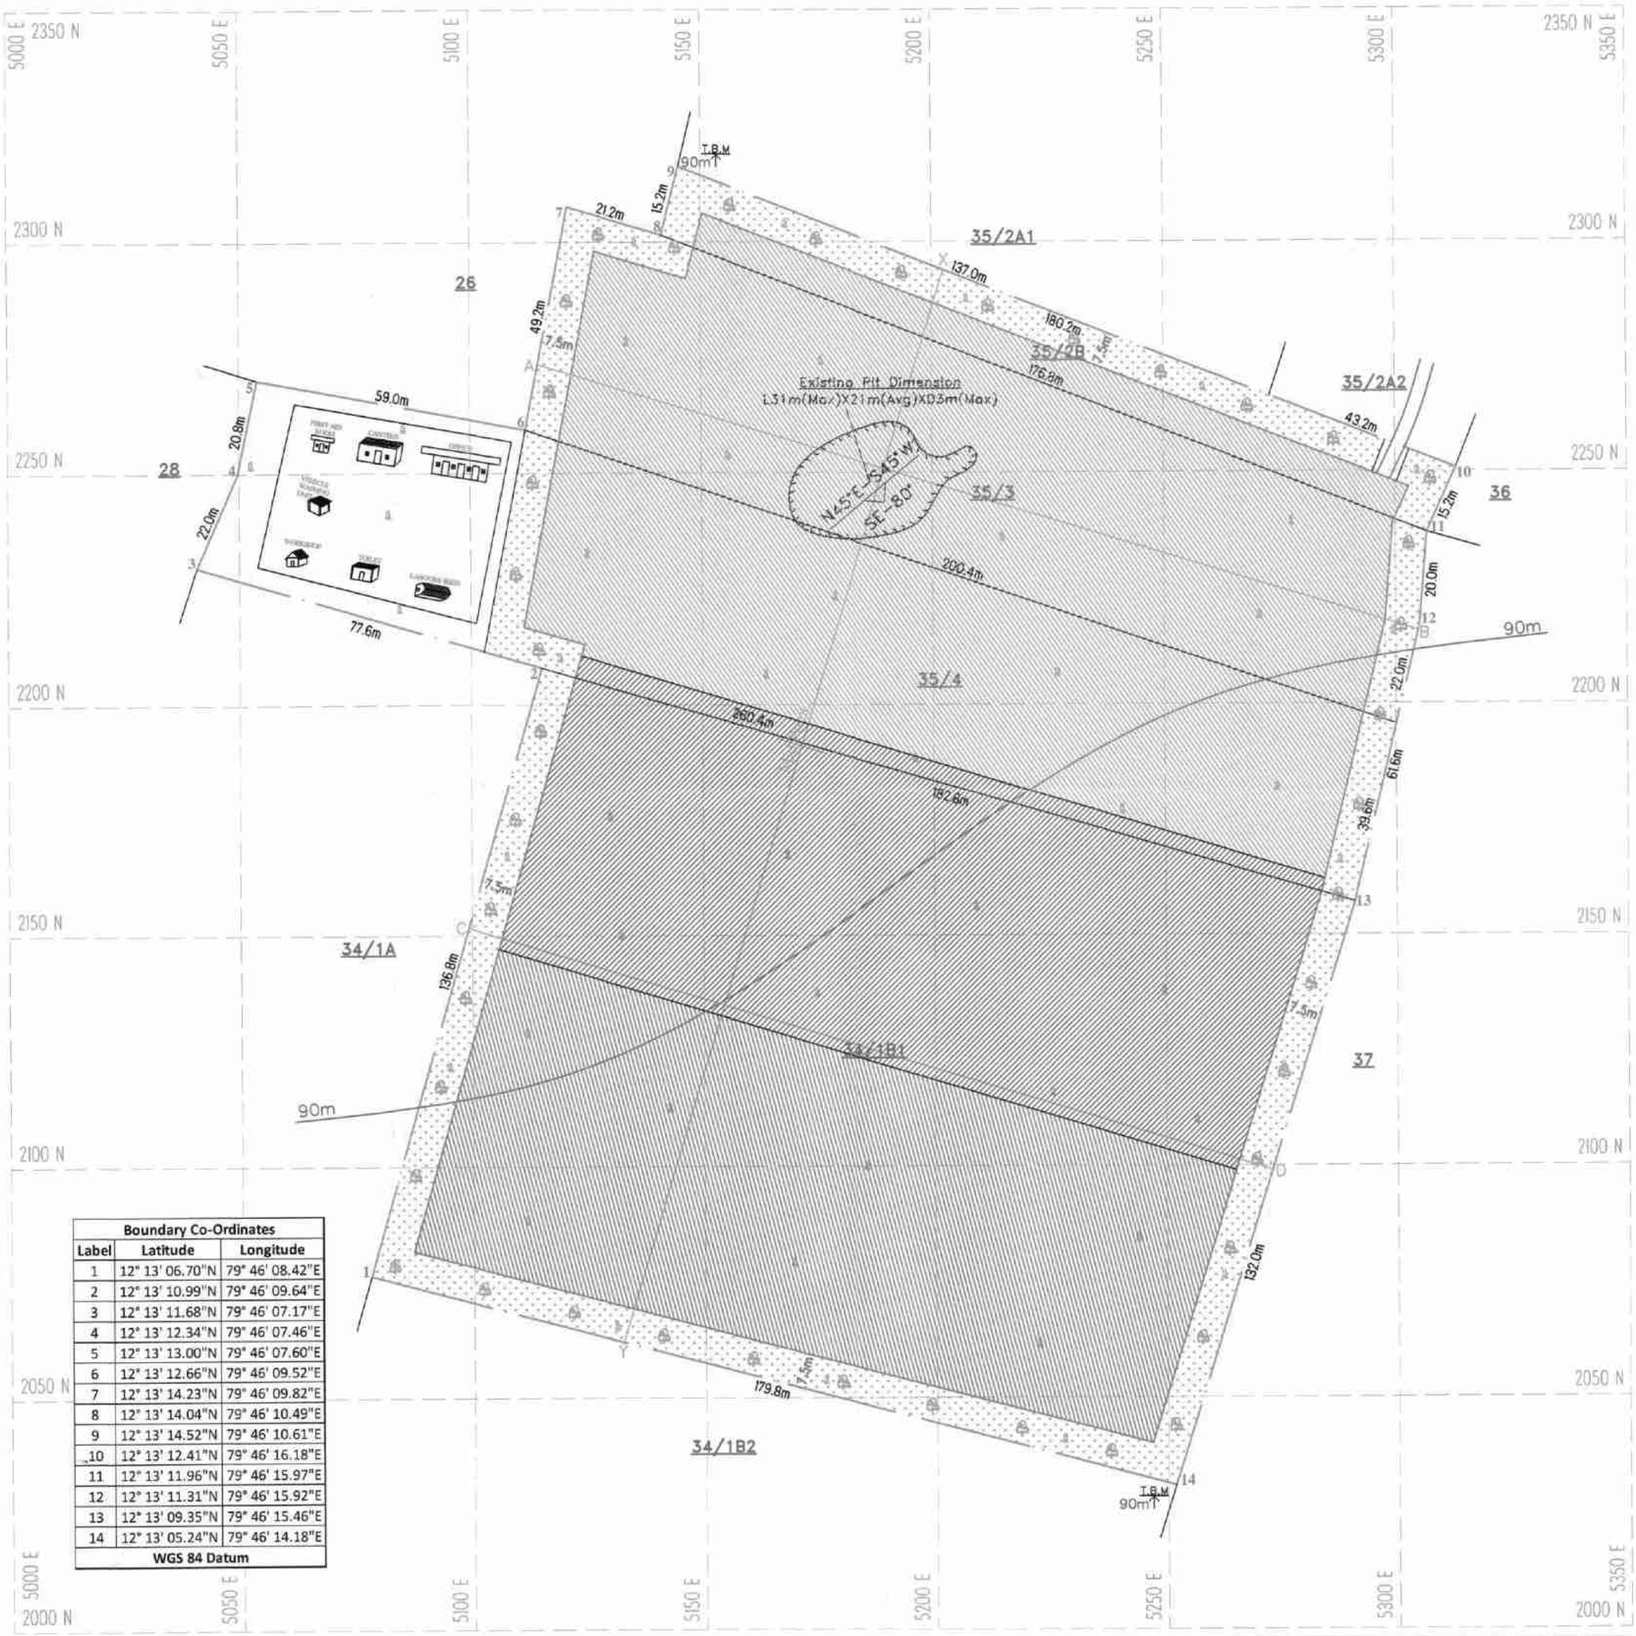

Boundary Co-Ordinates		
Label	Latitude	Longitude
1	12° 13' 06.70"N	79° 46' 08.42"E
2	12° 13' 10.99"N	79° 46' 09.64"E
3	12° 13' 11.68"N	79° 46' 07.17"E
4	12° 13' 12.34"N	79° 46' 07.46"E
5	12° 13' 13.00"N	79° 46' 07.60"E
6	12° 13' 12.66"N	79° 46' 09.52"E
7	12° 13' 14.23"N	79° 46' 09.82"E
8	12° 13' 14.04"N	79° 46' 10.49"E
9	12° 13' 14.52"N	79° 46' 10.61"E
10	12° 13' 12.41"N	79° 46' 16.18"E
11	12° 13' 11.96"N	79° 46' 15.97"E
12	12° 13' 11.31"N	79° 46' 15.92"E
13	12° 13' 09.35"N	79° 46' 15.46"E
14	12° 13' 05.24"N	79° 46' 14.18"E
WGS 84 Datum		

SECTION ALONG X-Y

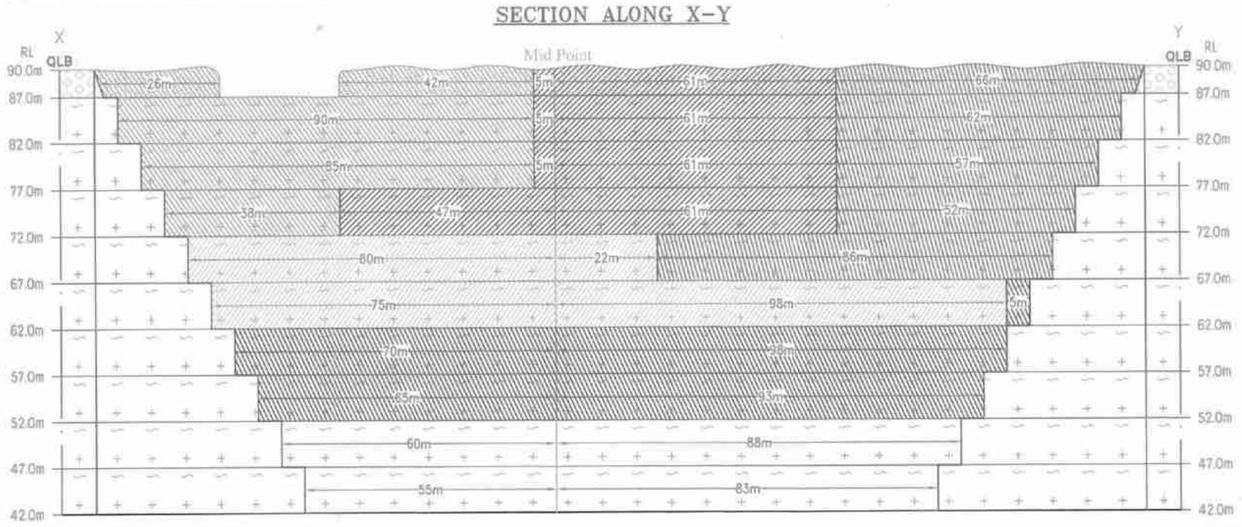

SECTION ALONG A-B

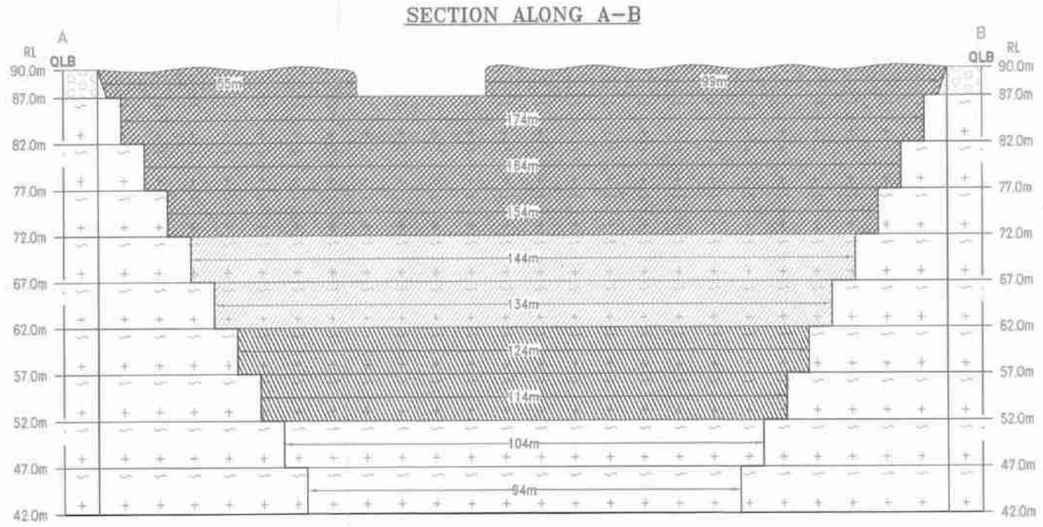

SECTION ALONG C-D

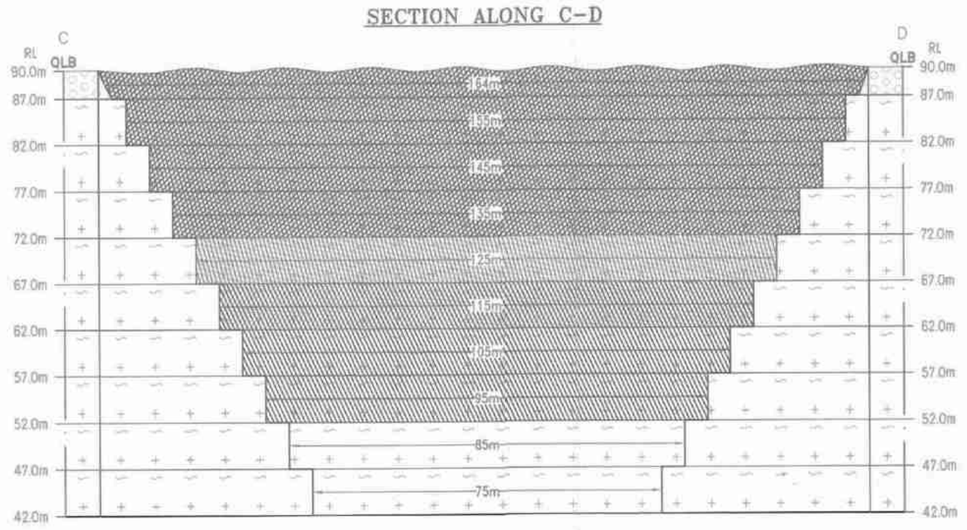

1st yr Proposed area to be Quarried
2nd yr Proposed area to be Quarried
3rd yr Proposed area to be Quarried
4th yr Proposed area to be Quarried
5th yr Proposed area to be Quarried

Proposed area to be Planted

- 6 MAR 2024

PLATE NO-IV
DATE OF SURVEY : 03.02.2024

APPLICANT:
THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:
S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

- Q.LEASE APPLIED BOUNDARY
- 7.5m SAFETY DISTANCE
- TEMPORARY BENCH MARK (T.B.M)
- APPROACH ROAD
- CONTOUR
- SCRUB
- QUARRY PIT
- GRAVEL
- ROUGH STONE
- STRIKE & DIP

YEARWISE DEVELOPMENT & PRODUCTION PLAN & SECTIONS

SCALE 1 : 1000
SECTIONS HOR 1:1000, VER 1:500

PREPARED BY:
THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN.M.Sc.,M.Phil.,
QUALIFIED PERSON

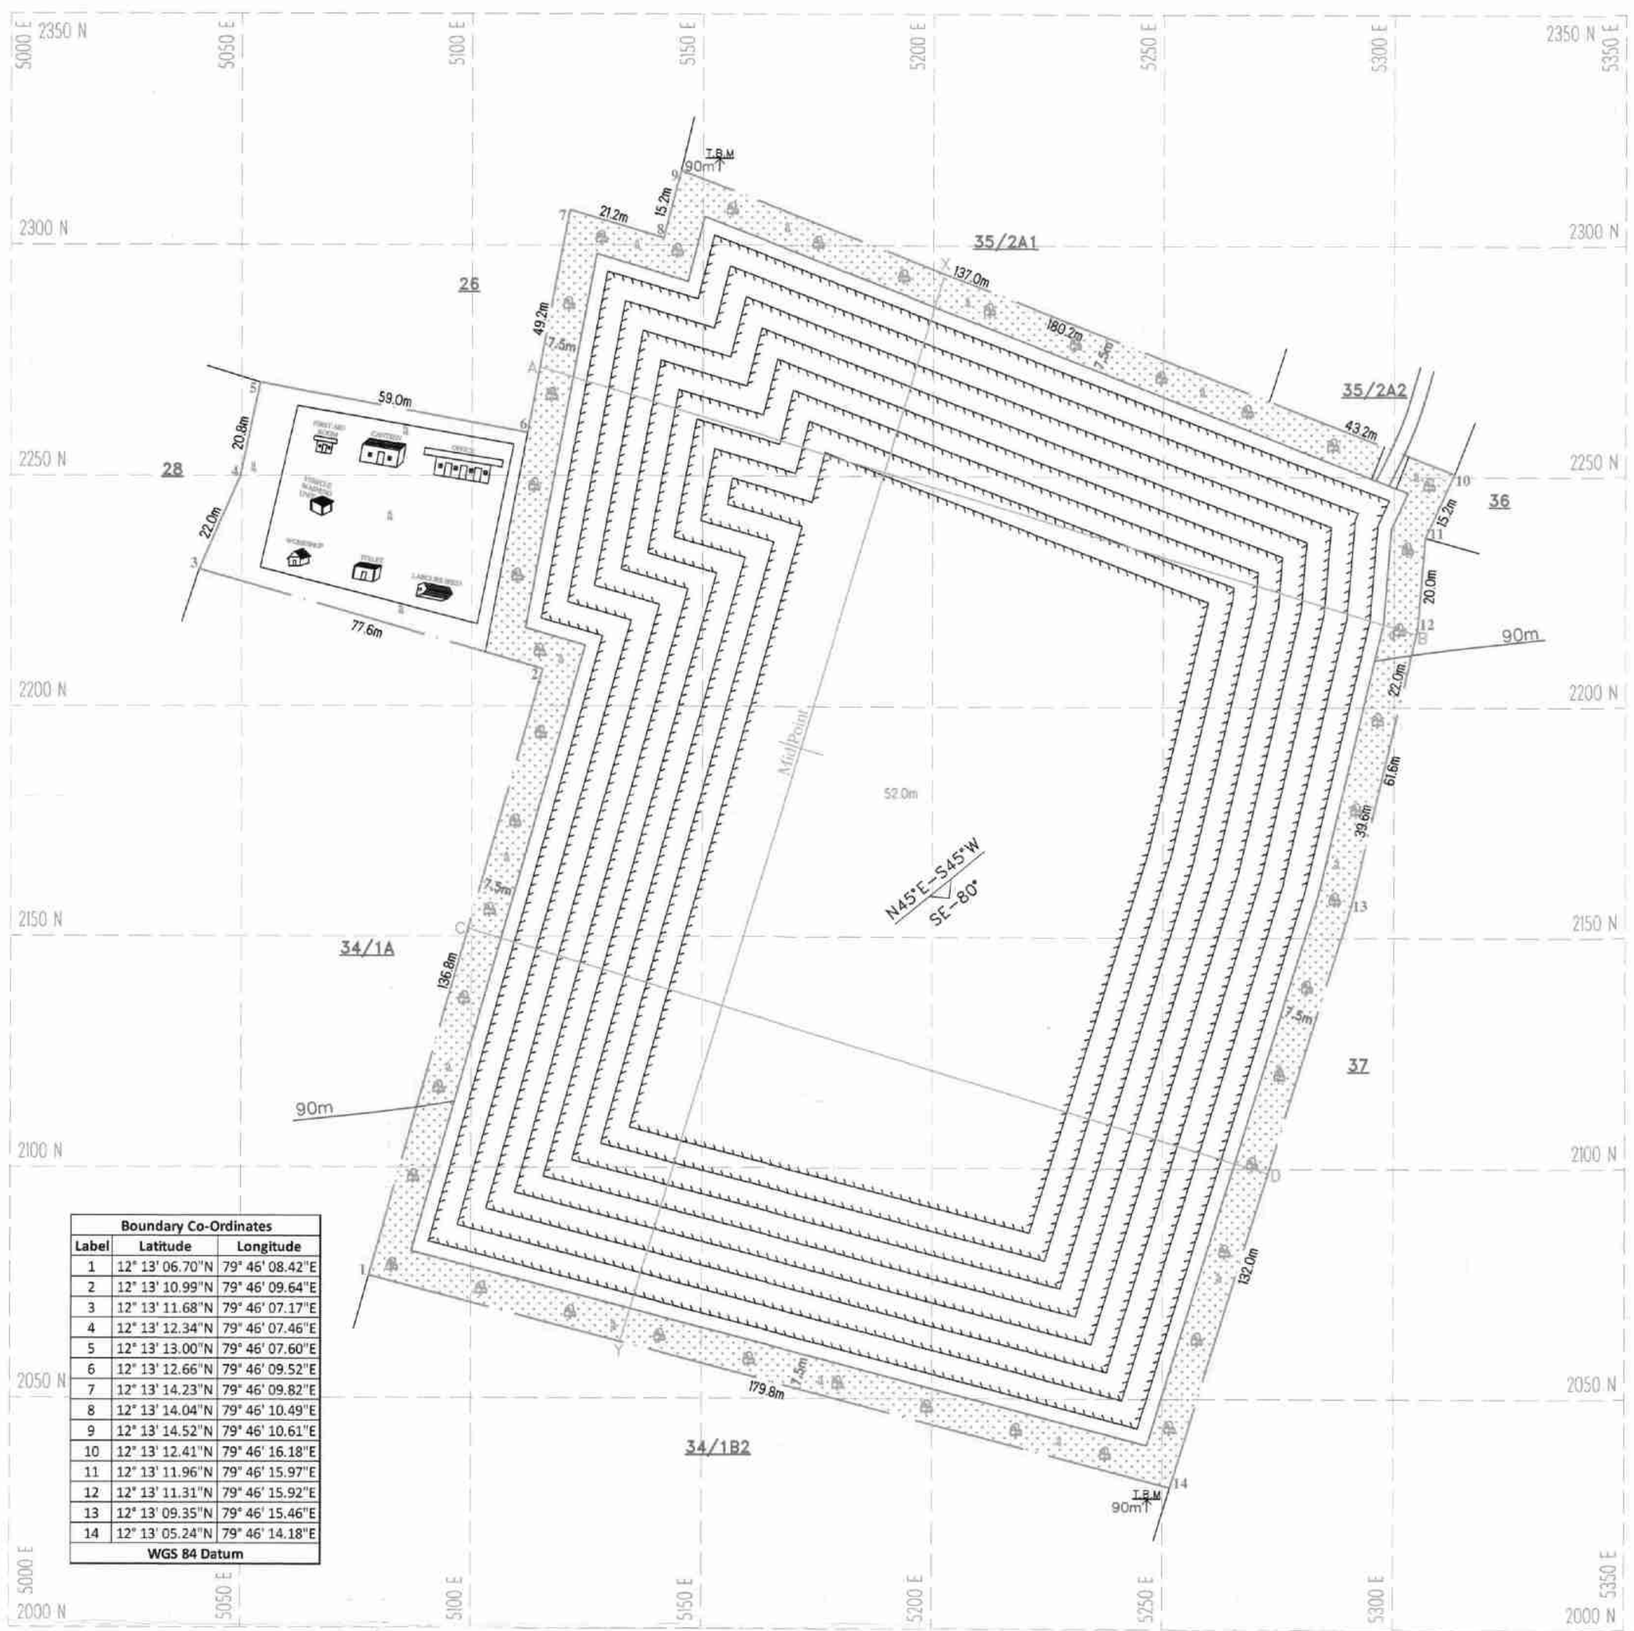

- 6 MAR 2024

Boundary Co-Ordinates		
Label	Latitude	Longitude
1	12° 13' 06.70"N	79° 46' 08.42"E
2	12° 13' 10.99"N	79° 46' 09.64"E
3	12° 13' 11.68"N	79° 46' 07.17"E
4	12° 13' 12.34"N	79° 46' 07.46"E
5	12° 13' 13.00"N	79° 46' 07.60"E
6	12° 13' 12.66"N	79° 46' 09.52"E
7	12° 13' 14.23"N	79° 46' 09.82"E
8	12° 13' 14.04"N	79° 46' 10.49"E
9	12° 13' 14.52"N	79° 46' 10.61"E
10	12° 13' 12.41"N	79° 46' 16.18"E
11	12° 13' 11.96"N	79° 46' 15.97"E
12	12° 13' 11.31"N	79° 46' 15.92"E
13	12° 13' 09.35"N	79° 46' 15.46"E
14	12° 13' 05.24"N	79° 46' 14.18"E
WGS 84 Datum		

SECTION ALONG X-Y

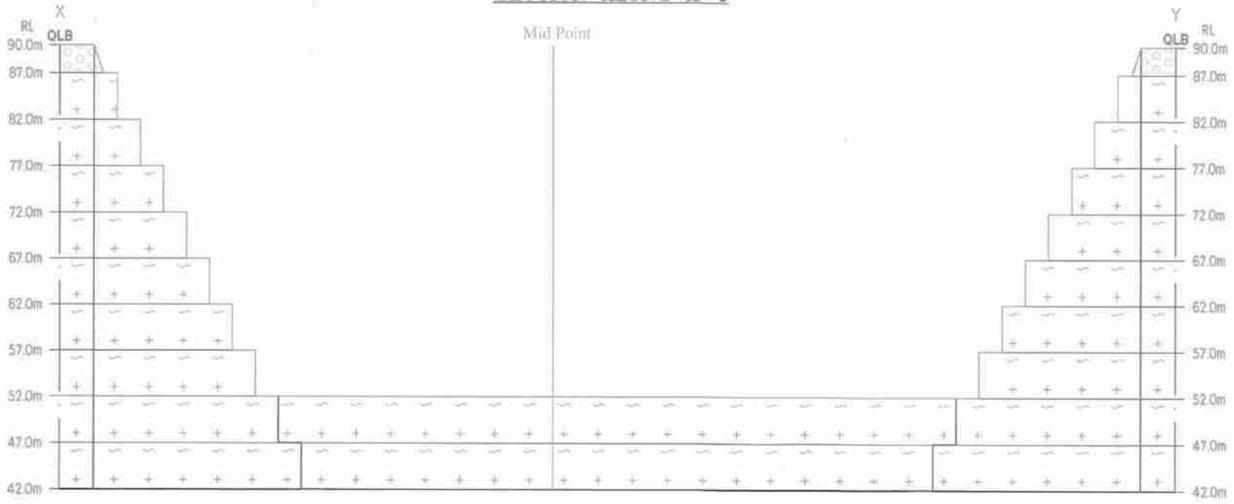

SECTION ALONG A-B

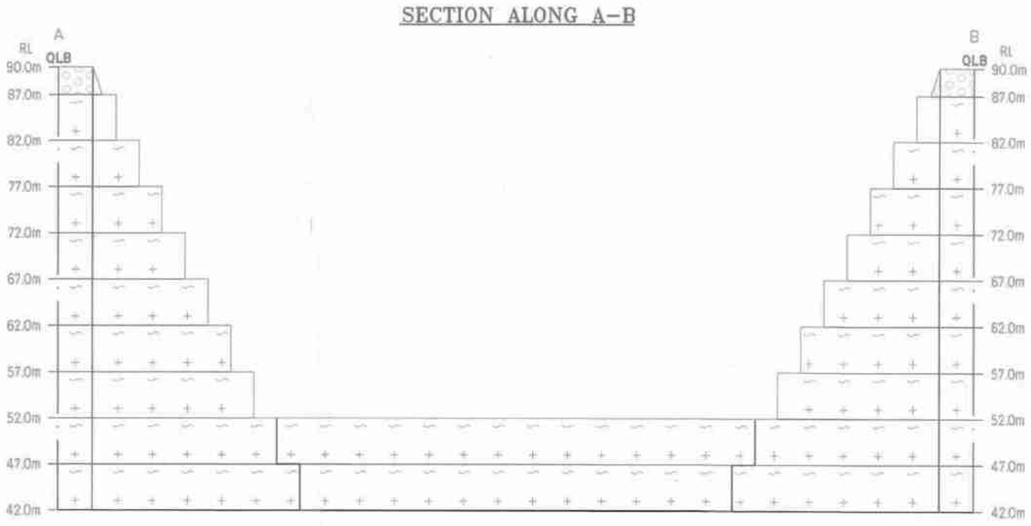

SECTION ALONG C-D

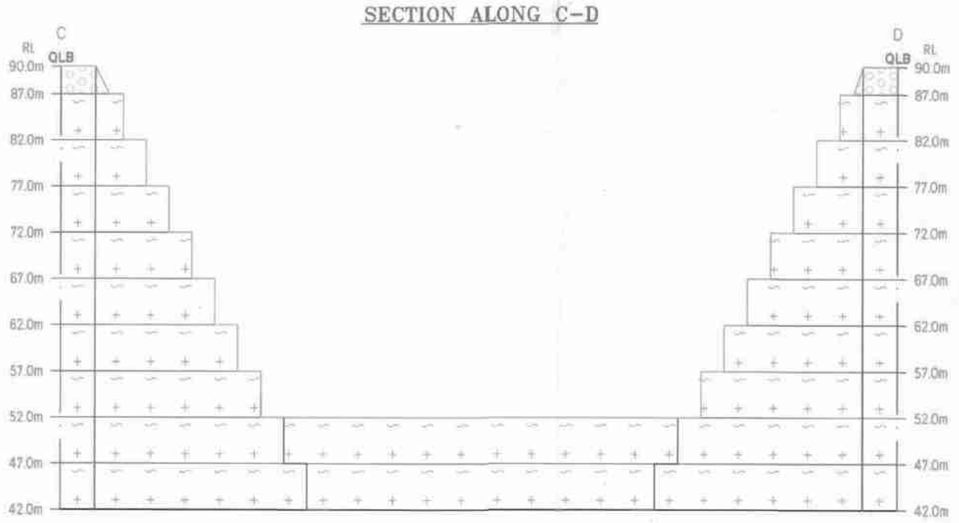

PRESENT & POST LAND USE PATTERN

DESCRIPTION	PRESENT AREA (Ha)	AREA AT THE END OF THIS QUARRYING PERIOD (Ha)
AREA UNDER QUARRYING	0.06.50	3.86.00
INFRASTRUCTURE	Nil	0.02.00
ROADS	Nil	0.01.00
GREEN BELT	Nil	0.86.00
UN-UTILIZED AREA	4.68.50	Nil
GRAND TOTAL	4.75.00	4.75.00

Ultimate Pit Dimension of End of the Mining Plan Period
L227m(Max)X170(Avg)mXD38m(Max)

Proposed area to be Planted

PLATE NO-V
DATE OF SURVEY : 03.02.2024

APPLICANT:
THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:
S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

- Q.LEASE APPLIED BOUNDARY
- 7.5m SAFETY DISTANCE
- TEMPORARY BENCH MARK (T.B.M)
- APPROACH ROAD
- CONTOUR
- SCRUB
- PROPOSED QUARRY PIT
- GRAVEL
- ROUGH STONE
- STRIKE & DIP

PROGRESSIVE QUARRY CLOSER PLAN & SECTIONS
SCALE 1 : 1000
SECTIONS HOR 1:1000, VER 1:500

PREPARED BY:
THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN, M.Sc.,M.Phil.,
QUALIFIED PERSON

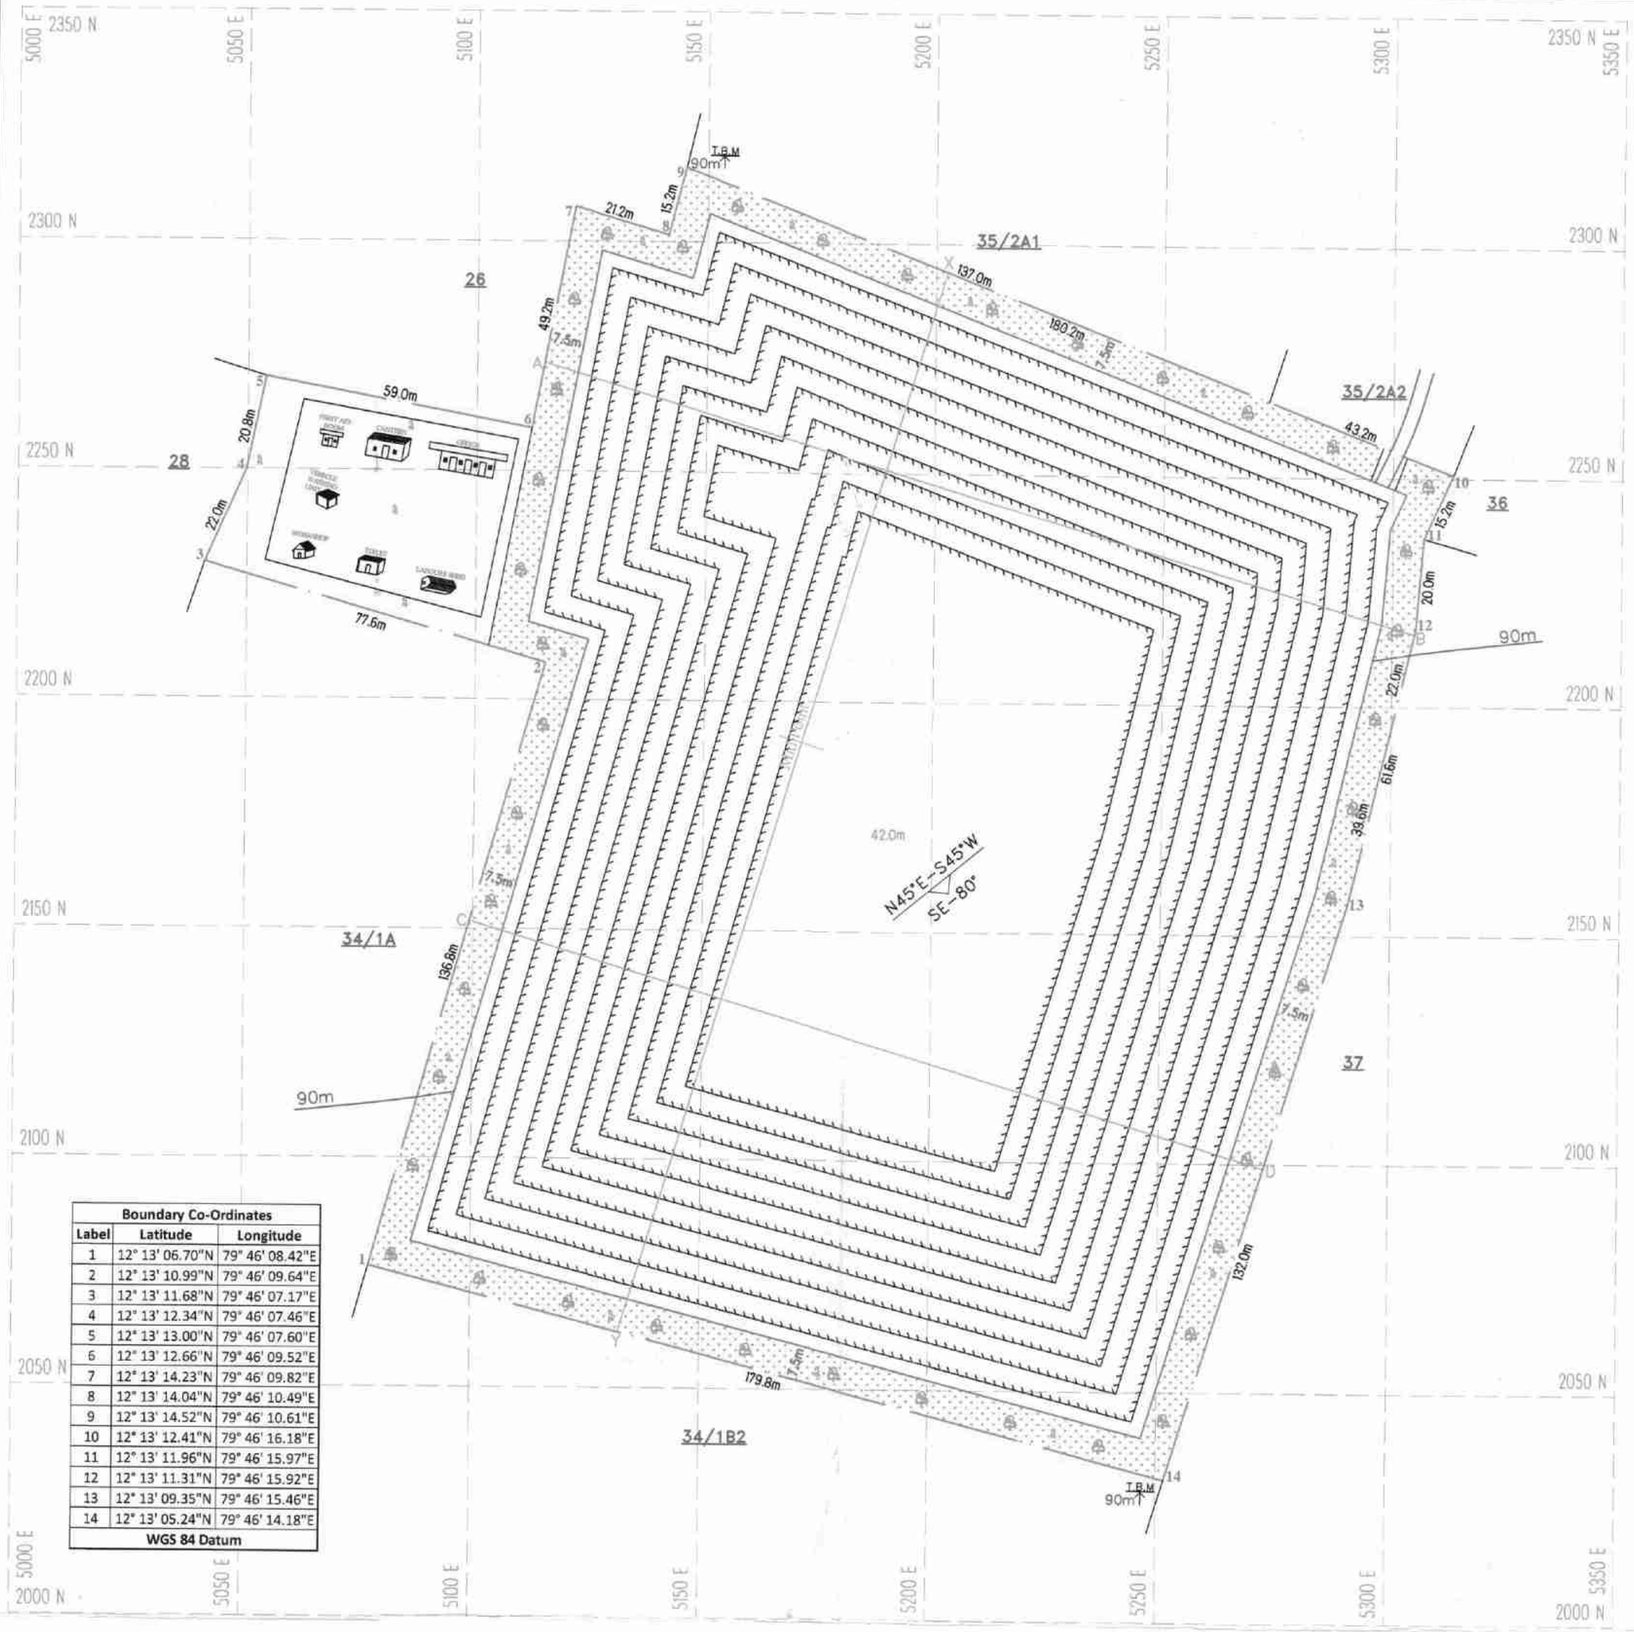

Boundary Co-Ordinates		
Label	Latitude	Longitude
1	12° 13' 06.70"N	79° 46' 08.42"E
2	12° 13' 10.99"N	79° 46' 09.64"E
3	12° 13' 11.68"N	79° 46' 07.17"E
4	12° 13' 12.34"N	79° 46' 07.46"E
5	12° 13' 13.00"N	79° 46' 07.60"E
6	12° 13' 12.66"N	79° 46' 09.52"E
7	12° 13' 14.23"N	79° 46' 09.82"E
8	12° 13' 14.04"N	79° 46' 10.49"E
9	12° 13' 14.52"N	79° 46' 10.61"E
10	12° 13' 12.41"N	79° 46' 16.18"E
11	12° 13' 11.96"N	79° 46' 15.97"E
12	12° 13' 11.31"N	79° 46' 15.92"E
13	12° 13' 09.35"N	79° 46' 15.46"E
14	12° 13' 05.24"N	79° 46' 14.18"E
WGS 84 Datum		

SECTION ALONG X-Y

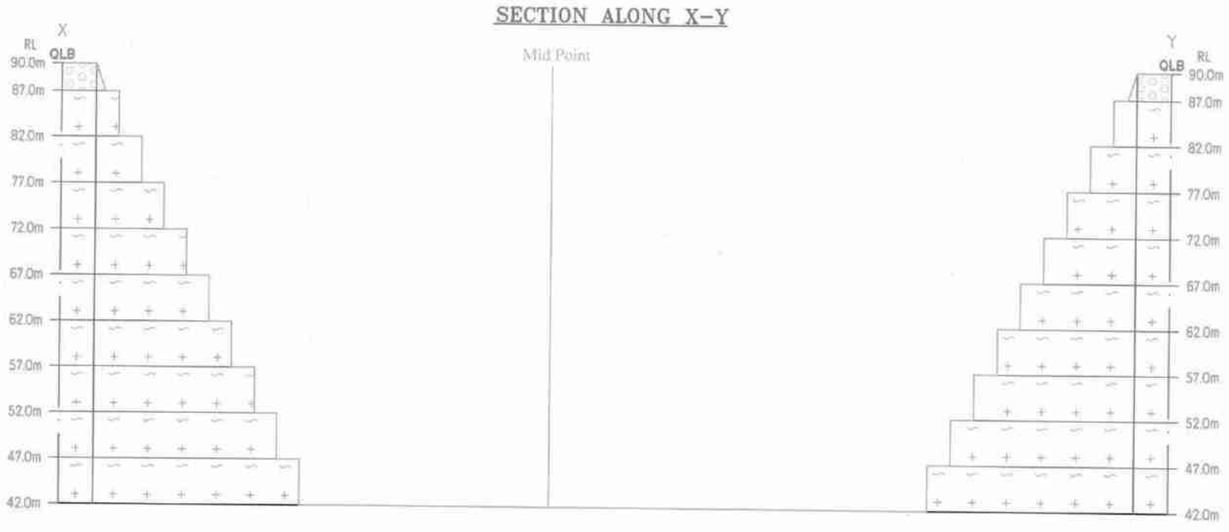

SECTION ALONG A-B

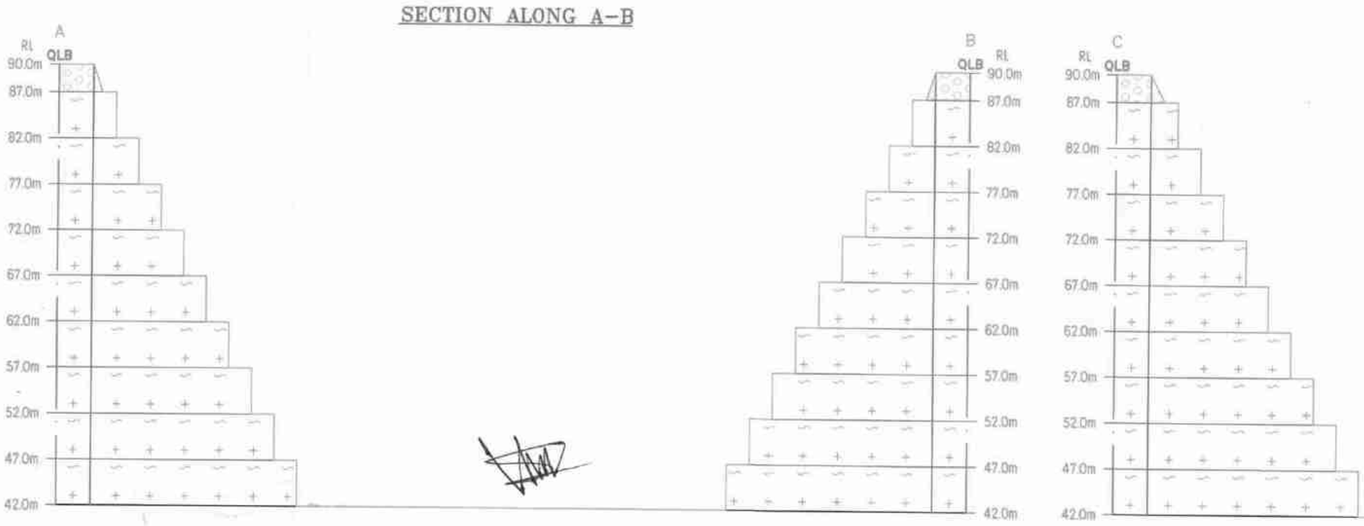

SECTION ALONG C-D

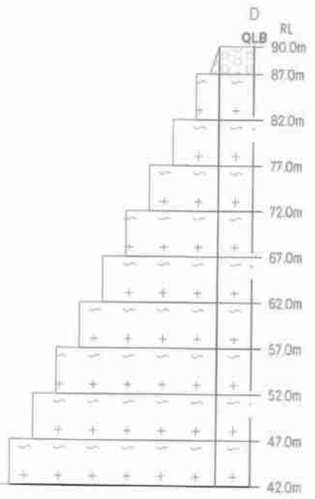

Ultimate Pit Dimension of End of the Life of Quarry Lease Period
L227m(Max)X170(Avg)mXD48m(Max)

Proposed area to be Planted

PLATE NO-VI
DATE OF SURVEY : 03.02.2024

APPLICANT:
THIRU.V.NAGARAJAN,
S/o.VARADHARAJ GOUNDER,
NO.65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:
S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Ha,
VILLAGE : NALMUKKAL,
TALUK : MARAKKANAM,
DISTRICT : VILUPPURAM.

INDEX

- Q.LEASE APPLIED BOUNDARY
- 7.5m SAFETY DISTANCE
- TEMPORARY BENCH MARK (T.B.M)
- APPROACH ROAD
- CONTOUR
- SCRUB
- PROPOSED QUARRY PIT
- GRAVEL
- ROUGH STONE
- STRIKE & DIP

CONCEPTUAL PLAN & SECTIONS
SCALE 1 : 1000
SECTIONS HOR 1:1000, VER 1:500

PREPARED BY:
THIS IS TO CERTIFY THAT THE INFORMATION IN THIS PLATE IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE BASED UPON THE LEASE MAP AUTHENTICATED BY STATE GOVERNMENT

C.NATARAJAN,M.Sc,M.Phil.,305
QUALIFIED PERSON

இணைப்பு-4

From
Tmt. S.Safiya, M.Sc.,
Assistant Director,
Geology and Mining,
Viluppuram.

To
Thiru.V.Nagarajan,
S/o.Varadaraj Gounder,
No.65, Marakkanam Road,
Perumukkal Village,
Marakkanam Taluk,
Viluppuram District.

Rc.No.B/G&M/96/2021 Dated 06.03.2024

Sub: Mines & Minerals – Minor Mineral – Rough stone and Gravel - Viluppuram District – Marakkanam Taluk – Nalmukkal Village - over an extent of 4.75.00 hectares of patta lands – S.F.Nos. 34/1B1 - 2.43.0, 35/2B - 0.28.0, 35/3 - 0.88.0 and 35/4 - 1.16.0 – Quarry lease application preferred by Thiru.V.Nagarajan, Perumukkal Village – Precise area communicated - Details of quarries situated within 500 meter radial distance – furnished - reg.

Ref : 1. Assistant Director, Geology and Mining, Viluppuram Letter Rc.No. B/G&M/96/2021 Dated 02.02.2024.

2. Representation from Thiru.V.Nagarajan, Perumukkal Village Dated 04.03.2024.

****

With reference to your letter in the reference 2nd cited, the details of existing, proposed and abandoned quarries located within 500 mts. radial distance from the periphery of the proposed Rough stone and Gravel quarry over an extent of 4.75.00 hectares of patta lands in S.F.Nos.34/1B1 - 2.43.0, 35/2B - 0.28.0, 35/3 - 0.88.0 and 35/4 -1.16.0 of Nalmukkal Village, Marakkanam Taluk, Villupuram District are as follows.

1. Existing quarries:

Sl. No.	Name of the lessee / permit holder	Name of the Mineral	Taluk & Village	S.F. Nos.	Extent (in hects)	Lease period	Remarks
1.	N.Gopinath, S/o.Natarajan, No.19, Nattamaikarar Street, Polambakkam Village, Cheyyur Village, Kanchipuram District.	Rough stone & Gravel	Marakkanam, Nalmukkal	33/5 37/3 37/4 37/5 37/6 37/7	0.54.5 1.14.0 0.68.5 0.40.0 0.31.0 0.27.0 **3.35.0**	21.03.2022 to 20.03.2027	

2.	D.Durai, S/o.Dhanapal Gounder, Keelarungunam Village, Perumukkal Post, Marakkanam Taluk, Viluppuram District.	Rough stone & Gravel	Marakkanam Nalmukkal	27/6 27/7 27/8	0.40.5 0.39.0 0.40.5 **1.20.0**	06.12.2022 to 05.12.2027	-
3.	V.Ravichandiran, S/o.Varatharaj Gounder, No.63/19, Perumukkal Village and Post, Marakkanam Taluk, Viluppuram District	Rough stone & Gravel	Marakkanam Nalmukkal	26/1B1 27/3A 27/3B	0.77.0 0.14.5 0.43.5 **1.35.0**	29.12.2022 to 28.12.2027	-

II. Proposed Area :

Sl. No.	Name of the lessee / permit holder	Name of the Mineral	Taluk & Village	S.F. Nos.	Extent (in hects)	Remarks
1.	Thiru.V.Nagarajan, S/o.Varadaraj Gounder, No.65, Marakkanam Road, Perumukkal Village, Marakkanam Taluk, Viluppuram District.	Rough stone & Gravel	Marakkanam, Nalmukkal	34/1B1 35/2B 35/3 35/4	2.43.0 0.28.0 0.88.0 1.16.0 **4.75.0**	-

III. Abandoned quarries :

Sl. No.	Name of the lessee / permit holder	Name of the Mineral	Taluk & Village	S.F. Nos.	Extent (in hects)	Lease period	Remarks
NIL							

06/03/2024

Assistant Director,
Geology and Mining,
Viluppuram.

6/3/24

இணைப்பு-5

சான்று

விழுப்புரம் மாவட்டம் முகையூர் வட்டம் 08 நல்லூர் கிராமம் புல எண் : 34/1B1 . 2.43.0 ஏர்ஸ் 35/2B 0.28.0 ஏர்ஸ் 35/3 0.88.0 ஏர்ஸ் 35/4 1.16.0 ஏர்ஸ் ஆக மொத்த பரப்பு 4.75.0 ஹெக்டேர் பரப்பளவு நிலத்தில் உள்ளமையாளர் திரு. வ. நாகராஜன் தலை வராதராஜ்கிருஷ்ணன் என்பவர் சாதாரண கல் மற்றும் கிராவல் வெட்டி எடுக்க நிலத்தை உரிமம் கோரி விண்ணப்பித்துள்ளார் மேற்படி நிலத்தில் கிராம புல எண்களில் 300 மீட்டர் சுற்றளவில் அங்கீகரிக்கப்பட்ட ஏதேனும் குடியிருப்புகள் அரசு பொதுக்கட்டிடங்கள் குடிநீர்க்கிணறுகள் மருத்துவமனைகள் பள்ளிகள் கல்லூரிகள் பாலங்கள் நீர்நிலைகள் சரணாலயம் மற்றும் வேறெந்த சரணாலயமும் ஏதும் இல்லை என்பதை தெரிவித்துக் கொள்கிறேன்.

08/04/2024

கிராம நிர்வாக அலுவலர்
கீழ்அருங்குணம் (முழு) கிராமம்
முகையூர் வட்டம்,
விழுப்புரம் மாவட்டம்

இணைப்பு-6

ANNEXURE 11

மாவட்டம் / District திருச்சி மாவட்டம்

எண். / No. 16

கிராமம் / Village

பெயர் / Name

தாலுக்கா / Taluk திருச்சி மேற்கு

புல எண். / Field No. 34

பரப்பு / Area : ஹெக்டேர் / ha 6 ஏர் / Area ச.மீ.

6 MAR 2014

நடவடிக்கை 34/131, 132 A/S per TK.SA/ 20/1421 DT: 6.2.2014

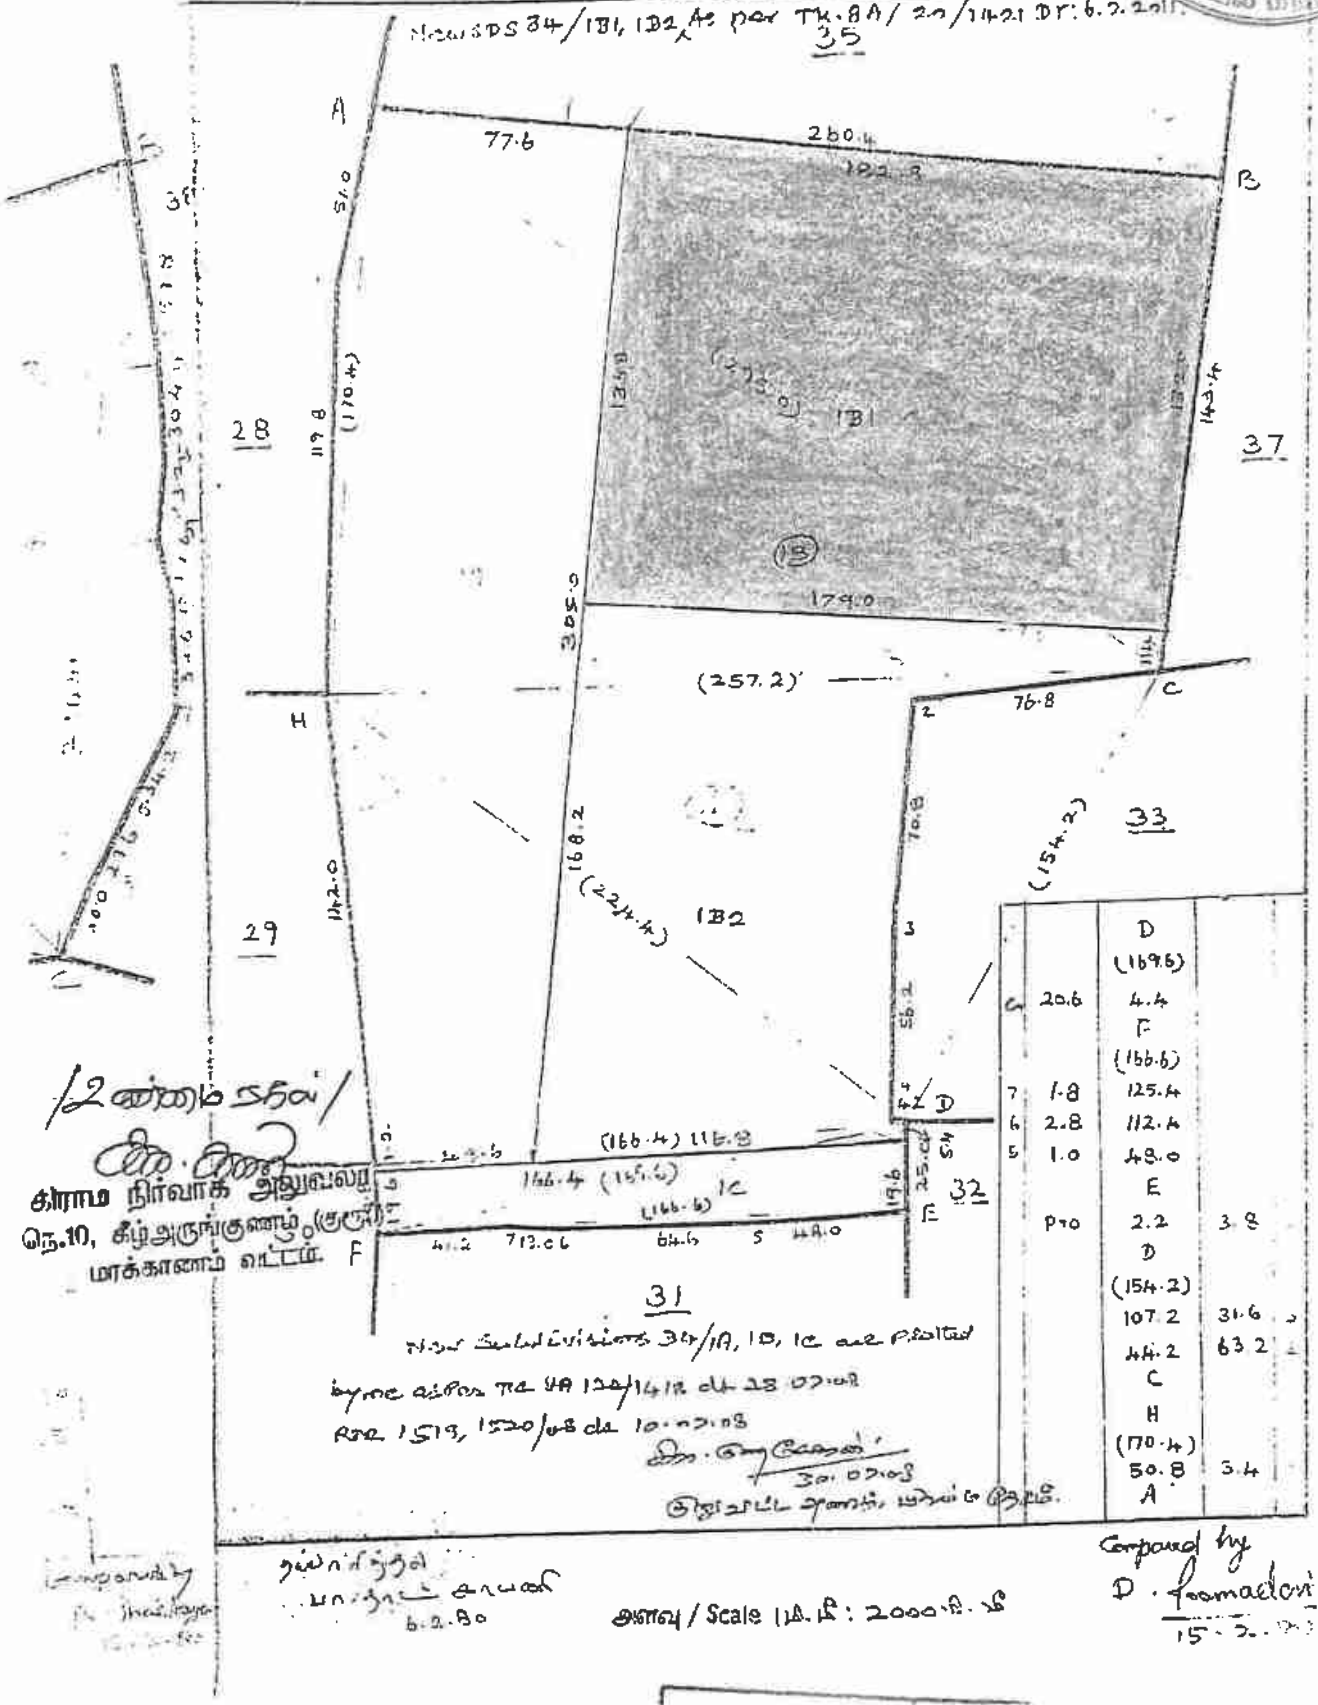

/2ம்மை சதம்/

கிராம நிர்வாக அலுவலர்

எண்.10, கீழ்அருங்குணம்(குரும்)

மாக்காணம் வட்டம்.

நடவடிக்கை 34/1A, 1B, 1C வரை பிரிவில்

layout வரை TK SA 124/1418 dt 28.02.08

RSR 1513, 1520/08 dt 10.12.08

30.07.08

சிறுசாட்டை அளவில் மேல் ஒத்தமை.

நல்லாசிரியர்

பகுதி நில அளவர்

6.2.80

அளவு / Scale 1 செ.மீ : 2000 செ.மீ

Compared by

D. Ramadoss

15.2.[illegible]

LEASE APPLIED AREA

தென் மேற்காக

திணைவரை

வ.எண். / Field No. 35 பரப்பு / Area : ஹெக்டேர் / ha ... ஏர் / Ares 80.5

16 MAR 2024

ப.எ: 167. இணைப்பாக்கம்

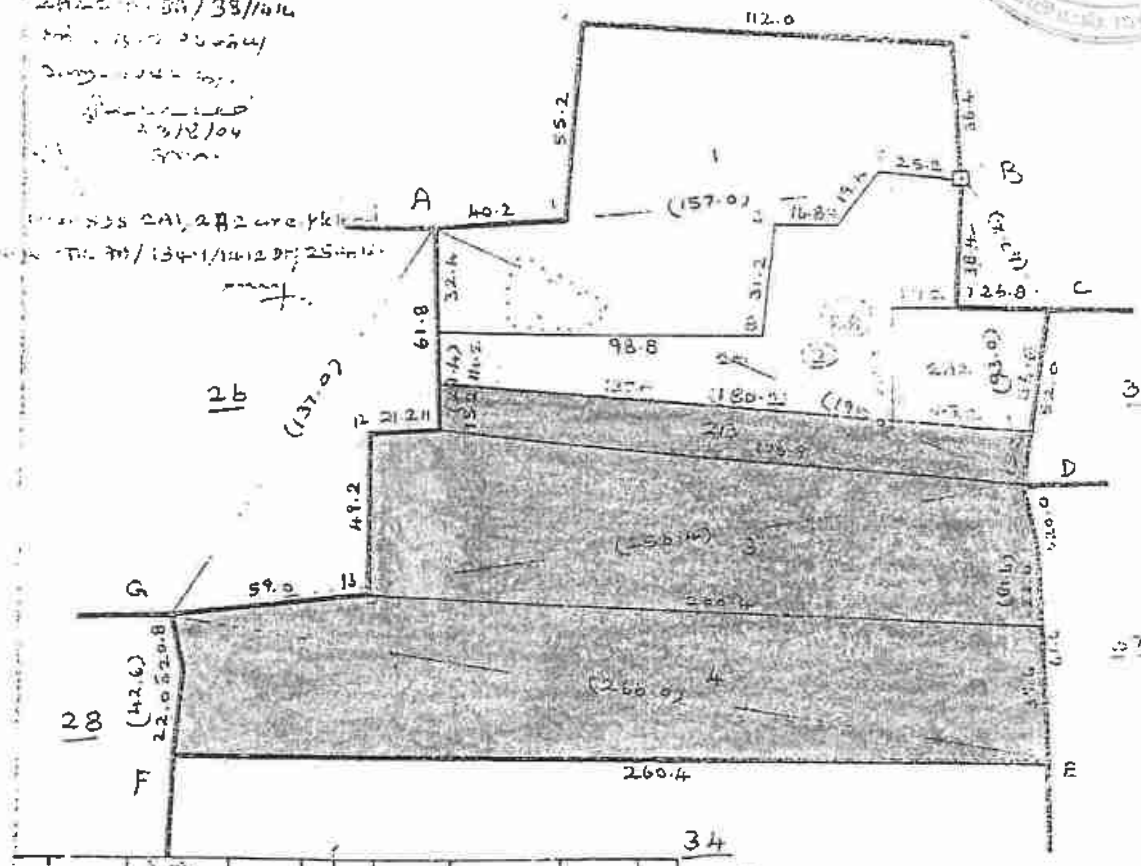

	10.0	152.2					G						
		90.6	11.0	8			(137.0)						
		D			13	46.6	99.8						
		(96.6)			12	17.4	61.2						
	17.4	44.0			11	35.6	50.4						
		B					A						
		C					G						
		(47.2)					(42.6)						
		31.8	22.0	7			21.8	2.2	10				
		F					F						
			pro				D						
							(81.6)						
							61.8	2.0	9				
	3.8	130.4					E						
		119.6	10.8	4			A						
		103.0	8.8	3			(195.0)						
	53.4	49.2			dk	21.0	174.6			F	42.2	260.4	
		40.2	1.0	1			167.6	Line	dk				
		A					157.0	Line	dk				

							A						
							(195.0)						
							58.4	74.0	15				
							D						
							G						
							(266.0)						
							22.0	78.4	D				
							E						

உண்மைநகல்

நில அளவை

மாவட்ட நிர்வாக அலுவலர்

கீழ்அருங்குணம் (கிராமம்)

பரக்காணம் வட்டம்(157.0)

தயாரித்தல்

ப.ராஜேந்திரன்

6.2.80

அளவு / Scale 1 மி.மீ : 2000 மி.மீ

Compared by

D. Kumadevi

15.2.

LEASE APPLIED AREA

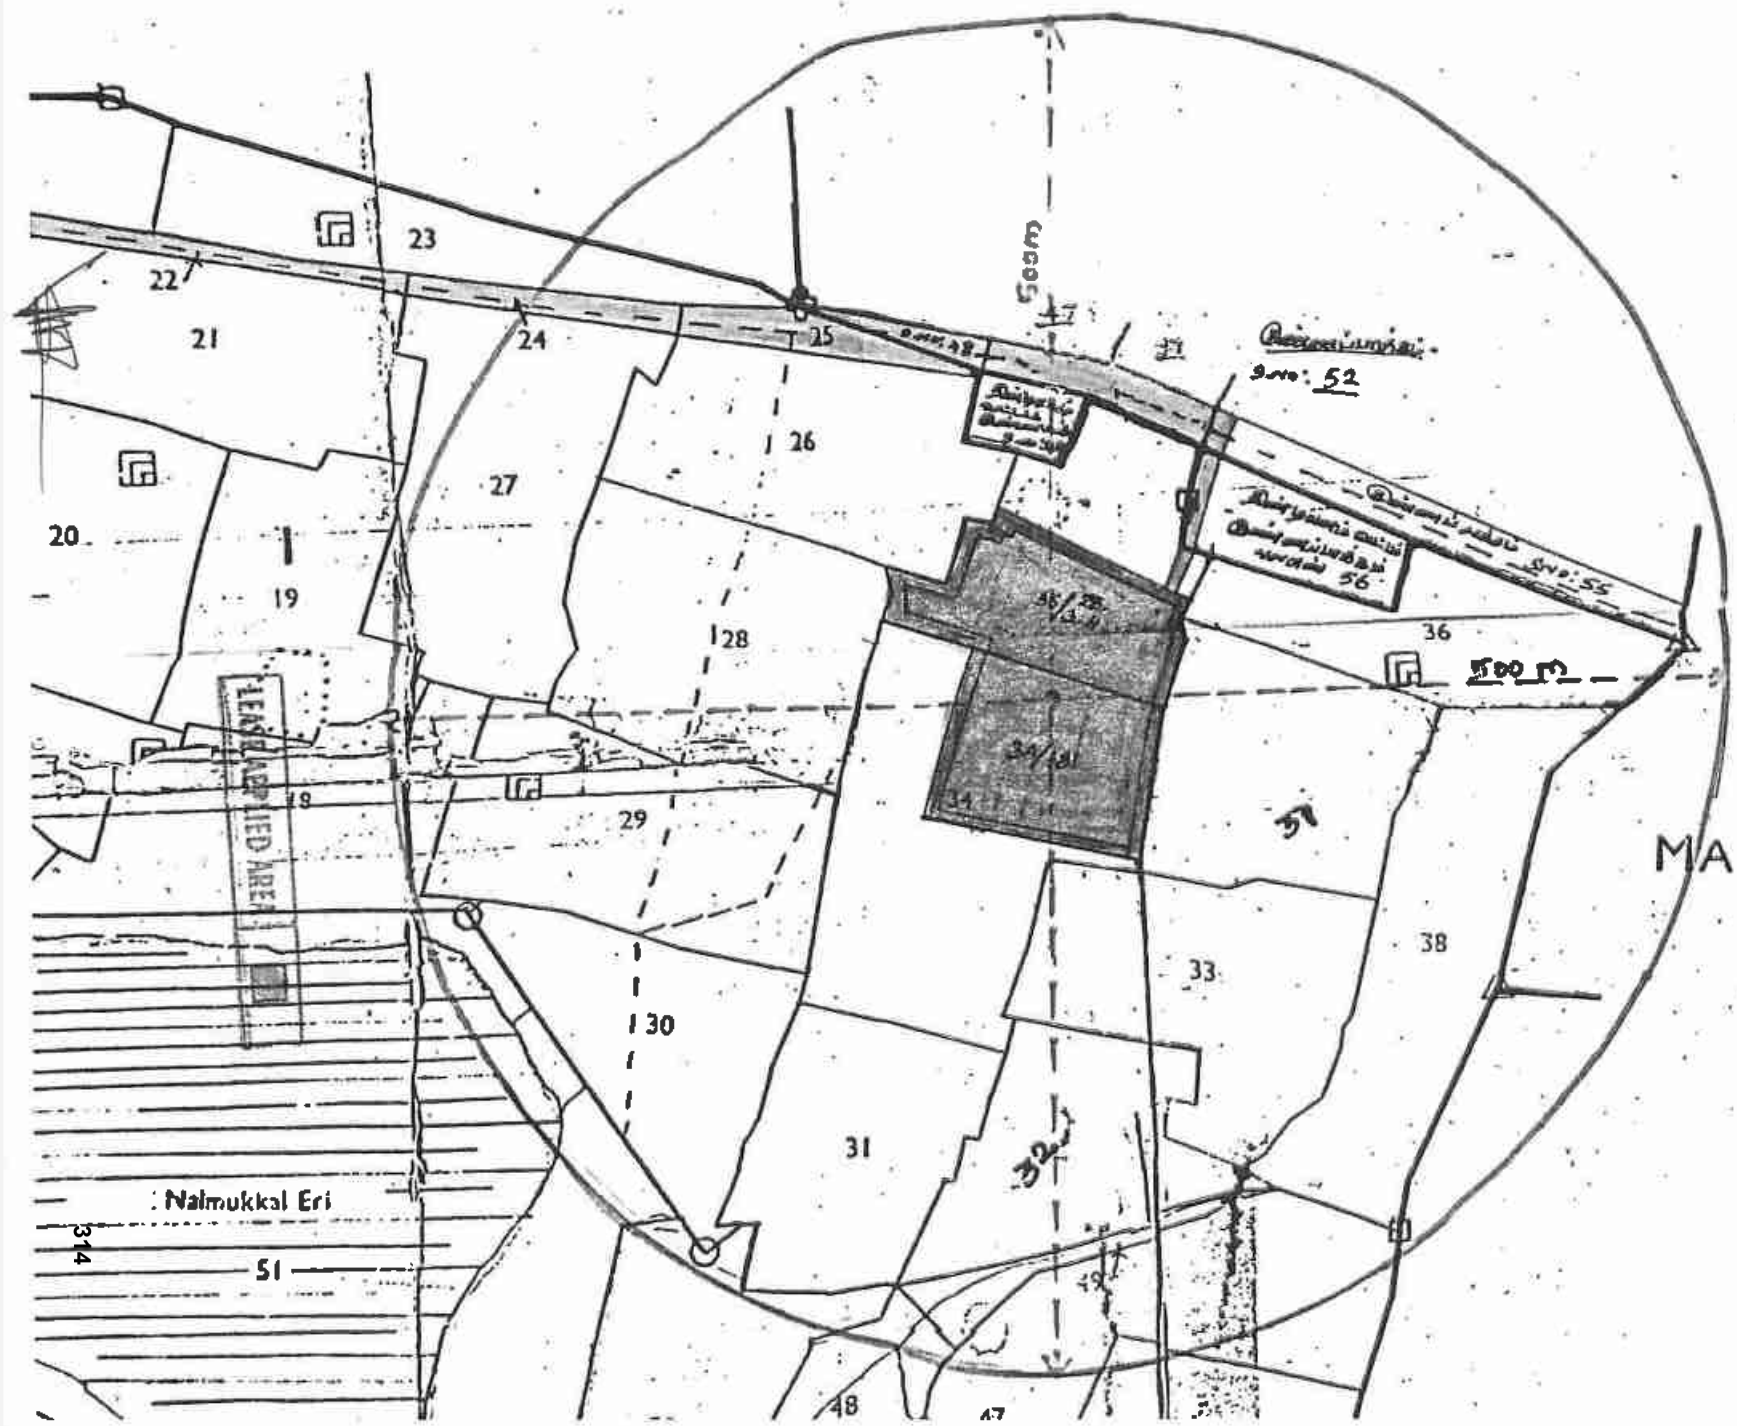
No. 171
MADAVANTAN
ANNEXURE III
16 MAR 20
Naimukkal Eri
LEVEL APPLIED AREA
22
23
24
25
21
20
19
26
27
28
29
30
31
32
33
34
34/1
36
38
51
48
47
314

ANNEXURE IV

06 MAR 2024

விழுப்புரம்

தமிழக அரசு

வருவாய்த் துறை

நில உரிமை விபரங்கள் : இ. எண் 10(1) பிரிவு

மாவட்டம் : விழுப்புரம் வட்டம் : மரக்காணம்

வருவாய் கிராமம் : நல்முக்கல் பட்டா எண் : 425

உரிமையாளர்கள் பெயர்

1. வரதராஜிகவுண்டர் தந்தை நாகராஜன்

புல எண்	உட்பிரிவு	புன்செய்		நன்செய்		மற்றவை		குறிப்புரைகள்
		பரப்பு	தீர்வை	பரப்பு	தீர்வை	பரப்பு	தீர்வை	
		ஹெக் - ஏர்	ரூ - பை	ஹெக் - ஏர்	ரூ - பை	ஹெக் - ஏர்	ரூ - பை	
34	1B1	2 - 43.00	6.70	--	--	--	--	rtr2591/11--- -- 22-06-2011
35	2B	0 - 28.00	0.80	--	--	--	--	D5679/2011--8A38/1414 -- 09-08-2004
35	3	0 - 88.00	2.42	--	--	--	--	D5679/2011--- -- 13-08-2004
35	4	1 - 16.00	3.19	--	--	--	--	D5679/2011--- -- 25-08-2003
		4 - 75.00	13.11					

குறிப்பு2 :

1. மேற்கண்ட தகவல் / சான்றிதழ் நகல் விவரங்கள் மின் பதிவேட்டிலிருந்து பெறப்பட்டவை. இவற்றை தாங்கள் **https://eservices.tn.gov.in** என்ற இணைய தளத்தில் **07/11/157/00425/110761** என்ற குறிப்பு எண்ணை உள்ளீடு செய்து உறுதி செய்துகொள்ளவும்.
2. இத் தகவல்கள் 31-01-2021 அன்று 11:01:29 AM நேரத்தில் அச்சடிக்கப்பட்டது.
3. கைப்பேசி கேமராவின்2D barcode படிப்பான் மூலம் படித்து 3G/GPRS வழி இணையதளத்தில் சரிபார்க்கவும்

மாவட்டம் ... வட்டம் ... பிரிவு ... பிராமத்தில் வரு வரி புலவரி கைவரை காருபடி ... ஆய்வு கணக்கு

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)
34	181	243	670	495	[illegible]	—	—	—	—	—	—
35	28	4E0	0EE	425	—do—		—	—	—	—	—
35	3	0EE	248	425	—do—		—	—	—	—	—
35	4	1EE	319	435	—do—		—	—	—	—	—

[illegible]

(13)	(14)	(15)	(16)	(17)	(18)	(18a)	(19)

(1) எண், (2) பயன்பற்ற பயிர் செய்ய நிலமாக நிலம், (3) விலையாக மறுக்க தரிசாக நிலம், (4) பயிரிட தக்க தரிசு நிலம், (5) நிலையான புல தலைகளும் மற்றவை இதர மேய்ச்சல் நிலங்களும், (6) விலக்கப்பட்ட நிர்ர பயிரில் சேர்க்கப்படாத மரவகைகள் பயிர்களும் தோப்புகளும், (7) நடப்பு தரிசுகள் (8) இதர தரிசு நிலங்கள்

ANNEXURE V

26 MAR 2024

90/26 R F III-A-10-50,00,000 Cps.-GBP.-Mdu-7-2016.

ANNEXURE VI

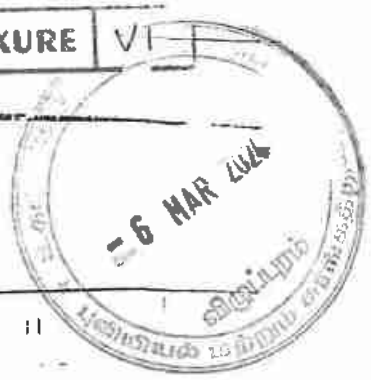

10

எண் 160 தமிழ்நாடு

1	2	3	4	5	6	7	8	9	10	11
								ஹெ. ஏ. சா.	ரூ. பை.	
34	...	25-2 31-3	ச	பு	...	8-4	7	2 75	6 35·0	10 84 294 பு. சக்ரபாணி முதலியார் (1). பி. ரெங்கனாத செட்டியார் (2). கு. வெங்கட செட்டியார் (3). க. அங்கம்மாள் (4)
35	1	29-1	ச	தீ.ப.த.	...	...	...	...	0 87·5	...
	2	-2	ச	பு	...	8-4	7	2 75	0 89·0	2 45 199 பி. ரெங்கன்ற செட்டியார்.
	3	25-2	ச	பு	...	8-4	7	2 75	0 88·0	2 42 199 பி. ரெங்கன்ற செட்டியார்.
	4	-2	ச	பு	...	8-4	7	2 75	1 16·0	3 19 28 சா. கஸ்தூரி அம்மாள்.
									3 80·5	8 06
36	...	28-3	ச	பு	...	8-4	7	2 75	3 02·0	8 31 105 ஆ. அட்டே
37	1	27-1A	ச	பு	...	8-4	7	2 75	0 62·0	1 71 79 க. சாமிகண்ண செட்டியார்.
	2	-1B	ச	பு	...	8-4	7	2 75	0 58·0	1 60 27 க. கண்ணுசாமி செட்டியார்.
	3	-1C -3	ச	பு	...	8-4	7	2 75	1 14·0	3 14 45 வே. சோதுலதான செட்டியார்.
	4	-1D	ச	பு	...	8-4	7	2 75	0 68·5	1 88 106 பா. நாராயண
	5	-2	ச	பு	...	8-4	7	2 75	0 40·0	1 10 45 வே. சோதுலதான செட்டியார்.
	6	-4A	ச	பு	...	8-4	7	2 75	0 31·0	0 85 27 க. கண்ணுசாமி செட்டியார்.
		-4B	ச	பு	...	8-4	7	2 75	0 77·0	0 74 45 வே. சோதுலதான செட்டியார்.
									4 00·5	11 0
	1	29-1	ச	பு	...	8-4	7	2 75	1 20·0	3 30 126 தலைவர் பூமிதான இயக்கம் மதுரை.
	2	-2	ச	பு	...	8-4	7	2 75	0 66·0	1 82 50 சா. சம்பத்து
	3	-3 30-1A	ச	பு	...	8-4	7	2 75	0 88·0	2 42 107 பி. நாராயண கவுண்டர்.
	4	-1B	ச	பு	...	8-4	7	2 75	1 04·5	2 87 132 வே. பெருமாள் செட்டியார்.

ம நீர்வாக அலுவலர்
), கீழ்அருங்குணம் (மே.ப)
ரைக்காணம் வட்டம்

அ-பதிவேடு விவரங்கள் - ஊரகம்

மாவட்டம் : விழுப்புரம்

வட்டம் : மரக்காணம்

கிராமம் : நல்முக்கல்

1. புல எண்	**34**	9. மண் வயனமும் ரகமும்	**8 - 4**
2. உட்பிரிவு எண்	**1B1**	10. மண் தரம்	**7**
3. பழைய புல உட்பிரிவு எண்	**34-1B**	11. தீர்வை (ரூ - ஹெ)	**2.75**
4. பகுதி	**P**	12. பரப்பு (ஹெக்டேர் - ஏர்)	**2 - 43.00**
5. அரசு / ரயத்துவாரி	**ரயத்துவாரி**	13. மொத்த தீர்வை (ரூ - பை)	**6.70**
6. நிலத்தின் வகை	**புஞ்சை**	14. பட்டா எண்	**425**
7. பாசன ஆதாரம்	-	15. குறிப்பு	-
8. இரு போகமா	-	16. பெயர்	**1.நாகராஜன்**

குறிப்பு:

1. மேற்கண்ட தகவல் / சான்றிதழ் நகல் விவரங்கள் மின் பதிவேட்டிலிருந்து பெறப்பட்டவை. இவற்றை தாங்கள் **https://eservices.tn.gov.in** என்ற இணைய தளத்தில் **07/11/157/34/1B1/100761** என்ற குறிப்பு எண்ணை உள்ளீடு செய்து உறுதி செய்துகொள்ளவும்.

அ-பதிவேடு விவரங்கள் - ஊரகம்

மாவட்டம் : விழுப்புரம்

வட்டம் : மரக்காணம்

கிராமம் : நல்முக்கல்

1. புல எண்	**35**	9. மண் வயனமும் ரகமும்	**8 - 4**
2. உட்பிரிவு எண்	**2B**	10. மண் தரம்	**7**
3. பழைய புல உட்பிரிவு எண்	**28-2**	11. தீர்வை (ரூ - ஹெ)	**2.75**
4. பகுதி	-	12. பரப்பு (ஹெக்டேர் - ஏர்)	**0 - 28.00**
5. அரசு / ரயத்துவாரி	**ரயத்துவாரி**	13. மொத்த தீர்வை (ரூ - பை)	**0.80**
6. நிலத்தின் வகை	**புஞ்சை**	14. பட்டா எண்	**425**
7. பாசன ஆதாரம்	-	15. குறிப்பு	-
8. இரு போகமா	-	16. பெயர்	**1.நாகராஜன்**

குறிப்பு:

1. மேற்கண்ட தகவல் / சான்றிதழ் நகல் விவரங்கள் மின் பதிவேட்டிலிருந்து பெறப்பட்டவை. இவற்றை தாங்கள் **https://eservices.tn.gov.in** என்ற இணைய தளத்தில் **07/11/157/35/2B/100761** என்ற குறிப்பு எண்ணை உள்ளீடு செய்து உறுதி செய்துகொள்ளவும்.

இணைப்பு-7

VILUPPURAM DISTRICT

DISTRICT SURVEY REPORT OF ROUGH STONE

(Prepared as per Gazette Notification S.O.3611 (E) dated 25.07.2018 of Ministry of Environment, Forest and Climate Change)

Taluks
Villupuram District

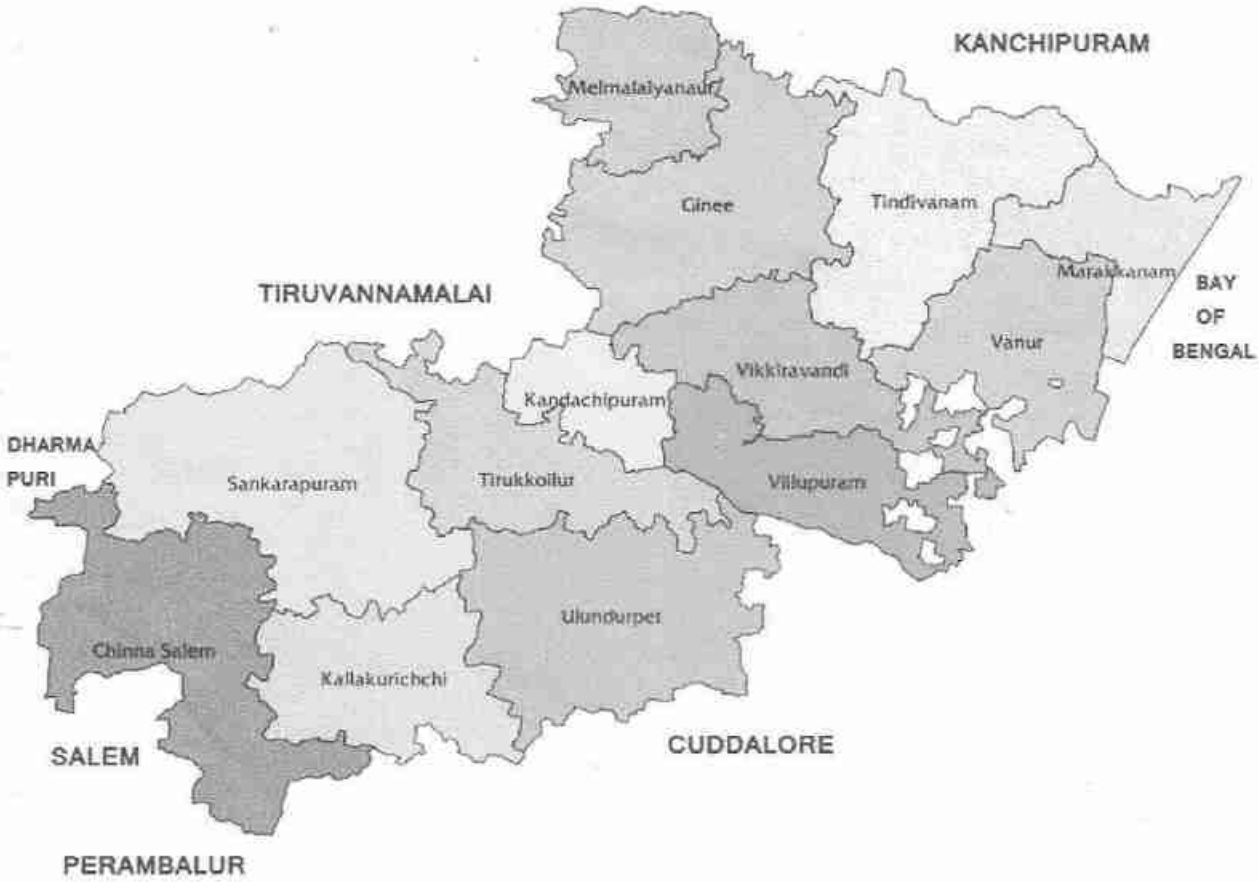

MAY -2019

VILUPPURAM DISTRICT

DISTRICT SURVEY REPORT OF ROUGH STONE

Chapter	Content	Page No.
1.	Introduction	1
2.	Overview of Mining Activity in the District	1
3.	General Profile of the District	2
4.	Geology of Viluppuram District	5
5.	Drainage of Irrigation pattern	8
6.	Land Utilisation Pattern in the District: Forest, Agricultural, Horticultural, Mining etc.,	12
7.	Surface Water and Ground Water scenario of the District	15
8.	Climate and Rainfall of the District	19
9.	Details of Mining Leases in the District	21
10.	Details of Royalty or Revenue received in last three years	36
11.	Details of Production of Minor Mineral in last three years	36
12.	Mineral Map of the District	37
13.	List of Letter of Intent (LOI) Holder in the District along with its validity	38
14.	Total Mineral Reserve available in the district	40
15.	Quality/Grade of Mineral available in the district	58
16.	Use of Mineral	58
17.	Demand and supply of the Mineral in the last three years	58
18.	Mining Leases marked on the map of the district	59
19.	Details of the area of where there is a cluster of the mining leases	60
20.	Details of Eco-sensitive area	62
21.	Impact on the environment due to Mining activity	62
22.	Remedial measures to mitigate the impact of mining on the environment	63
23.	Reclamation of the mined out area	66
24.	Risk assessment & Disaster Management Plan	66
25.	Details of Occupational health issue in the District	73
26.	Plantation and Green belt development in respect of leases already granted in the district	74
27.	Any other information	74

1) Introduction:

Viluppuram district evolved from the erstwhile composite South Arcot District and commenced functioning from 30th September 1993 as 23rd district of Tamil Nadu State with its Head Quarters as Villupuram and the Viluppuram district is bounded by Bay of Bengal and the Union Territory of Puducherry in the East and Kancheepuram and Thiruvannamalai District in the North, Cuddalore District in the South and Dharmapuri and Salem Districts in West and it covers with a total area of 7194 sq.km. This district lies between 11°38'25"and 12°20'44" of north latitude and 78°15'00"and 79°42'55" of east longitude.

The main minor minerals available in the district include Dolerite Dyke (Black Granite), Migmatites (Multi colour Granite), Rough stone, Brick Earth, Red Earth, Silica Sand , Pebbles and River sand.

As a result of developmental activities and market demand for minor minerals, mining of minor mineral is vital. The mining if not carried out systematically, will result in ill-effects and environmental degradation in project effected area. Therefore a sustainable development of the area involving extraction of mineral wealth vis-à-vis protection of environment is the ultimate solution for betterment of mankind. With the objective of generating Viluppuram District Survey Report for minor minerals, a ten days collaborative field work was carried out by Viluppuram District Geology and Mines Department and Geological Survey of India to locate minor minerals, along with mining activities in the District.

2) Overview of mining activity in the district:

Rocks and Minerals of Economic importance found in Villupuram District are mainly Black Granite (Dolerite), Multi Colour Granite, Rough stone, Silica Sand, Red Earth, Pebbles, and Gravel occur at various places in the district.

Private companies play a major role in quarrying activity for minor minerals and the State Government undertaking viz., TAMIN takes a significant role in quarrying for granite and silica sand in the district. As of now 85 Rough Stone quarry leases, 18 Red earth, Gravel and Pebbles quarry leases are in existence. 68 quarry leases for black granites (dolerite) and 7 quarry leases for Multi colour granites (migmatite) were granted for dimension stone and 3 quarry leases for silica sand and 2 quarry leases for River Sand were also granted in the district.

3) General profile of the District.

3.1 Origin

Viluppuram District was segregated from the South Arcot District on G.O.Ms.No.1486 Revenue Y(3), Dated 18.12.1992 and became a separate district on 30th September 1993.

3.2 Location

Viluppuram District is located in northern Tamil Nadu and is about 160 k.m. south of Chennai. The District has an area of 7194 Sq.Km. and it is bounded by Bay of Bengal and the Union Territory of Puducherry in the East and Kancheepuram and Thiruvannamalai District in the North, Cuddalore District in the South and Dharmapuri and Salem Districts in West. In 1076 Km coastline of Tamil Nadu, this district has a coastline of 30 Km. This district lies between 11°38'25"and 12° 20'44" of north latitude and 78°15'00"and 79°42'55" of east longitude.

Viluppuram District is well connected by rail and road . Viluppuram Junction connects all major cities of India. NH 45 and NH 66 passing through the Viluppuram District connects major cities and towns of Tamilnadu. The nearest port located at Pondicherry which is about 40 km

eastern side of Viluppuram. Location map of the Viluppuram district is shown in plate no.1.

Plate No: 1. Location Map of Viluppuram District

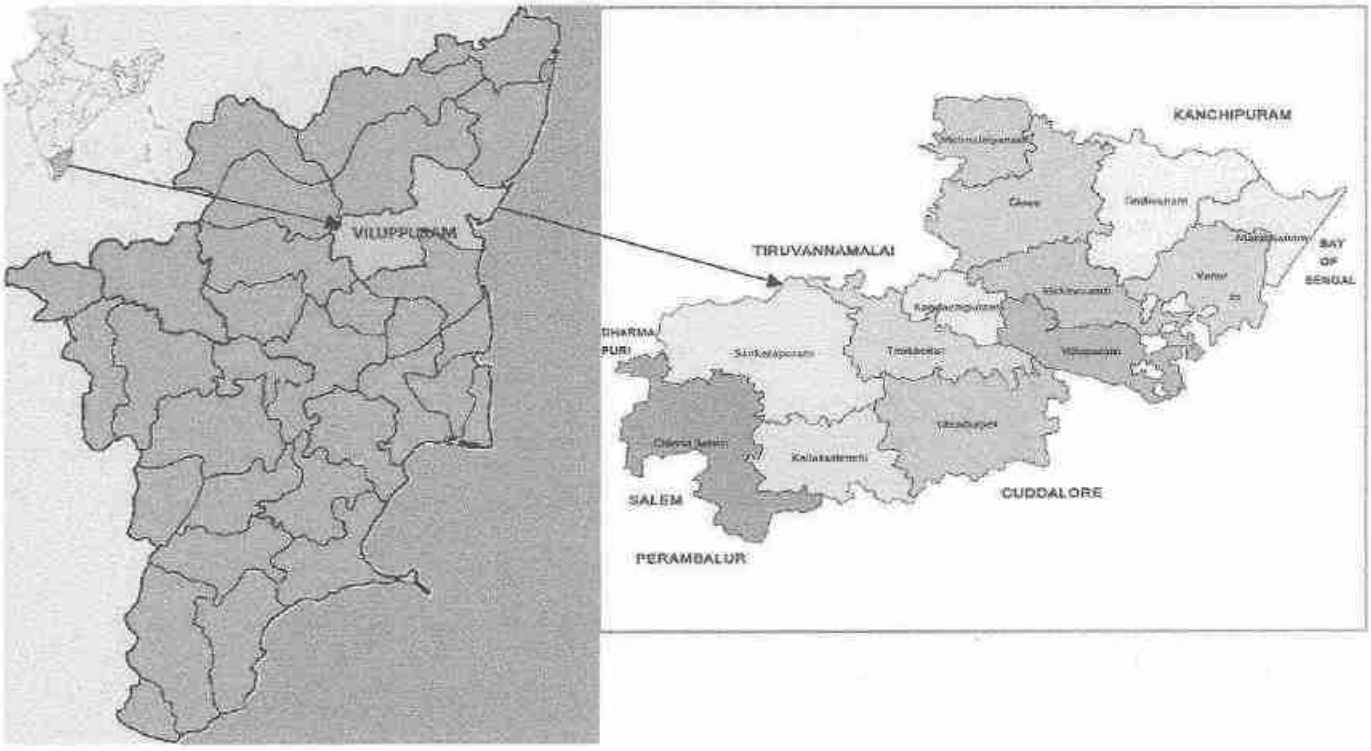

3.3 Area and Population

According to the Department of Statistics, Chennai, the Viluppuram District covers an area of 7194 square kilometers. Villupuram district occupies the First rank among the Districts of the state of Tamil Nadu with regard to its size. The population of the District is 34,58,873 and out of this population, 17,40,819 (50.30 %) are males and the remaining 17,18,054 (48.7%) are females.

3.4 Administrative set - up

Viluppuram District consists of Four Revenue Divisions viz., Viluppuram, Tindivanam, Tirukoilur and Kallakurichi and the District has 13 Revenue Taluks, 3 Municipalities (Viluppuram, Tindivanam & Kallakurichi), 15 Town Panchayats, 22 Panchayat Blocks, 1099 Village panchayats and 1490 Revenue villages. It falls part of three parliamentary constituencies and eleven assembly constituencies in Viluppuram District.

Sl. No.	Name of the Division	Name of the Taluk
1	Viluppuram	Viluppuram
2		Vanur
3		Vikkiravandi
4	Tindivanam	Tindivanam
5		Gingee
6		Marakkanam
7		Melmalayanur
8	Tirukoilur	Tirukoilur
9		Ulundurpet
10		Kandachipuram
11	Kallakurichi	Kallakurichi
12		Sankarapuram
13		Chinnasalem

3.5 Agricultural Resources and Irrigation

The district receives the maximum rainfall during the north east monsoon season and it belongs to the North eastern agro-climatic zone and 76 per cent of the land holders own less than one hectare of land in this district. The major crops grown in the district are paddy, groundnut, sugarcane, kambu, gingelly, cotton and tapioca. Almost 50% of the total area is under agriculture. Paddy occupies the maximum area of 1.66 lakh ha, followed by groundnut (0.84 lakh ha), pulses (0.52 lakh ha), sugarcane (0.46 lakh ha) and kambu, (0.20 lakh ha). Maize, gingelly and cotton are grown in an area of about 10,000 ha each. The area of kambu, ragi, maize and pulses has increased comprehensively. The area of paddy and sugarcane is more or less constant over the years. The oilseed crops like groundnut, sunflower and castor have increased markedly over the years. It is the home of four sugar

mills and modern rice mills. Handloom industry also flourishes in the district because of cotton cultivation.

The main reservoirs located in viluppuram distirct are Vidur, Gomugi and Manimukthanathi. According to the Viluppuram District statistical hand book, the major type of irrigation is dug wells which fed about 126870 hectares of lands. Tube wells and tanks irrigate an area of 44337 and 24155 hectares respectively.

3.6 Trade and Commerce

Viluppuram district located about 160 km south of Chennai which makes the district one of the suitable district to setup industries. Viluppuram district is producing large quantities of agricultural and poultry products. There are many market committees in Gingee, Tindivanam and Viluppuram functioning in the district for the purchase and sale of rice, cotton, groundnut, gingelly and other oil seeds. The co-operative societies for milk are functioning in all part of the district. There are number of crusher units situated in the district which supplies size reduced stone (jelly) and M-Sand to various part of Tamilnadu. There are number dolerite dyke (black granite) quarries situated in the Viluppuram district which produce highest quality of granites. These granite blocks are mainly exported to countries like Japan, South Koriea, The Netherlands and the Unitied kingdom.

There are three Co-operative sugar mills (Periyasevalai, Moongilthuraipattu, Kachirayapalayam) and three private sector sugar mills also existing in viluppuram district.

4. Geology of the District:

The generalized Geology of the district is as follows:

Recent and Sub-Recent	Soil
	Alluvium
	Laterite

Mio - Pliocene	Cuddalore Sandstone with intercalations of clay, shale and pebble bed
Lower Jurassic (Upper Gondwana)	Shales and sandstones
Archaean	Basic dykes, Pegmatites and Quartz veins
	Granites
	Norites
	Charnockitic rocks
	Garnet plagioclase and pyroxene plagioclase rock (Anorthosite)
	Talc Rock (altered ultrabasic rock)
	Talc-Chlorite-Epidote Rock
	Sillimanite – Quartzite
	Magnetite Quartzite
	Hornblende granulites and amphibolites

A greater part of the district is covered by rocks belonging to Archaean age comprising the Charnockite Group, the Migmatite Complex, Sathyamangalam Group and the Bhavani Group and alkali complex of Proterozoic age. West of Kallakurichi (southwestern part of the district), the area comprises the Charnockite Group of rocks viz. charnockite, pyroxene-granulite and garnetiferous gabbro. West of Tirukoilur (central part of the district) and east of the charnockite terrain (i.e., kallakurichi area) the Migmatite complex is made up of Hornblende-biotite gneiss. Pink augen gneiss and pink migmatite with younger instructions of Tindivanam and Gingee Granites (2250 Ma) and basic dykes (Proterozoic). The Migmatite Complex forms the major country rock of the area covering more than sixty percent and extending towards east upto Vikravandi, South of Gingee. Epidote-hornblende gneiss (Proterozoic age) occurs as small isolated outcrops. Dolerite dykes form the youngest basic instrusives traversing both Charnockite as well as the migmatite country equally. Overlying the Archaeans are the marine fossiliferous Upper, Cretaceous and Palaeogene Formations occurring in two separate sub-basins separated by thick cover of alluvial sediments deposited by Gadilam and Pennaiyar rivers. The two sub-basins are recognized as Vridhachalam sub-basin and Pondicherry sub-basin. In

Vridhachalam sub-basin, the marine Upper Cretaceous seidements are divisible into four formations viz., Parur Formation, Patti Formation, Mattur Formation and Alladi Formation. The Parur Formation is not exposed in the district. The Patti Formation comprises fossiliferous sandy limestone and Calcareous shale. Mattur Formation and Aladi Formation are chiefly composed of argillaceous sandstone and shales with pockets of fossiliferous limestone. The Pondicherry sub-basin is partly exposed in the eastern part of viluppuram district and the Upper Cretaceous sediments are divisible into Vanur Formation, comprising argillaceous sandstone with hard bands of calcareous sandstone and Nesal Formation comprising fossilferous shale, siltstone and bands of shell limestone. The Palaeocene rocks, overlying the Upper Cretaceous Formations, are divided into Karasur Formation comprising fossiliferous limestone with calcareous shale and Manaveli Formation comprising siltstone and fine grained argillaceous sandstone and recognized as Putturai Group. The Tertiary rocks comprises the Cuddalore Formation, consisting of cobbly and pebbly sandstone, mottled sandstone, ferruginous sandstone with bands and lenses of clay besides lignite seams. This formation contains large quantities of fossil wood around Thiruvakkarai which have been declared and maintained as National Fossil wood Park by G.S.I. These are overtain by the Quarternary fluvial, marine and Aeolian formations along the coast as well as river courses.

The terrain displays much structural complexity due to the multiple deformation it has suffered. A number of prominent shear zones have been recognised viz., N-S shear shone, east of Gingee town and NNE-SSW to ENE-WSW among which the one trending NNE-SSW near the eastern foot of the Kalrayan hills SW of Kallakurichi is the most striking. (GSI- Viluppuram District Resource Map)

Mineral Wealth

The occurrences of limestone, limeshells, clay and reh salt are reported from the district. The polymetal sulphide deposit occurrence, eleven

kilometers southwest of Mamandur, in the granulite terrain has been extensively studied by way of mapping, sampling, geophysical surveys and drilling by GSI, BGML and by Tamil Nadu Government (UNDP Programme). The polymetal deposit includes ares of copper, lead and silver. The district forms the hub for exploitation of dimensional stone viz., granite deposit in the country. The world famous black granite. Dykes of Kunnam area, Vanur taluk are rated at par with the Swedish "EBONY" black. WNW-ESE and NE-SW dykes swarm between Mailam- Perumbakkam-Kunnam- Thiruvakkarai-V.Parangini village is considered to be the potential zone for exploitation of industrial granites. In addition, the district is also noted for multi-coloured granite occurrences of Gingee area. Gypsum occurs in the eastern flank of Kaliveli tank near Marakkanam, Limeshells are locally recovered from the coastal lagoons of Marakkana. Reh salt (sodium sulphate and carbonate) occur near the eastern flanks of Kaliveli near Marakkanam.

Field photograph: Rough Stone Quarry at Keezh Arungunam Village, Marakkanam Taluk.

Field photograph: Rough Stone Quarry at Keezhmalai Village, Gingee Taluk.

5. Drainage of Irrigation Pattern

Irrigation Practices

The nine-fold land use pattern (2005-06) in the district is given in the

Table below.

S. No.	Classification	Area (Ha)
1	Forests	71697
2	Barren & Uncultivable Lands	56651
3	Land put to non agricultural uses	135874
4	Cultivable Waste	10405
5	Permanent Pastures & other grazing lands	4195
6	Groves not included in the net area sown	6142
7	Current Fallows	86725
8	Other Fallow Lands	19802
9	Net Area sown	330712
	Total	**722203**

The chief irrigation sources in the district are wells, tube wells, tanks and canal. The block-wise number of irrigation sources in the district is given in the Table below.

S. No.	Block	Canals	Tanks	Tube wells	Ordinary wells
1	Melmalayanur	1	85	468	10911
2	Gingee	0	132	0	11821
3	Vallam	0	119	533	10509
4	Olakkur	1	116	252	6028
5	Mailam	1	94	750	2259
6	Marakanam	0	150	1418	9986
7	Koliyanur	41	55	3385	1388
8	Kanai	18	86	298	10162
9	Kandamangalam	0	62	4597	4843
10	Vikkiravandi	0	170	1332	9799
11	Mugaiyur	24	100	645	5492
12	Tirukoilur	7	60	585	2191
13	Rishivandiyam	0	129	13	6683
14	Sankarapuram	0	101	0	5319
15	Thiruvennainallur	31	135	3765	16421
16	Thiyagadurgam	4	54	63	11387

17	Kallakurichi	0	0	25	608
18	Chinnasalem	32	93	38	9306
19	Kalrayan Hills	4	123	0	8540
20	Ulundurpet	14	81	45	11302
21	Tirunavalur	4	58	1775	3285
22	Vanur	14	82	3467	6631
	Total	**196**	**2085**	**23454**	**164871**

The block-wise and source-wise net area irrigated (2005-06) in the district is given below.

S. No.	Block	Net area Irrigated (Ha)					
		Canals	Tanks	Tube wells	Ordinary wells	Other sources	Total
1	Melmalayanur	0	2597	1200	9138	0	12935
2	Gingee	0	4211	0	8401	0	12612
3	Vallam	0	3790	1384	5623	0	10797
4	Olakkur	0	3239	1264	4741	0	9244
5	Mailam	102	2321	2554	5682	0	10659
6	Marakanam	0	3172	4167	6708	0	14047
7	Koliyanur	0	3196	6069	0	0	9265
8	Kanai	0	3866	1083	5324	0	10283
9	Kandamangalam	0	939	11276	522	0	12737
10	Vikkiravandi	0	3342	3500	4890	0	11732
11	Mugaiyur	980	2415	3376	5100	0	11871
12	Tirukoilur	314	3214	682	5355	0	9565
13	Rishivandiyam	290	2266	68	8871	0	11495
14	Sankarapuram	587	3779	0	8503	0	12869
15	Thiruvennainallur	72	4847	5385	653	0	10957
16	Thiyagadurgam	1525	0	464	5581	0	7570
17	Kallakurichi	2200	2479	12	10128	0	14819
18	Chinnasalem	411	2295	287	14943	0	17936
19	Kalrayan Hills	68	0	0	2012	102	2182
20	Ulundurpet	0	3258	641	5189	0	9088
21	Tirunavalur	0	4386	2741	2588	0	9715
22	Vanur	99	1593	8372	699	0	10763
	Total	**6648**	**61205**	**54525**	**120661**	**102**	**243141**

The well irrigation is highest in Chinnasalem followed by Kallaruichi, Melmalayanur, Rishivandiyam, Sankarapuram, and Gingee so on.
(Viluppuram district groundwater brochure, Central Ground Water Board).

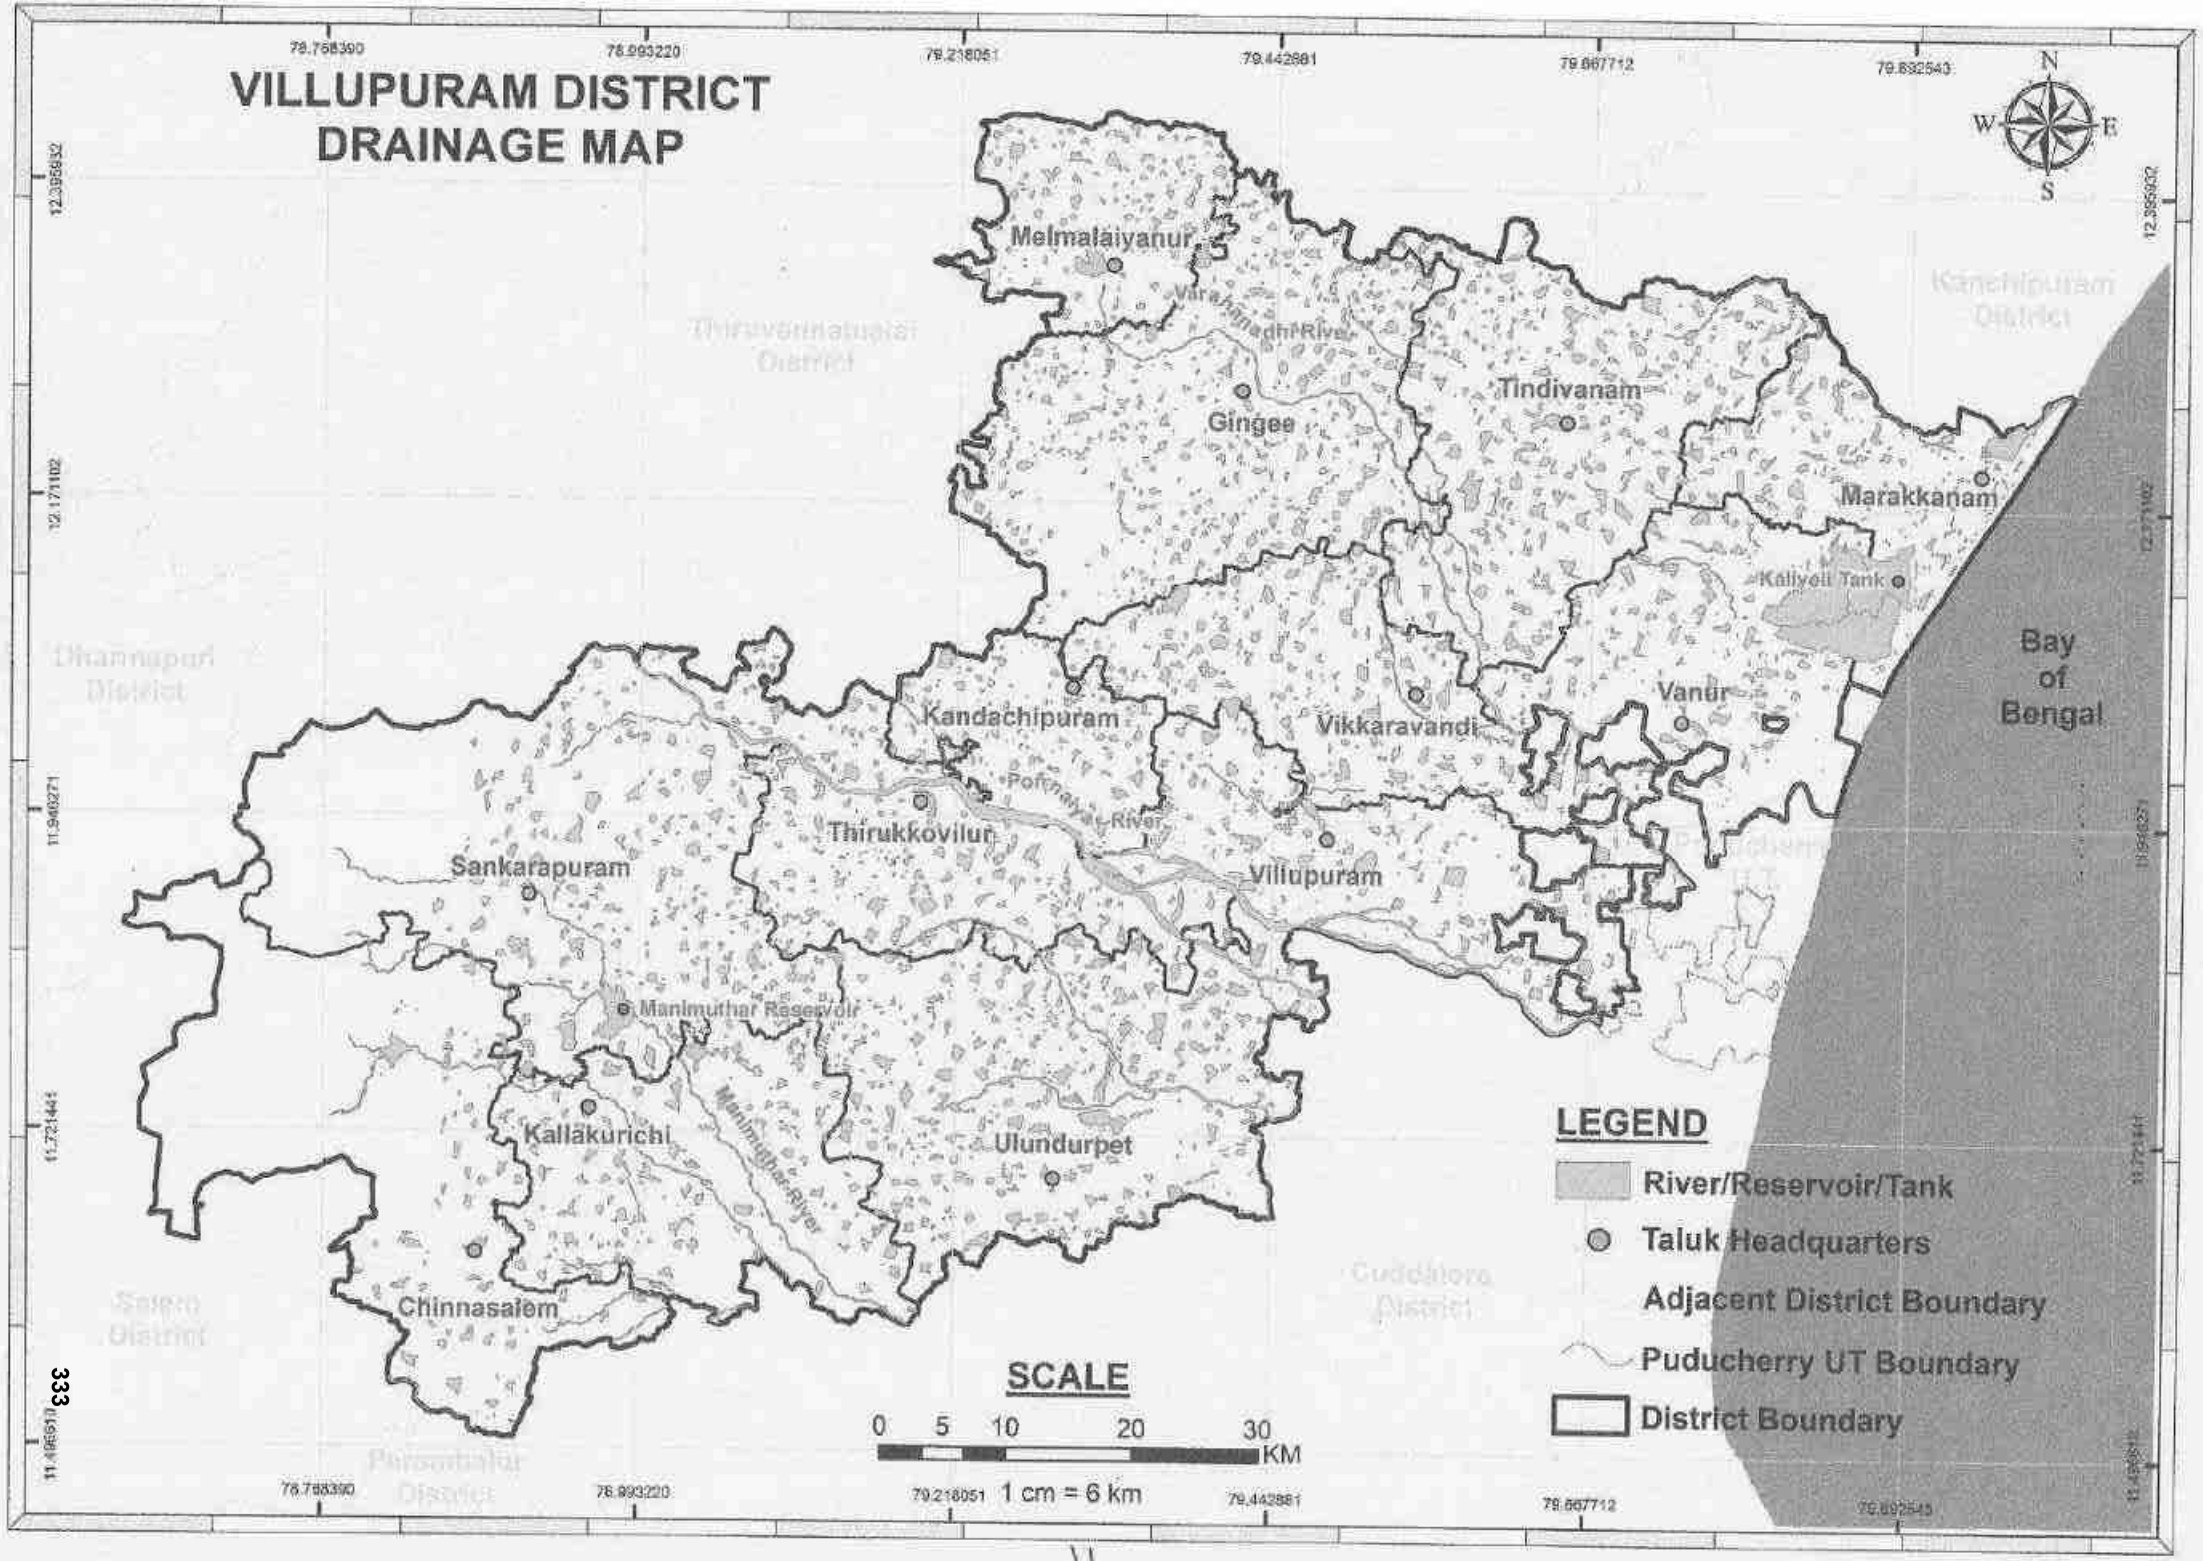
VILLUPURAM DISTRICT
DRAINAGE MAP
N
W
E
S
Melmalaiyanur
Varahanadhi River
Gingee
Tindivanam
Marakkanam
Kaliyeli Tank
Bay
of
Bengal
Kandachipuram
Vikkaravandi
Vanur
Ponnaiyar River
Thirukkovilur
Villupuram
Sankarapuram
Manimuthar Reservoir
Kallakurichi
Manimuthar River
Ulundurpet
Chinnasalem
LEGEND
River/Reservoir/Tank
Taluk Headquarters
Adjacent District Boundary
Puducherry UT Boundary
District Boundary
SCALE
0 5 10 20 30
KM
1 cm = 6 km

6. Land Utilization Pattern in the District: Forest, Agricultural, Horticultural, Mining etc;

Out of the total land area of 7.22 lakh hectares, an extent of 3.31 lakh hectares (45.8 percent) is utilised for cultivation. The waste land (Categories 3&5) available in the district is 67056 ha. Vast stretches of waste land are formed in Gingee, Kallakurichi, Marakkanam and Vanur Blocks. Forest land accounts for 9.93 per cent in the geographical area in the district .

Sl. No.	Classification	Area (Ha)
1	Forests	71697
2	Barren & Uncultivable Lands	56651
3	Land put to non-agricultural uses	135874
4	Cultivable Waste	10405
5	Permanent Pastures & other grazing lands	4195
6	Groves not included in the net area sown	6142
7	Current Fallows	86725
8	Other Fallow Lands	19802
9	Net Area sown	330712
	Total	722203

6.1 Forest:

Forest area in the district constitutes about 9.9% of the total area of the District and lies in the areas bordering Salem, Dharmapuri and Thiruvannamalai Districts.

The forests of this district are divided into three regions from the points of view of topography, soil conditions and flora. They are: -

The coastal regions -- containing the casuarinas plantations, sand dunes, the mangroves and scrub jungle. The whole of Pitchavaram, Pitchavaram extension and Killai Reserved Forests and the Porto Novo and Ariyakosti.

The lateritic region -- containing the extensive cashew plantation and the dry evergreen forest – Kangiruppum Bit I and II,

Velangulam, Ammeri, Narimanam, Semakottai and Extension, Kallamedu and Kuttady Reserved Forests.

The inland plains region – containing the eucalyptus and miscellaneous fuel plantations and the thorny scrub jungles – Alwarmalai, Varanjaram, Porasakurichi, Magarur, Kattumailur, Nangur, Krishnapuram, Thottapadi, Kottalamalai, Melpalangur, Mallapuram and Poosapadi Reserved Forests and Pandur, Sirupakkam, Kattayanallur, Kuttakudi.

Gingee and Kalrayan Hills are the two hills in the district. Teak wood, rose wood and sandal wood trees are grown in the hills. In the Kalrayan Hills and Gingee areas some medicinal plants are also grown. In the social forest areas, trees raised are mainly for firewood and paper making. Babul, Eucalyptus and Casuarina are grown in the district. In some pockets of the district, cashew is also grown.

6.2 Agriculture:

The district receives the maximum rainfall during the north east monsoon season and it belongs to the North eastern agro-climatic zone and 76 per cent of the land holders own less than one hectare of land in this district. The major crops grown in the district are paddy, groundnut, sugarcane, kambu, gingelly, cotton and tapioca. Almost 50% of the total area is under agriculture. Paddy occupies the maximum area of 1.66 lakh ha, followed by groundnut (0.84 lakh ha), pulses (0.52 lakh ha), sugarcane (0.46 lakh ha) and kambu, (0.20 lakh ha). Maize, gingelly and cotton are grown in an area of about 10,000 ha each. The area of kambu, ragi, maize and pulses has increased comprehensively. The area of paddy and sugarcane is more or less constant over the years. The oilseed crops like groundnut, sunflower and castor have increased markedly over the years. It is the home of four sugar mills and modern rice mills. Handloom industry also flourishes in the district because of cotton cultivation.

6.3 Horticulture :

Tapioca and cashew are the most important horticultural crops accounting for the major area under horticulture in the district. The major development activities in respect of horticultural development happening around the district are Net house structure, nursery and vegetable production, pandal for vegetable production, plant protection package for vegetables, plastics crates for vegetable handling and transport, farm waste shredder/vegetable waste shredder, cashew high density planting, borewell with casing pipe, banana bunch cover, humic acid/effective e-Microbes, production of disease free planting materials, grapes bird net, tractor mounted steam boiler, support system for crops, banana, gloriosa, banana corm injector, mango harvester, Enterprising Farmers Associations, Community fencing, Support for betelvine and Support for senna cultivation.

6.4 Mining:

Hilly, undulating terrain like Kommedu, Mattaparai of Gingee Taluk, Mookkanur of Sankarapuram, Karadi of Tirukoilur, Ammanampakkam of Tindivanam are being mined for Multi-Colour Granite. The elevated hilly and undulating terrain around Tiruvakkarai, Kunnam, Semangalam, Sirunavoor, Karasanur, Perumbakkam and Eraiyur of Vanur Taluk, Udaiyanatham, Malligaipattu, Kangeyanur, Siruvalai, Muttathur, Vengamur, Hanumanthapuram, Kaanai and Kunnathur of Villupuram Taluk, Eraiyanur, Varagupattu, Adasal, Nagar and Sirvadi of Tindivanam taluk, Pothuvai-Pazhavalam, Nagalampattu, Sathaputhur, Padipallam, Thatchampattu, Valathi, Irumpuli, Sathaputhur, Sorathuperiyan kuppam of Gingee taluk, Eeriyur of Chinnasalem taluk, Thirukkanangur, Kaduvanur, Gudaram of Sankarapuram taluk, Ulagiyanallur and Sithallur of Kallakurichi taluk, Kuzhundiram pattu of Tirukoilur taluk are being mined for Black Granite.

Blue metal is being mined from undulating, barren or agricultural field areas of Thiruvakkarai, Eraiyur, Thenkodipakkam, Nemili, Murukkam, Thollamur, Ulagapuram, Peravur of Vanur taluk, Nalmukkal, Algaiyapakkam, T. Nallalam, Keelarungunam, Vilangampadi, Kunnapakkam, Yenthur, Chokkanthangal, Keelsiviri, Brammadesam, Keelsevur, Madavanthangal, Perumkkal of Marakkanam and Tindivanam taluk, Sivanarthangal, T. Keeranur, Keelvalai and Veerapandi of Tirukoilur taluk, Pangaram and Rayarpalayam of Kallakurichi, Katchirayapalayam of Chinnasalem taluk, Gingeeputhur and Nangathur of Villupuram taluk, Poondi and Ulagalampoondi of Vikkiravanadi taluk, Tirupair and Kalsirunagalur of Ulundurpet taluk, Mallapuram, La. Kudalur, Aliabath, Manalur and Moongithuraipattu of Sanakarapuram taluk and Pappanthangal, Valathi, Kammanthangal, Mazhavanthangal, So. Kuppam, Kaplampadi, Avalurpet, Keelmalai, Perumbugai and Kaividanthangal of Gingee Taluk.

The Cuddalore sandstone derivative of Red Earth sediments lying in the eastern part of the district near Tiruvakkarai, Thollamur & Kadagampattu of Vanur taluk and Sengadu, Vaduganathakuppam of Villupuram taluk are being mined. The sand dunes (stablised and Palaeo) near the coastal stretch of Urani, Vadaagaram, Marakkanam, Keelputhupattu of Marakkanam taluk are being mined for Silica Sand. All along the track of rivers Pennaiyar River, Gadilam River, Malattar River, Pennar River, Sankaraparani River, Gomukhi River, Manimukta River, Pambaiyar and Varaganadhi sand is being mined mainly for construction purposes.

7. Surface Water and Ground Water Scenario:

Surface Water Scenario:

The major rivers flowing through the district are (i) Pennaiyar River flows from northwest to east in the district forms part of Pennaiyar river basin (ii) Gadilam River flowing through Thirukoilur Taluk, (iii) Malattar River joins Gadilam before flowing into the Bay of Bengal (iv) Varaga Nathi originate in Gingee Taluk and flows through Villupuram Taluk (v) Gomukhi the of main tributary of Manimuktha River joins into Vellar River in Cuddalore District (vi) Manimukta River originates in

Kalrayan hills and drains the southern part of the district (vii) Pambaiyar and the Varaganadhi originate in the uplands of the district and join Bay of Bengal. All these rivers are ephemeral (only seasonal) in nature and carry only floodwater during monsoon period and none of them are perennial. These rivers cannot be used for irrigation purpose to the expected level because of low precipitation. The monsoon rainfall is erratic and only during stormy days heavy precipitation occurs. The drainage pattern is mostly parallel to sub parallel and drainage density is very low. There are small reservoirs across rivers namely Gomukhi, Vedur and Manimuktha.

Ground water scenario

Hydrogeology

Villupuram district is underlain by crystalline metamorphic complex in the western part of the district and sedimentary tract in eastern side. The thickness of sediments exceeds 600m near southern part of the district. Groundwater occurs under phreatic and semi-confined conditions in consolidated formations, which comprises weathered and fractured granites, gneisses and charnockites whereas in unconsolidated sedimentary rocks the groundwater occurs in phreatic, semi-confined conditions in Vanur sandstone, Kadapperi kuppam formation and Turuvai limestone.

The district is having rocky outcrops in major part of Kallakurichi, Sankarapuram and Tirukoilur taluks. The weathering is highly erratic and the depth of abstraction structures is controlled by the intensity of weathering and fracturing. The depth of wells varies from 6.64 to 17 m bgl and water levels in observation wells tapping shallow aquifers varied from 0.74 to 9.7 m bgl during pre monsoon (May 2006) and it varies from 0.7 to 4.45 m bgl during post monsoon (January 2007).

During pre monsoon, the depth to water levels in the range of >2 to 5 m bgl in major part of the district, in the range of >5 -10 m bgl in western

and southeastern parts of the district and range of 0-2 m bgl were recorded in two isolated pockets . During post monsoon the depth to water levels range of >2 to 5 m bgl exists in major part of the district, range of 0 - 2 m bgl prevails in central and northeastern parts of the district and range of >5 - 10 m bgl were recorded in two isolated pockets in the southwester and north western parts of the district .

The depth to piezometric surface ranged from 2.8 to 11.25 m bgl during Pre monsoon and 0.5 to 6.35 m bgl during post monsoon. The ground water is being developed my means of dug wells, bore wells and tube wells. The diameter of the well is in the range of 7 to 10 m and depth of dug wells range from 15 to 18 m bgl depending on the weathered thickness and joints. The dug wells yield up to 1 lps in summer months and few wells remains dry. The yield is adequate for irrigation for one or two crops in monsoon period. The yield of bore wells in favorable locations vary from <1 to 6 lps. The valley fills, intersection of lineaments, particularly, in the western part along the foot hills of Kalrayan hills are reported to have potential pockets suitable for dug wells and bore wells. The area of contact between crystalline and sedimentary formations has variable yield prospects. The cretaceous formations are verycompact and yield prospects are low. The dug wells of 6 m diameter and 10 m bgl depth in sandy tracts give about 3.5 lps. The yield of tube wells in the sedimentary formation ranges from 2.4 to 37 lps.

Ground water resources

The ground water resources have been computed jointly by Central Ground Water Board and State Ground Water Resources Data Centre (PWD, WRO, Govt. of Tamil Nadu) as on 31st March 2004. The computation has been done using GEC1997 methodology. The salient features of the computations are furnished below.

Ground Water Quality

Ground water in phreatic aquifers in Villupuram district is, in general, colorless, odorless and slightly alkaline in nature. The specific electrical conductance of ground water in phreatic zone (µS/cm at 25° C) during May 2006 was in the range of 770 to 3650 in the district. Conductance below 750 has been observed only in select pockets of the district.

It is observed that the ground water is suitable for drinking and domestic uses in respect of all the constituents except total hardness and nitrate. In about 40% of samples, nitrate concentration is above permissible limits of 100 mg/l. The incidence of high total hardness is attributed to the composition of litho units constituting the aquifers in the district, whereas nitrate pollution is most likely due to use of fertilizers and other improper waste disposal.

Sodium Adoption Ration values range from 1.7 to 4.4 with an average value of 3.25 in the district. This implies that no alkali hazard is anticipated to crops.

Status of Ground Water Development

Ground water development is very high in the district. There are number of dug wells and dug cum bore wells in the hard rock areas while tube wells are common in the sedimentary areas. The average draft of dug wells in hard rock areas is of the order of 1.2 ha.m./year. The extraction of ground water by shallow tube wells in the eastern part of the district is of the order of 2.5 ha.m./year. The average command area for dug well and bore well in the district is 2 ha and 3 ha respectively.

The hard rock areas in select pockets with valley fills and lineaments are having appreciable ground water potential. At many pockets, the command areas are the main potential ground water zones, The yield prospects are good in select pockets of Villupuram, Sankarapuram and Kallakurichi areas where as it is very poor in Tirukoilur, Ulundurpet, Gingee and Tindivanam taluks. The massive granites in Gingee and Tindivanam taluks do not favour even bore wells. The augmentation of well yield by

horizontal and extension bores is successful in part of Kallakurichi and Tirukoilur areas.

The crystalline sedimentary contact zones have thick limestone capping followed by productive granular zones, which are tapped, by number of cavity wells of 40 to 60 m bgl depth giving 7 to 10 lps discharge. The tube wells can yield about 70 to 200 m3/hr and can sustain pumping for 10 hrs a day.

(Viluppuram district groundwater brochure, Central Ground Water Board)

8. Rainfall of the Viluppuram District and climatic condition:

This district falls under tropical climate. The average temperature varies from 26°C to 41°C. The humidity is also high in the order of 80%. The wind speed is high during the months of July and August. The wind speed ranges from 7.4 to 12.6 km/hr, which increases from 100 to 120 km/hr during cyclone period. District receives rainfall from southwest monsoon (June – September), northeast monsoon (October – December) and non-monsoon periods (January – May). The rainfall is generally heavy during low-pressure depressions and cyclones during the northeast monsoon period. The district receives the maximum rainfall during the north east monsoon season. The normal annual rainfall is higher towards coast. District does not get heavy rainfall with the exception of Marakkanam and Vanur blocks, In Kandamangalam and Koliyaur blocks, the rainfall is moderate it is scarce in Kallakurichi and Sankarapuram.

The rainfall data for the last ten years pertaining to Villupuram District is tabulated as follows:

Rainfall pattern data of Villupuram District for past six years (Data Source: District Meterological Dept.)

Month	Normal	2018	2017	2016	2015	2014
January	9.72	0.33	42.94	0.00	3.72	0.00
February	8.63	11.94	0	0.00	0.00	14.44
Winter	**18.35**	**12.28**	**42.94**	**0.00**	**3.72**	**14.44**
March	8.68	15.22	8.28	0.00	0.00	0.00
April	11.25	0.00	0.00	0.00	90.16	0.00
May	27.25	10.78	46.2	90.86	68.61	116.56
Summer	**47.18**	**26.00**	**54.48**	**90.86**	**158.77**	**116.56**
June	54.7	39.03	76.78	44.94	15.83	80.69
July	72.3	26.00	74.72	118.48	75.54	50.11
August	108.36	87.4	194.52	69.44	115.83	179.36
September	121.3	116.14	107.74	67.00	84.17	124.72
S.W. Monsoon	**356.66**	**268.58**	**453.76**	**299.86**	**291.37**	**434.88**
October	*252.11*	*167.33*	*223.4*	86.50	78.67	211.42
November	*317.8*	*156.18*	*178.96*	12.17	558.66	129.90
December	*68.2*	*17.88*	*130.29*	74.29	299.06	73.22
N.E. Monsoon	**638.11**	**341.39**	**532.65**	**172.96**	**936.39**	**414.54**
Total	**1060.30**	**648.25**	**1083.83**	**563.68**	**1390.25**	**980.42**

9. Details of Mining Lease
Name of the Mineral: Rough stone

Sl. No.	Name of the Mineral	Name of the Lessee	Address & Contact No. of Lessee	Mining lease grant order No. & Date	Area of Mining lease (ha)	Period of Mining lease (Initial)		Period of Mining lease (1st / 2nd renewal)		Date of commencement of Mining Operation	Status (Working/ Non Working / Temp working for dispatch etc.)	Captive / Non-Captive	Obtained Environmental Clearance (Yes/No) If Yes Letter no with date of grant of EC	Location of the Mining Lease (Latitude & Longitude)	Method of Mining (Opencast/ Underground)
						From	To	From	To						
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1.	Rough stone	T.Muthamizhan	S/o.Thennavan, Manalur Village, Sankarapuram Taluk, Viluppuram District.	B/G&M/ 2020/2010 dt. 31.08.2016.	1.50.0	31.08.2016	30.08.2021	-	-	06.02.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2682/EC/1(a)/1724/2014 dated 13.03.2015	12°00'30"N to 12°00'26"N 78°55'28"E to 78°55'23"E (12°00'27.7"N 78°55'21.8"E)	Open cast
2.	Rough stone	RSubramanian	S/o. Ramasamy, 15/3, Kattukottai Village, Yenapair Post, Kallakurichi Taluk, Viluppuram	B/G&M/371/11 dt. 26.11.2011	1.20.0	23.01.2012	22.01.2022	-	-	Nil	Non working	Non Captive	No.	11°50'21.78"N 79°07'10.61"E	Open cast
3.	Rough stone	K.Natchiappan	S/o.Karuppanna Gounder, Vellakulan, Keelaviri Post, Tindivanam Taluk	B/G&M/1213/13 dt.31.12.2015	2.23.0	31.12.2015	30.12.2020	-	-	25.02.2016	Non working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3439/EC/1(a)/2547/2015 dated 21.12.2015	12°11'56"N to 12°11'46"N 79°45'33"E to 79°45'26"E (12°11'47"N 79°45'29"E)	Open cast
4.	Rough stone	K. Shanmugam	S/o.Kamaiya Gounder, Nallavur Village & Post, Vanur Taluk, Viluppuram District.	A/G&M/522/2014 dated 09.09.2016	1.95.5	09.09.2016	08.09.2021	-	-	Nil	Non working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4167/EC/1(a)/3177/2015 dated 21.03.2016	12°08'58.60"N to 12°09'04.64"N 79°44'38.34"E to 79°44'54"E (12°09'04.63"N 79°44'38.34"E)	Open cast
5.	Rough stone & Earth	K.Anandavelu	S/o. Kesavan, No.96, Emiyur Village, Vanur Taluk, Viluppuram District	A/G&M/977/2012 dt.28.07.2017.	1.08.0	28.07.2017	18.03.2020	-	-	18.09.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2699/EC/1(a)/1702/2014 dated 19.03.2015	12°04'28"N to 12°04'24"N 79°38'39"E to 79°38'43"E (12°04'24"N 79°38'39"E)	Open cast
6.	Rough stone & Earth	A.Ganesan,	S/o.Appadurai, 190, Kadaiveetti,	A/G&M/822/2016 dated 22.08.2016	2.62.5	28.07.2017	18.03.2020	-	-	16.05.2018	Working	Non Captive	Yes, letter No.SEIAA-	12°04'12"N to 12°04'19"N	Open cast

			Eraiyur & post, Vanur taluk, Viluppuram District										TN/F.No.5064/EC/1(a)/3324/2016 dated 15.07.2016	79°38'39"E to 79°38'51"E (12°04'16"N 79°38'39"E)	
7.	Rough stone	P.Ramesh	S/o.Panchatcharam, 2/89, Main Road, Kaplampadi Village, Gingee Taluk, Viluppuram District.	B/G&M/2007/10 dt. 26.07.2014.	2.52.0	26.07.2014	25.07.2019.	-	-	30.09.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1316/EC/1(a)/588/2013 dated 18.07.2013.	12°22'843"N to 12°22'582"N 79°16'896"E to 79°16'770"E	Open cast
8.	Rough stone	V.Gunasekaran	S/o. Velliya Goundar, No. 47/1A, East Street, Tirukoilur	B/G&M/ 196/09 dt. 25.05.2009	1.50.0	19.06.2009	18.06.2019	-	-	22.06.2009	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4898/EC/1(a)/3392/2016 dated 25.07.2016	11°55'22.78"N to 11°55'26.97"N 79°09'25.55"E to 79°09'31.92"E (11°55'25.41"N 79°09'26.09"E)	Open cast
9.	Rough stone & Earth	R.Alagurajan	S/o.Ramaswamy, No.41, Erikaran Street, Nerkundram, Chennai-107.	A/G&M/263/13 dated 25.03.2015	1.46.5	25.03.2015	24.03.2020	-	-	04.05.2015	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1769/EC/1(a)/1631/2014 dated 19.02.2015	12°03'230"N to 12°03'27"N 79°40'31"E to 79°40'38"E (12°03'27.55"N 79°40'32.65"E)	Open cast
10.	Rough stone	Tmt.S.Nanthini	W/o.Sankar, No.14, 3rd Street, Jayapuram, Tindivanam Taluk	A/G&M/601/15 dated 31.12.2015	3.32.5	31.12.2015	30.12.2020	-	-	08.03.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4000/EC/1(a)/2546/2015 dated 21.12.2015	12°03'25.80"N to 12°03'33.90"N 79°40'05.88"E to 79°40'13.76"E (12°03'20.53"N 79°40'10.84"E)	Open cast
11.	Rough stone	G.Selvakumar	S/o.Govindaraj, Emapair Village, Kallakurichi Taluk	B/G&M/ 369/2017 dt. 08.10.2018	1.50.0	08.10.2018	07.10.2023	-	-	04.12.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.9072/EC No.16/2017, dated 04.02.2018	11°49'47"N to 11°49'51"N 78°58'13"E to 78°58'19"E (11°49'47"N 78°58'13"E)	Open cast

12.	Rough stone	R. Subramanian	S/o. Ramasamy, 15/3, Kattukottai, Emappair Post, Kallakurichi Taluk, Viluppuram District.	B/G&M/2018/10 dt. 16.12.2010.	1.96.0	10.01.2011	09.01.2021	-	-	25.01.2011	Non Working	Non Captive	-	11°53'01.58"N 79°03'39.54"E	Open cast
13.	Rough stone & Earth	C. Balamurugan	S/o.Chandran, Sannathi Street, Mailam Village, Tindivanam Taluk	B/G&M/398/2016 dt.24.09.2017	0.79.0	24.09.2017	23.09.2022	-	-	19.03.2018	Working	Non Captive	Yes, letter No.DEIAA-File No.DIA/TN/MIN/5779/2017/DEIAA/2017, dated 01.08.2017	12°07'55.50"N to 12°07'59.47"N 79°36'24.94"E to 79°36'28.56"E (12°07'56.09"N 79°36'24.94"E)	Open cast
14.	Rough stone	E. Sridhar	S/o Elumalai, No.1019, Pillaiyar Koil Street, Devikapuram Village, Arani Taluk, Tiruvannamalai District	B/G&M/23/10 dt. 10.05.2010	5.00.0	16.08.2010	15.08.2020	-	-	01.07.2011	Non Working	Non Captive	-	12°26'10.85"N to 12°26'03.38"N 79°21'48.29"E to 79°21'36.79"E (12°26'3.38"N 79°21'42.94"E)	Open cast
15.	Rough stone & Earth	C.Selvam,	S/o.Chellapa Mudaliyar, Sangeethamangalam Road, Anandapuram, Gingee Taluk.	B/G&M/1470/2013 dt.18.07.2014	0.60.0	18.07.2014	17.07.2019	-	-	07.01.2019	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2602/EC/1(a)/1454/2014 dated 25.06.2014	12°07'21"N to 12°07'27"N 79°22'40"E to 79°22'45"E (12°07'21"N 79°22'40"E)	Open cast
16.	Rough stone & Earth	A.S.Srinivasan	S/o.Sengodan, Athanur & Post, Rasipuram Taluk, Namakkal District.	B/G&M/459/13 dt. 06.02.2015	3.35.0	06.02.2015	05.02.2020	-	-	Nil	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1882/EC/1(a)/1459/2014 dated 02.07.2014	11°37'09"N to 11°37'01"N (78°55'02"E to 78°54'53"E)	Open cast
17.	Rough stone	A.Muthusamy	S/o. Arthanari Gounder, Kattukottai, Paranginathan, Malligaipady Post, Sankarapuram Taluk, Viluppuram	B/G&M/2012/10 dt. 31.12.2010.	1.00.0	14.02.2011	13.02.2021	-	-	21.07.2016	Non Working	Non Captive	-	-	Open cast

			District.												
18.	Rough stone & Earth	V.Sankar	S/o Vivekanandan, 14, Jayapuram Colony, Tindivanam Town & Taluk, Viluppuram District	A/G&M/300/2016 dated 20.09.2016	3.66.5	20.09.2016	19.09.2021	-	-	28.09.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5616/1(a)/EC.No.3694/2016 dated 06.09.2016	12°03'32"N to 12°03'40"N 79°40'16"E to 79°40'23"E (12°03'34"N 79°40'16"E)	Open cast
19.	Rough stone	A.Ramesh	S/o. Alangaramooper, Malaikottalam, Kallakurichi Taluk	B/G&M/2019/2010 dt. 03.07.2016.	2.00.0	03.07.2016	02.07.2026	-	-	31.01.2017	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2683/EC/1(a)/1739/2014 dated 13.03.2015	12°03'43"N to 12°03'50"N 78°57'08"E to 78°57'13"E (12°03.729'N 78°57.148"E)	Open cast
20.	Rough stone & Earth	V. Chandirasekaran	S/o. Vellaiyan, 2/4, School Street, Kattupaiyur Village, Tirukoilur Taluk.	B/G&M/334/2014 dt. 09.09.2016.	1.02.5	09.09.2016	08.09.2021	-	-	22.12.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4736/EC/1(a)/3196/2016 dated 11.07.2016	11°57'9.50"N to 11°57'14.14"N 79°10'16.12"E to 79°10'18.84"E (11°57'9.50"N 79°10'16.12"E)	Open cast
21.	Rough stone & Earth	P.Deivasigamani	S/o.Puttaiyan, T.Nallalam Village, Perumukkal Post, Tindivanam Taluk.	B/G&M/1898/12 dt.11.04.2015	1.03.0	11.04.2015	10.04.2020	-	-	26.05.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2831/EC/1(a)/1752/2014 dated 19.03.2015	12°11'51"N to 12°11'55"N 79°45'08"E to 79°45'15"E (12°11'54"N 79°45'8"E)	Open cast
22.	Rough stone	A.Balaraman	S/o.Aanaikutti Gounder, Keelsiviri Village & Post, Tindivanam Taluk, Viluppuram	B/G&M/ 365/11 dt. 25.11.2011.	1.10.0	26.12.2011	25.12.2021	-	-	27.01.2012	Non Working	Non Captive	No	12°11'35.31"N 79°45'29.14"E	Open cast

24

			District												
23.	Rough stone & Earth	T. Rajendiran	S/o Thandapani Naidu, 8/66, Siven Kovil Street, Elavanasurkottai Village &Post, Ulundurpet Taluk.	B/G&M/975/2015 dt. 22.08.2016.	1.97.5	22.08.2016	21.08.2021	-	-	28.09.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5148/EC/ 1(a)/3197/2016 dated 06.07.2016	11°39'59.60"N to 11°40'06.64"N 79°12'16.58"E to 79°12'22.80"E (11°39'59.60"N 79°12'18.64"E)	Open cast
24.	Rough stone & Earth	S.Arulkannan	S/o.Subramani, 252, Kulakkarai, Ulagalampoondi, Vikkiravandi Taluk	B/G&M/1059/2015 dt. 23.01.2017	1.14.5	23.01.2017	22.01.2022	-	-	25.01.2018	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5825/ 1(a) /EC.No. 3879/2016 dated 14.11.2016	12°02'42.84"N to 12°02'48.45"N 79°28'49.08"E to 79°28'52.37"E (12°02'43.45"N 79°28'49.08"E)	Open cast
25.	Rough stone & Earth	Tmt.R.Sujatha	W/o (late) L. Rameshbabu, No.5, Shankar Nagar, Thenpathi, Sirkali Taluk, Nagapattinam District	B/G&M/1053/2015 dt. 14.10.2016 & B/G&M/436/ 2018 Dated 19.11.2018	4.22.5	14.10.2016	13.10.2021	-	-	24.08.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5061/ 1(a) /EC.No. 3611/2016 dated 24.08.2016	11°40'02"N to 11°40'12"N 79°12'23"E to 79°12'35"E (11°40'03"N 79°12'24"E)	Open cast
26.	Rough stone & Earth	K.Paramasivam	S/o.Kanesa Gounder, No.290/5, Mariamman Koil Street, Chokkanthangal, Keelsiviri Post, Marakkanam Taluk	B/G&M/674/2015 dt.03.03.2016	1.06.5	03.03.2016	02.03.2021	-	-	04.05.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4827/ 1(a) /EC.No. 2829/2016 dated 17.02.2016	12°13'06"N to 12°13'11"N 79°45'26"E to 79°45'30"E (12°13'07"N 79°45'26"E)	Open cast
27.	Rough stone & Earth	E.Pavadaireyan	S/o.Ettiyappan, Mariyamman Kovil Street, Kovadi, Tindivanam Taluk.	B/G&M/1137/13 dt.14.05.2015	0.75.0	14.05.2015	13.05.2020	-	-	19.08.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3109/ EC/ 1(a)/ 2148/2014 dated 01.04.2015	12°11'39"N to 12°11'43"N 79°45'10"E to 79°45'14"E (12°11'40"N 79°45'10"E)	Open cast

28.	Rough stone	S.Srinivasan	S/o.Sanjeevi, No.9, Wahab Nagar, Manakkanam Road, Tindivanam Taluk.	B/G&M/2005/10dt. 23.09.2014	0.72.0	23.09.2014	22.09.2019.	-	-	02.12.2009	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1862 / EC/ 1(a) / 1139A/2013 dated 27.02.2014	12°12'24"N to 12°12'19"N 79°44'55"E to 79°44'59"E (12°12'19"N 79°44'55"E)	Open cast
29.	Rough stone & Earth	P.Srinivasan	S/o. Pattabi Reddiyar, No.142, Mosque Street, C.Pallavaram, Chennai	B/G&M/290/13 dt.13.11.2015	1.61.5	13.11.2015	12.11.2020	-	-	29.06.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2951 / EC/ 1(a) / 1768/2014 dated 19.03.2015	12°13'58"N to 12°14'03"N 79°45'17"E to 79°45'23"E (12°13'58"N 79°45'20"E)	Open cast
30.	Rough stone & Earth	M. Krishnamoorthi	S/o.Murugaiyan, No.1, Palayakara Street, Thiruvakkarai.	A/G&M/422/2013 dated 15.10.2016	0.80.0	15.10.2016	14.10.2021	-	-	22.03.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5424 / 1(a) / EC.No. 3557/2016 dated 10.08.2016	12°2'23.90"N to 12°2'27.58"N 79°39'32.17"E to 79°39'35.05"E (12°2'24.38"N 79°39'32.17"E)	Open cast
31.	Rough stone & Earth	A.Selvaraj	S/o.Arunugam, No.135, 7th Cross Road, Housing Board, Gopalapuram, Manoor Village, Tindivanam Taluk, Viluppuram District.	B/G&M/1187/13 dt.24.04.2015	1.07.5	24.04.2015	23.04.2020	-	-	18.05.2015	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2779 / EC/ 1(a) /1747/2014 dated 13.03.2015	12°13'22"N to 12°13'28"N 79°44'03"E to 79°44'07"E (12°13'22""N 79°44'04"E)	Open cast
32.	Rough stone & Earth	G.AnandKumar Jain	S/o.Gajraj Jain, No.5, Radhakrishna Street, Venkatta Nagar, Pondicherry	A/G&M/528/08 dated 16.03.2015	1.05.5	16.03.2015	15.03.2020	-	-	13.04.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1206 / EC/ 1(a) /1244/2013 dated 08.05.2014	12°02'00"N 79°38'52"E	Open cast
33.	Rough stone & Earth	T.Aravindan	S/o.Tinakaran, Perummukkal Village, Tindivanam Taluk	B/G&M/693/2012 dt.08.02.2016	2.12.0	08.02.2016	07.02.2021	-	-	30.10.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2763 / EC/ 1(a) /1738/2014 dated 13.03.2015	12°13'15"N to 12°13'09"N 79°45'22"E to 79°45'16"E (12°13'12"N 79°45'16"E)	Open cast

34.	Rough stone	S.Raguraman	S/o.Subramaniyan, 8, Mettu Street, Eraiyur Village & Post, Vanur Taluk, Viluppuram District.	A/G&M/590/2013 dated 20.02.2016	1.13.0	20.02.2016	19.02.2021	-	-	10.03.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4512/EC/1(a)/2778/2015 dated 19.01.2016	12°02'10.25"N to 12°02'14.44"N 79°38'52.17"E to 79°38'59.91"E (12°02'10.25"N 79°38'52.17"E)	Open cast
35.	Rough stone & Earth	M.Kaliyarasi	W/o. Manokaran, 4/53, Mariyamman Kovil Street, Sivanthangal, Chennai-69.	A/G&M/1461/2013 dated 14.06.2016	2.57.5	14.06.2016	13.06.2021	-	-	06.03.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3101/EC/1(a)/1804/2014 dated 27.03.2015	12°04'31"N to 12°04'43"N 79°38'54"E to 79°38'59"E (12°04'32"N 79°38'57"E)	Open cast
36.	Rough stone & Earth	C.Ganesan	S/o.Chinnaiya Gounder, 168, Mettu Street, Karasanur Village, V.Parangani Post, Vanur Taluk	A/G&M/168/2015 dated 22.08.2016	4.27.5	22.08.2016	21.08.2021	-	-	15.12.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5069/EC/1(a)/3326/2016 dated 15.07.2016	12°03'20"N to 12°03'27"N 79°39'58"E to 79°40'10"E (12°03'20"N 79°39'58"E)	Open cast
37.	Rough stone & Earth	V.Gnanaguru,	S/o. Velayutham, Elavalapakkam Village, Perumukkal, Tindivanam Taluk	B/G&M/1207/2012 dt.21.06.2014	1.28.0	21.06.2014	20.06.2019	-	-	29.04.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2327/EC/1(a)/1251/2014 dated 09.05.2014	12°13'37"N to 12°13'32"N 79°44'11"E to 79°44'15"E (12°13'33"N 79°44'11"E)	Open cast
38.	Rough stone & Earth	T.Kuppusamy	S/o.Thoppalan No.667, Marakkanam Road, Brammadesam Village, Tindivanam Taluk	B/G&M/531/14 dt.31.12.2015	0.99.5	31.12.2015	30.12.2020	-	-	26.02.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3365/EC/1(a)/2338/2015 dated 02.11.2015	12°11'43"N to 12°11'49"N 79°45'39"E to 79°45'42"E (12°11'47"N 79°45'39"E)	Open cast
39.	Rough stone	D. Murugapandiyan	S/o. Dharmaraj, Chokkanandhandal, Gingee Taluk.	B/G&M/2008/10 dt. 30.12.2016.	2.00.0	30.12.2016	29.12.2021	-	-	21.08.2017	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5048/EC/1(a)/3722/2016 dated 16.09.2016	12°15'17"N to 12°15'20"N 79°27'02"E to 79°27'11"E (12°15'17"N 79°27'02"E)	Open cast

40.	Rough stone	Tmt R. Dhanalaksmi	W/o. Ravi, Throwpathiamman Koil Street, Vembi Village and Post, Viluppuram Taluk and District	B/G&M/205/2010 dt. 13.04.2010	3.00.0	07.06.2010	06.06.2020	-	-	11.06.2010	Working	Non Captive		12°07'55.87"N 79°26'40.90"E	Open cast
41.	Rough stone	R. Dhanalakshmi,	W/o.J.Ravi, Throwpathiamman Kovil Street, Vembi Village, Viluppuram Taluk.	B/G&M/2001/2010 dt. 31.08.2016	2.21.5	31.08.2016	30.08.2021	-	-	06.03.2017	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1424 / EC/ 1(a) /637/2013 dated 01.08.2013	12°02'51.37"N to 12°02'57.60"N 79°27'50.49"E to 79°27'57.29"E (12°02'57"N 79°27'55"E)	Open cast
42.	Rough stone	K. Murugavel	S/o. Kali Gounder, Nangathur Village, Anniyur Via, Viluppuram Taluk.	B/G&M/2000/10 dt. 16.12.2010.	0.50.0	31.01.2011	30.01.2021	-	-	26.12.2011	Non Working	Non Captive	No	12°07'36.16"N 79°24'43.73"E	Open cast
43.	Rough stone	P. Elanchezhiyan	S/o. Panneerselvam, Vadakkanathal post, Kallakurichi Taluk, Viluppuram District	B/G&M/198/09 dt.25.05.09	2.00.0	23.06.2009	22.06.2019	-	-	10.05.2010	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4872 / 1(a) / EC.No.3486/2016 dated 29.07.2016	11°45'23.82"N to 11°45'27.08"N 78°51'24.54"E to 78°51'31.13"E (11°45'23.82"N 78°51'24.54"E)	Open cast
44.	Rough stone	V.Ravi	S/o.Veerasamy, Perumukkal Village, Tindivanam Taluk.	B/G&M/2003/10 dt. 23.09.2014.	0.37.5	23.09.2014	22.09.2019	-	-	01.02.2019	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1757 / 1(a) / EC.No.866/2013 dated 12.11.2013	12°13'19"N to 12°13'16"N 79°46'07"E to 79°46'04"E (12°13'16"N 79°46'06"E)	Open cast
45.	Rough stone	P.Ravichandiran	S/o.Periyasamy, 1/13, Throwpathiamman Kovil Street, Thiruvakkarai Village, Vanur Taluk, Viluppuram District.	A/G&M/513/13 dated 30.05.2014	1.42.5	30.05.2014	29.05.2019	-	-	27.06.2014	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1962 / EC/1(a) 1192/2013 dated 15.04.2014	12°01'52"N to 12°01'49"N 79°38'54"E to 79°39'01"E (12°01'52"N 79°38'55"E)	Open cast

88

46.	Rough stone & Earth	K. Gnanasekaran	S/o.Kannadi counder, Mettu Street, Karasanur Village, Vanur Taluk, Villupuram District.	A/G&M/483/2013 dated 24.09.2017	1.24.5	24.09.2017	23.09.2022	-	-	13.12.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3425 / 1(a) / EC.No.3920/2016 dated 19.06.2017	12°03'36"N to 12°03'40"N 79°40'07"E to 79°40'12"E (12°03'324.73" N 79°40'15.44"E	Open cast
47.	Rough stone	D.Narayanaswamy	S/o.Dachinamoorthy, 25, Enikaran Street, Mariyamman Kovil Street, Cuddalore District.	A/G&M/702/2017 dt. 27.08.2018	2.53.0	27.08.2018	26.08.2023	-	-	18.09.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.12681 / EC.No.11/2018 dated 05.07.2018	12°05'51"N to 12°06'00"N 79°42'32"E to 79°42'40"E (12°05'55"N 79°42'32"E)	Open cast
48.	Rough stone & Earth	M.Jaffer sait	S/o. Mohamed Ravuthar, Panayapuram Village, Viluppuram Taluk.	B/G&M/848/2016 dt. 27.09.2018.	1.55.0	27.09.2018	26.09.2023	-	-	22.10.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7427 / EC.No.14/2017 dated 04.02.2018	11°39'53.90"N to 11°40'00.33"N 79°12'18.51"E to 79°12'23.14"E (11°39'55.69"N 79°12'18.51"E)	Open cast
49.	Rough stone	T.Anbazhagan	S/o.Thangavel, Nathamedu Street, Olakoor & Post, Tindivanam Taluk, Viluppuram District	B/G&M/364/17 dt. 28.02.2019.	0.99.0	28.02.2019	27.02.2024	-	-	Nil	Non Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.8096 / EC.No.31/2017 dated 04.12.2018	12°13'36.27"N 79°44'16.52"E	Open cast
50.	Rough stone	A. Sathishkumar	S/o Arumugam, Mettu Street, Thuruvai, Ravapudupakkam Post, Vanur Taluk	B/G&M/1142/2017 dt. 08.03.2019.	1.00.0	08.03.2019	07.03.2024	-	-	Nil	Non Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15706 / EC.No.12/2018 dated 04.12.2018	12°01'48"N to 12°01'54"N 79°38'49"E to 79°38'55"E (12°01'49.67"N 79°38'54.89"E)	Open cast
51.	Rough stone	C. Prabu	S/o. Chakravarthi, Indira Nagar, Kiliyanur Village & Post, Vanur Taluk, Viluppuram	B/G&M/1141/2017 dt. 08.03.2019.	1.00.0	08.03.2019	07.03.2024	-	-	09.05.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15708 / EC.No.13/2018 dated 04.12.2018	12°01'49"N to 12°01'55"N 79°38'51"E to 79°38'55"E (12°01'49.40"N 79°38'53.69"E)	Open cast

52.	Rough stone & Earth	S. Ranganathan	S/o. Subramania Gounder, No.135, Pondy Road, Manikkanam, Viluppuram District.	B/G&M/260/15 dt.15.02.2019	2.13.0	15.02.2019	14.02.2024	-	-	08.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18539 / EC.No.22/2018 dated 04.12.2018	12°11'27.47"N to 12°11'34.31"N 79°45'41.19"E to 79°45'46.59"E (12°11'29.96"N 79°45'41.19"E)	Open cast
53.	Rough stone	H. Chinnakannan	S/o. Harikrishnan, Eraiyur Village, Vanur Taluk, Viluppuram District	A/G&M/362/2017 dated 28.02.2019	2.81.5	28.02.2019	27.02.2024	-	-	08.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7699 / EC.No.7/2017 dated 04.02.2018	12°04'07"N to 12°04'14"N 79°39'32"E to 79°39'41"E	Open cast
54.	Rough stone & Earth	S. Raguraman	S/o. Subramaniya Reddiyar, Thenkodipakkam Village, Vanur Taluk, Viluppuram District.	A/G&M/778/2017 dt.15.02.2019	2.54.5	15.02.2019	14.02.2024	-	-	28.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15201 / EC.No.14/2018 dated 05.07.2018	12°08'33"N to 12°08'40"N 79°43'28"E to 79°43'36"E (12°08'37.02"N 79°43'28.16"E)	Open cast
55.	Rough stone & Earth	M.Babu	No.2, Mailam Road, Indira Nagar, Tindivanam	B/G&M/1159/2017 dt.09.08.2018	3.94.0	09.08.2018	08.08.2023	-	-	19.08.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15483 / EC.No.17/2018 dated 05.07.2018	12°13'13.96"N to 12°13'24.92"N 79°46'15.51"E to 79°46'22.51"E (12°13'16.44"N 79°46'16.04"E)	Open cast
56.	Rough stone	Manikkam	S/o.Kali, Nangathur Village, Vikkiravandi Taluk, Villupuram District.	B/G&M/363/17 dt. 08.03.2018	1.00.0	08.03.2018	07.03.2023	-	-	15.03.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7527 / EC.No.13/2017 dated 04.02.2018	12°07'34"N to 12°07'37"N 79°24'44"E to 79°24'50"E (12°07'34"N 79°24'44"E)	Open cast
57.	Rough stone & Earth	D.Ramesh	S/o.Devaraj Perumukkal Village & Post, Manikkanam Taluk, Viluppuram District	B/G&M/100/2018 dt.28.02.2019	1.76.0	28.02.2019	27.02.2024	-	-	16.05.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18540 / EC.No.23/2017 dated 04.12.2018	12°11'07.87"N to 12°11'11.80"N 79°45'42.90"E to 79°45'51.85"E	Open cast

														(12°11'09.72"N 79°45'42.90"E)	
58.	Rough stone & Earth	R.Muralidaran	Manager, OM sakthi Constructions, Thollamur Village, Vanur Taluk.	A/G&M/1048/2017 dt..16.08.2018	2.06.0	16.08.2018	15.08.2023	-	-	31.08.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.14175 / EC.No.13/2018 dated 05.07.2018	12°03'28"N to 12°03'36.50"N 79°40'35.29"E to 79°40'39.92"E (12°03'29.79"N 79°40'35.29"E)	Open cast
59.	Rough stone & Earth	G.Raja,	S/o. Gopal, Sivaraj Street, Thirunoermalai, Chennai.	A/G&M/90/2018 dt..16.08.2018	2.42.5	16.08.2018	15.08.2023	-	-	Nil	Non Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15627 / EC.No.18/2018 dated 05.07.2018	12°03'13.14"N to 12°03'21.15"N 79°40'16.66"E to 79°40'24.21"E (12°03'17.09"N 79°40'16.66'E)	Open cast
60.	Rough stone	T.Vasudevan	S/o. Thangavel, Erniyur Village, Vanur Taluk, Villupuram District.	A/G&M/181/2018 dt.15.02.2019	4.83.5	15.02.2019	14.02.2024	-	-	06.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18345 / EC.No.19/2018 dated 04.12.2018	12°04'09"N to 12°04'19"N 79°38'34"E to 79°38'45"E (12°04'16.98"N 79°38'34.04"E)	Open cast
61.	Rough stone	S. Sankar	S/o. Sampantham, S. Kollur Village, Kandachipuram Taluk, Villupuram District.	B/G&M/366/17 dt. 08.03.2018.	3.00.0	28.03.2018	27.03.2023	-	-	04.06.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.8297 / EC.No.10/2017 dated 04.02.2018	11°58'25"N to 11°58'32"N 79°14'24"E to 79°14'33"E (11°58'25"N 79°14'26'E)	Open cast
62.	Rough stone	S. Revathi	W/o. Selvaraj B1, Krishna Apartment, Kavarai Village, Kallakurchi.	B/G&M/365/17 dt. 08.03.2018.	2.16.0	13.03.2018	12.03.2023	-	-	28.03.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7596 / EC.No.12/2017 dated 04.02.2018	12°11'48.13"N 79°45'16.40"E	Open cast
63.	Rough stone & Earth	D. Manokar	S/o. Dhamothiran, Anna Nagar, Erniyur Village, Vanur Taluk.	A/G&M/176/2018 dt.15.02.2019	1.90.5	15.02.2019	14.02.2024	-	-	03.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18212 / EC.No.18/2018 dated 04.12.2018	12°03'46"N to 12°03'53"N 79°38'28"E to 79°38'33"E (12°03'47.31"N 79°38'29.29'E)	Open cast

64.	Rough stone	G. Tamilselvan	S/o. (late) M. Ganesan, Gounder, Melmampattu Village, Melmalayanur Post, Gingee Taluk.	B/G&M/193/09 Dt. 03.09.09, & B/G&M/950/2017 Dt. 09.08.2018	0.81.0	12.10.2009	11.10.2019	-	-	06.02.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18587/EC.No.26/2018 dated 04.12.2018	12°20'20.51"E to 12°20'20.04"E 79°20'40.65"N to 79°20'48.88"N (12°20'20.13"E 79°20'40.65"N)	Open cast
65.	Rough stone & Earth	K.Balamurugan	S/o.Kuppusamy, Karasanur & Post, Vanur Taluk.	A/G&M/138/2017 dt..27.08.2018	2.12.0	27.08.2018	26.08.2023	-	-	13.11.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15355/EC.No.15/2018 dated 05.07.2018	12°03'18"N to 12°03'26"N 79°40'05"E to 79°40'10"E (12°03'18"N 79°40'06"E)	Open cast
66.	Rough stone & Earth	E. Jayasankar	S/o. Elumalai, No.198, Vinayakar Koil Street, Eraiyur Village, Vanur Taluk, Viluppuram District	A/G&M/180/2018 dt.15.02.2019	3.37.5	15.02.2019	14.02.2024	-	-	06.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18349/EC.No.20/2018 dated 04.12.2018	12°04'02"N to 12°04'13"N 79°38'35"E to 79°38'42"E (12°04'03.46"N 79°38'35.07"E)	Open cast
67.	Rough stone & Earth	K. Mujeepur Ragman	S/o. Kalipulla Salam Main Road, Elavanasurkottai, Ulundurpet.	B/G&M/174/2015 dt. 10.10.2017.	1.40.5	10.10.2017	09.10.2022	-	-	07.12.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5134/I(a)/EC.No.3912/2016 dated 07.06.2017	11°39'48"N to 11°39'54"N 79°12'17"E to 79°12'22"E 11°39'496"N 79°12'18"E	Open cast
68.	Rough stone & Earth	M. Moorthi	S/o. Munian, Mannarsamy Kovil Street, Tiruvakkarai Village, Vanur Taluk.	A/G&M/203/2018 dt.15.02.2019	3.93.5	15.02.2019	14.02.2024	-	-	14.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18543/EC.No.24/2018 dated 04.12.2018	12°2'42.77"N to 12°2'53.80"N 79°39'50.80"E to 79°39'57.78"E (12°2'46.77"N 79°39'50.80"E)	Open cast
69.	Rough stone & Earth	N. Venkatesh	S/o. Nataraj, No.158, Kurinji Nagar, Vellisemmandalam, Cuddalore.	B/G&M/1013/2017 dt.30.02.2019	2.30.5	30.02.2019	29.02.2024	-	-	20.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.17579/EC.No.17/2018 dated 04.12.2018	12°13'32"N to 12°13'38"N 73°44'15"E to 73°44'51"E (12°13'32"N 73°44'15"E)	Open cast
70.	Rough stone & Earth	V.Sadaiyappan	No.18, Amal Nagar, West Tambaram,	A/G&M/95/2018 dt..16.08.2018	2.30.5	16.08.2018	15.08.2023	-	-	18.09.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15429/	12°13'331.97"N to 12°03'41.75"N 79°40'06.13"E to	Open cast

			Chennai-600 045.										EC.No.16/2018 dated 05.07.2018	79°40'16.50"E (12°03'32.44"N 79°40'06.13"E)	
71.	Rough stone & Earth	S. Thirumurugan	S/o. Sivaprakasam, Vinayagar Kovil Street, Kathirkamam, Puducherry.	A/G&M/269/2018 dt.15.02.2019	2.92.0	15.02.2019	14.02.2024	-	-	22.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18382/ EC.No.21/2018 dated 04.12.2018	12°02'30"N to 12°02'38"N 79°38'33"E to 79°38'40"E (12°02'31.21"N 79°38'34.83"E)	Open cast
72.	Rough stone & Earth	V.Nagaraj	S/o. Vaiyapuri, No.3/32A, South Street, Okaiyur Post, Kallkurichi Taluk, Viluppuram District.	B/G&M/118/2018 dt. 25.01.2019.	1.36.5	25.01.2019	24.01.2024	-	-	25.02.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.17233/ EC.No.14/2018 dated 04.12.2018	11°39'40.39"N to 11°039'46.71" N 79°11'58.95"E to 79°12'05.54"E (12°02'31.21"N 79°38'34.83"E)	Open cast
73.	Rough stone & Earth	D.Selvakumar,	S/o.Dandapani, Mailam Village, Tindivanam Taluk.	B/G&M/70/2014 dt.17.07.2014.	1.08.0	17.07.2014	16.07.2019	-	-	16.02.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2639/ EC/1(a)/1391/20 14 dated 25.06.2014	12°07'50"N to12°07'55"N 79°36'24"E to 79°36'28"E (12°07'51"N 79°36'24"E)	Open cast
74.	Rough stone	N. Elangovan,	S/o. Nachiyappan, Devapandalam Village, Sankarapuram Taluk.	B/G&M/200/09 Dt. 27.05.2009	3.00.0	07.09.2009	06.09.2019	-	-	29.09.2009	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4757/ 1(a)/EC.No.3281 /2015 dated 11.07.2016	11°56'52.79"N to11°56'59.55" N 78°52'47.46"E to 78°52'59.26"E (11°56'52.79"N 78°52'52.26"E)	Open cast
75.	Rough stone	K. Arjunan,	S/o. Kuppusamy Gr., Malaiyarasankuppa m Village, Mazhavanthangal Post, Gingee taluk, Viluppuram District	B/G&M/24 /2010 dt. 18.02.2010	1.50.0	12.07.2010	11.07.2020.	-	-	17.12.2012	Non Working	Non Captive	No	12°05'55.99"N 79°17'11.65"E	Open cast
76.	Rough stone	D.Ramachandran	S/o. Duraisamy, Thimmanandal Village, Arur post, Sankarapuram Taluk.	B/G&M/199/09 dt. 27.05.09	3.00.0	31.08.2009	30.08.2019	-	-	16.09.2009	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4725/ 1(a)/EC.No.3331 /2016 dated 15.07.2016	11°56'0.09"N to11°56'59.94" N 78°51'57.68"E to 78°52'01.04"E	Open cast

															(11°56'0.09"N 78°51'57.68"E)	
77.	Rough stone	A. Sivanandham,	S/o. Anbuzhagan, Mettu Street, Vadanerkunam post, Tindivanam Taluk.	B/G&M/185/09 Dt. 11.06.2009	1.64.0	24.08.2009	23.08.2019	-	-	12.10.2009	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4826 / 1(a)/EC.No.3347 /2016 dated 15.07.2016	12°13'08"N to 12°13'14"N 79°45'57"E to 79°46'03"E (12°13'10"N 79°45'57"E)	Open cast
78.	Rough stone	Tmt.Saithanebee	W/o. K.S. Masthan, 59, Desurpattai Salai, Krishnapuram, Gingee, Viluppuram District	B/G&M/200/10 dt. 25.01.2011.	3.00.0	28.02.2011	27.02.2021	-	-	30.06.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2484 / 1(a)/EC.No.3590 /2015 dated 19.08.2016	12°26'16"N to 12°26'21"N 79°23'05"E to 79°23'11"E	Open cast
79.	Rough stone	P. Ramalingam,	S/o. Perumal, Palliyandur village Viluppuram Taluk Viluppuram District.	B/G&M/207/10 dt. 12.05.2010.	3.72.0	16.08.2010	15.08.2020.	-	-	17.09.2010	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18617 / 1(a)/EC.No.28/2 018 dated 04.12.2018	12°11'36.91"N 79°45'21.21"E	Open cast
80.	Rough stone	Tmt. K. Parimala	W/o. Senthamil Selvan, Murugan Koil Street, Kalathumpattu Post, Gingee Taluk, Viluppuram District	B/G&M/25 /2010 dt. 30.03.2010	2.50.0	16.04.2010	15.04.2020	-	-	23.04.2010	Non Working	Non Captive	No	12°13'25.45"N 79°18'46.08"E	Open cast
81.	Rough stone & Earth	V.Kumar	S/o. Velayutham, Elavalapakkam Village, Perumukkal, Tindivanam Taluk.	B/G&M/961/2012 dt.21.06.2014	2.33.0	21.06.2014	20.06.2019	-	-	21.07.2014	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2328 / EC/. 1(a)/ 1337/2014 dated 30.05.2014	12°14'54"N to 12°14'46"N 79°44'48"E to 79°44'41"E (12°14'46"N 79°44'45"E)	Open cast
82.	Rough stone & Earth	Tmt.L.Savithri	W/o.Loganathan, Eraiyur Village & post, Vanur taluk.	A/G&M/360/13 dated 30.05.2014	0.99.0	30.05.2014	29.05.2019	-	-	12.06.2014	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1650 / EC/ 1(a)/ 1169/2013 dt. 20.03.2014	12°04'05"N to 12°04'08"N 79°39'33"E to 79°39'40"E (12°04'6"N 79°39'33"E)	Open cast
83.	Rough stone	S. Kamsaladevi	W/o. Surasingh, Eyyil Village & post, Gingee Taluk, Viluppuram District.	B/G&M/192/09 dt. 11.06.2009.	3.00.0	23.06.09	22.06.2019	-	-	18.03.2010	Non Working	Non Captive	No	12°24'38.17"N 79°22'26.58"E	Open cast

84.	Rough stone	B. Sakthivel	S/o. Balasubramaniyan Vadakurumbur, Ulundurpet Taluk, Villupuram District	B/G&M/367/17 dt.08.03.2018.	2.94.0	08.03.2018	07.03.2023	-	-	12.03.2018	Working	Non Captive	Yes, letter No.DIA/TN/MIN/ 6526/2017/DEIAA 2017,Ec.No.1, Dated:01.08.201 7	11°39'37"N to 11°39'44"N 79°12'09"E to 79°12'15"E (11°39'37"N 79°12'10"E)	Open cast
85.	Rough stone	K.Ashokkumar	S/o.Kandasamy, Nallalam Kootroad, Perumukkal Village, Tindivanam Taluk.	B/G&M/1224/12 dt.16.04.2015	0.95.0	16.04.2015	15.04.2020	-	-	23.10.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2677 / EC/ 1(a)/ 1546/2014 dated 14.08.2014	12°13'13"N to 12°13'08"N 79°46'36"E to 79°46'44"E	Open cast

10) Details of Revenue received in last three years;

Year	Rough Stone S.F. (Rs.)
2016-17	46173110
2017-18	44466900
2018-19	54766668

11) Details of Production of Minor Mineral in last three years.

Year	Rough Stone Production (in Cu.Mt)
2016-17	1018368
2017-18	939555
2018-19	932678

MINERAL MAP OF VILLUPURAM DISTRICT

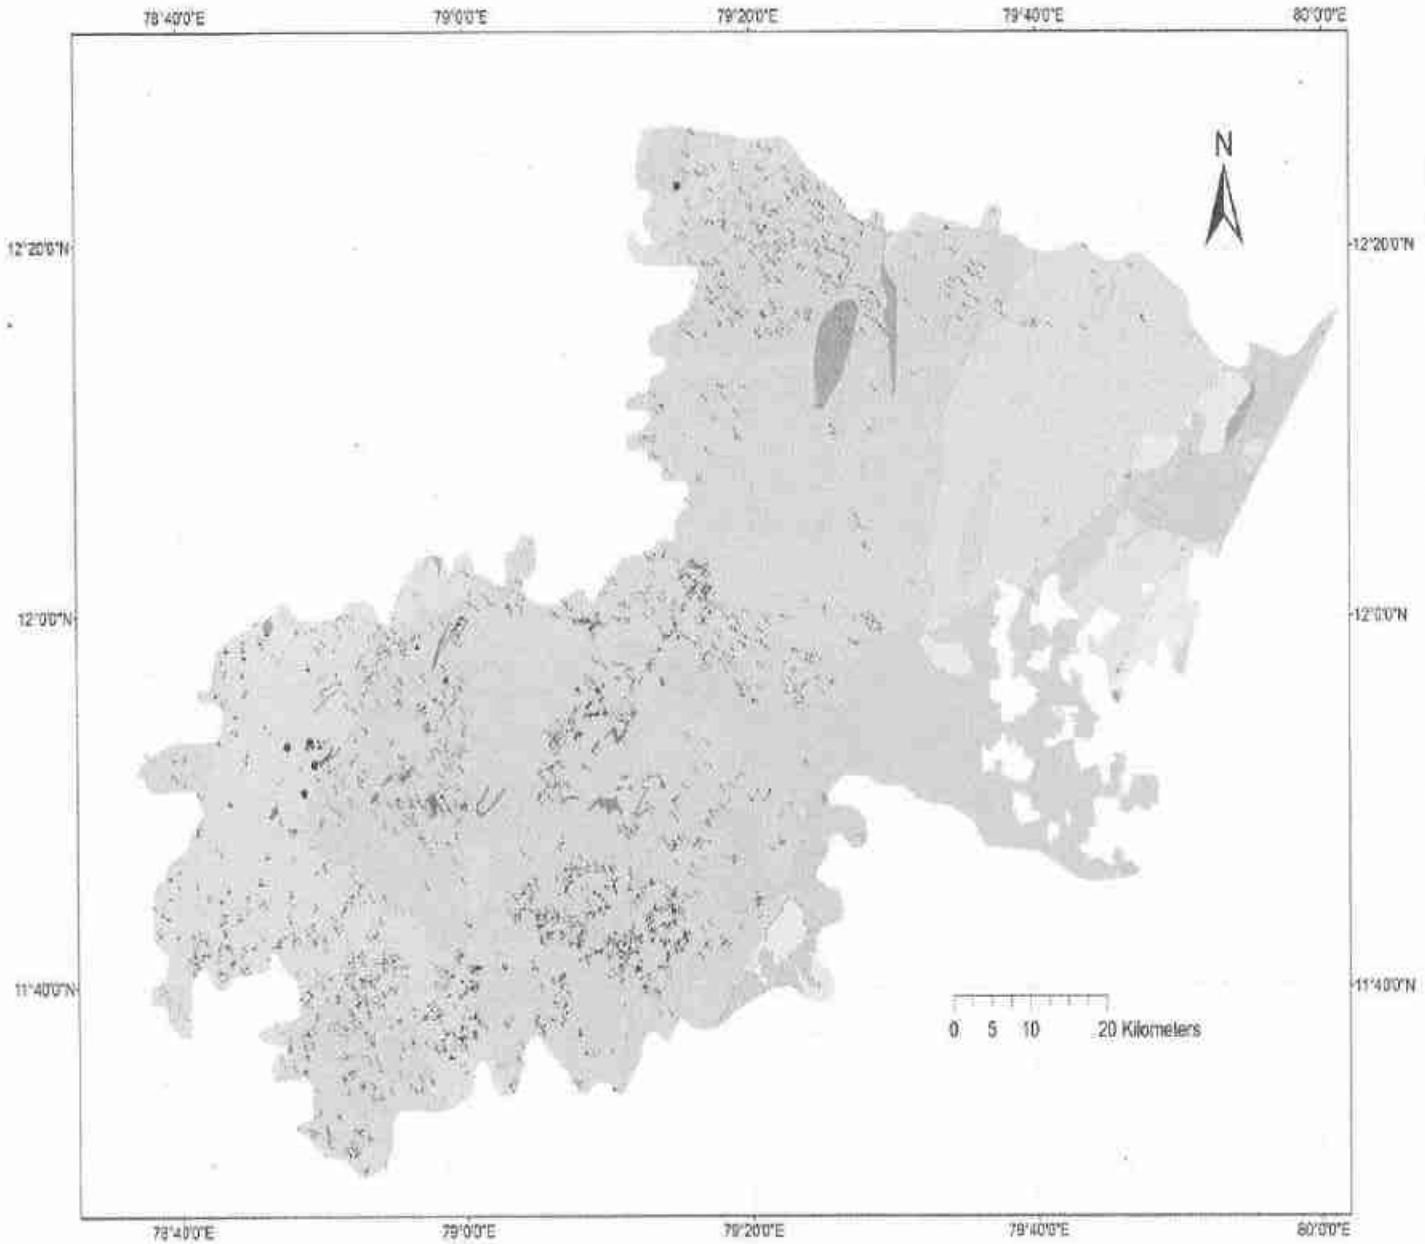

Legend

Group/Formation	Age
Tiruchendur (Younger)	Quaternary
East Coast	Quaternary
Ponnaiyar	Quaternary
Palar	Quaternary
Cuddalore	Mio-Pliocene
Pondicherry	Lower Paleocene
Vriddhachalam	Upper Cretaceous
Lower Gondwana	Lower Cretaceous
Acid intrusives	Neo Proterozoic
Epidote hornblende gneiss	Neo Proterozoic
Peninsular Gneissic Complex-II	Archaean to Paleo Proterozoic
Charnockite	Archaean
Khondalite	Archaean
Sittampundi-Mettupalaiyam Complex	Archaean
Satyamangalam	Archaean

Mineral Symbols

- Clay
- Dimension Stone
- Iron Ore
- Limeshell
- Polymetallic Base Metal
- Pyrite
- Building Material

Structurall Symbols

- FOLIATION
- JOINT
- JOINT-VERTICAL
- LINEATION
- FOLIATION-VERTICAL

13. List of Letter of Intent (LOI) Holders in the District along with its validity:-

Sl. No.	Name of the Mineral	Name of the Lessee	Address & Contact No. of letter of Intent Holder	Letter of Intent Grant Order No. & Date	Area of Mining lease to be allotted	Validity of LoI	Use (Captive/ Non-Captive)	Location of the Mining Lease (Latitude& Longitude)
1	2	3	4	5	6	7	8	9
1.	Rough stone & Gravel	V.Ramesh	S/o. Venkatapathy, No.5, Thangaraj Street, HLL Colony, Pammal, Chennai – 75.	B/G&M/463/2018 dt.18.01.2019	3.53.0	-	Non Captive	12°03'10.49"N to 12°03'20.70"N 79°40'08.70"E to 79°40'16.98"E (12°03'11.13"N 79°40'09.94"E)
2.	Rough stone & Earth	Santhosh Blue Metals, Prop. S.V. Venkatesh	No.173, Sarkar Thoppu, Tindivanam.	B/G&M/357/2018 dt.04.01.2019	2.06.0	-	Non Captive	12°03'30"N to 12°03'36"N 79°40'23"E to 79°40'30"E (12°03'33"N 79°40'23"E)
3.	Rough stone & Earth	D. Dhandapani	S/o. Duraisamy, Eraiyur Village, Vanur Taluk, Viluppuram District.	B/G&M/423/2018 dt.18.01.2019	1.49.5	-	Non Captive	12°04'07.16"N to 12°04'13.93"N 79°38'59.73"E to 79°39'03.75'E (12°04'07.45"N 79°39'00.95"E)
4.	Rough stone & Earth	Sri Balaji Blue Metals & M.Sand	No.33/8, Mailam Road, Indira Nagar, Tindivanam	B/G&M/462/2018 dt.15.02.2019	2.85.5	-	Non Captive	12°13'05.47"N to 12°13'13.31"N 79°47'04.29"E to 79°47'10.26"E (12°13'06.53"N 79°47'04.83"E)
5.	Rough stone	K. Balasubramanian	S/o. Karuppaiya, 28/4B, Raja Nagar, Kallakurichi – 606 202.	B/G&M/1143/2017 dt.17.01.2018	2.00.0	-	Non Captive	12°03'41.93"N to 12°03'48.98"N 78°57'09.17"E to 78°57'15.01"E (12°13'43.97"N 78°57'09.17"E)

6.	Rough stone & Gravel	A.Aridass	School Street, Kadagampattu, Vanur Taluk, Viluppuram District.	A/G&M/337/2018 dt.30.01.2019	1.77.0	-	Non Captive	12°03'55.01"N to 12°04'01.91"N 79°38'24.85"E to 79°38'32.27"E (12°03'56.29"N 79°38'24.85"E)
7.	Rough stone & Earth	K.Gnanasekaran	S/o.Kannadi Gounder, Karasanur Village, Vanur Taluk, Viluppuram District.	A/G&M/277/2018 dt.04.01.2019	2.68.0	-	Non Captive	12°03'20.03"N to 12°03'27.36"N 79°40'15.44"E to 79°40'23.75"E (12°03'24.73"N 79°40'15.44"E)

14. Mineral Reserve :
Name of the Mineral: Rough stone

Sl. No	Name of the Mineral	Name of the Lessee	Address & Contact No. of Lessee	Mining lease grant order No. & Date	Area of Mining lease (ha)	Period of Mining lease (Initial)		Period of Mining lease (1st / 2nd renewal)		Date of commencement of Mining Operation	Status (Working / Non Working / Temp working for dispatch etc.)	Captive / Non-Captive	Obtained Environmental Clearance (Yes/No) If Yes Letter no with date of grant of EC	Location of the Mining Lease (Latitude & Longitude)	Total Quantity in CBM
						From	To	From	To						
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1.	Rough stone	T.Mutharnizhan	S/o.Thennavan, Manalur Village, Sankarapuram Taluk, Viluppuram District.	B/G&M/ 2020/2010 dt. 31.08.2016.	1.50.0	31.08.2016	30.08.2021	-	-	06.02.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2682/EC/1(a)/1724/2014 dated 13.03.2015	12°00'30"N to 12°00'26"N 78°55'28"E to 78°55'23"E (12°00'27.7"N 78°55'21.8"E)	RS:45305
2.	Rough stone	RSubramanian	S/o. Ramasamy, 15/3, Kattukottai Village, Yemapair Post, Kallakurichi Taluk, Viluppuram District.	B/G&M/371/11 dt. 26.11.2011	1.20.0	23.01.2012	22.01.2022	-	-	Nil	Non working	Non Captive	No	11°50'21.78" N 79°07'10.61"E	RS:67289
3.	Rough stone	K.Natchiappan	S/o.Karuppanna Gounder, Vellakulam, Keelsiviri Post, Tindivanam Taluk.	B/G&M/1213/13 dt.31.12.2015	2.23.0	31.12.2015	30.12.2020	-	-	25.02.2016	Non working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3439/EC/1(a)/2547/2015 dated 21.12.2015	12°11'56"N to 12°11'46"N 79°45'33"E to 79°45'26"E (12°11'47"N 79°45'29"E)	RS:85355
4.	Rough stone	K. Shanmugam	S/o Kannaiya Gounder, Nallavur Village & Post, Vanur Taluk, Viluppuram District.	A/G&M/522/2014 dated 09.09.2016	1.95.5	09.09.2016	08.09.2021	-	-	Nil	Non working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4167/EC/1(a)/3177/2015 dated 21.03.2016	12°08'58.60"N to 12°09'04.64"N 79°44'38.34"E to 79°44'54"E (12°09'04.63"N 79°44'38.34"E)	RS:27417
5.	Rough stone & Earth	K.Anandavelu	S/o. Kesavan, No.96, Eraiyur Village, Vanur Taluk, Viluppuram District	A/G&M/977/2012 dt.28.07.2017.	1.08.0	28.07.2017	18.03.2020	-	-	18.09.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2699/EC/1(a)/1702/2014 dated 19.03.2015	12°04'28"N to 12°04'24"N 79°38'39"E to 79°38'43"E (12°04'24"N 79°38'39"E)	RS:94425 E:8282

6.	Rough stone & Earth	A.Ganesan,	S/o.Appadurai, 190, Kadaiveethi, Eraiyur & post, Vanur taluk, Viluppuram District	A/G&M/822/2016 dated 22.08.2016	2.62.5	28.07.2017	18.03.2020	-	-	16.05.2018	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5064/EC/1(a)/3324/2016 dated 15.07.2016	12°04'12"N to 12°04'19"N 79°38'39"E to 79°38'51"E (12°04'16"N 79°38'39"E)	RS:45600 E:20538
7.	Rough stone	P.Ramesh	S/o.Panchatcharam, 2/89, Main Road, Kaplampadi Village, Gingee Taluk, Viluppuram District.	B/G&M/2007/10 dt. 26.07.2014.	2.52.0	26.07.2014	25.07.2019.	-	-	30.09.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1316/EC/1(a)/588/2013 dated 18.07.2013.	12°22'843"N to 12°22'582"N 79°16'896"E to 79°16'770"E	RS:215665
8.	Rough stone	V.Gunasekaran	S/o. Vellaiya Goundar, No. 47/1A, East Street, Tirukoilur	B/G&M/ 196/09 dt. 25.05.2009	1.50.0	19.06.2009	18.06.2019	-	-	22.06.2009	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4898/EC/1(a)/3392/2016 dated 25.07.2016	11°55'22.78" N to 11°55'26.97" N 79°09'25.55"E to 79°09'31.92"E (11°55'25.41"N 79°09'26.09"E)	RS:27560
9.	Rough stone & Earth	R.Alagurajan	S/o.Ramaswamy, No.41, Erikaran Street, Nerkundram, Chennai-107.	A/G&M/263/13 dated 25.03.2015	1.46.5	25.03.2015	24.03.2020	-	-	04.05.2015	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1769/EC/1(a)/1631/2014 dated 19.02.2015	12°03'230"N to 12°03'27"N 79°40'31"E to 79°40'38"E (12°03'27.55"N 79°40'32.65"E)	RS:72906 E:15340
10.	Rough stone	Tmt.S.Nanthini	W/o.Sankar, No.14, 3rd Street, Jayapuram, Tindivanam Taluk	A/G&M/601/15 dated 31.12.2015	3.32.5	31.12.2015	30.12.2020	-	-	08.03.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4000/EC/1(a)/2546/2015 dated 21.12.2015	12°03'25.80" N to 12°03'33.90" N 79°40'05.88"E to 79°40'13.76"E (12°03'20.53"N 79°40'10.84"E)	RS:370455
11.	Rough stone	G.Selvakumar	S/o.Govindaraj, Emapair Village, Kallakurichi Taluk	B/G&M/ 369/2017 dt. 08.10.2018	1.50.0	08.10.2018	07.10.2023	-	-	04.12.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.9072/E	11°49'47"N to 11°49'51"N 78°58'13"E	RS:230090

41

													C No.16/2017, dated 04.02.2018	to 78°58'19"E (11°49'47"N 78°58'13"E)	
12.	Rough stone	R. Subramanian	S/o. Ramasamy, 15/3, Kattukottai, Emappair Post, Kallakurichi Taluk, Villupuram District.	B/G&M/2018/10 dt. 16.12.2010	1.96.0	10.01.2011	09.01.2021	-	-	25.01.2011	Non Working	Non Captive	-	11°53'01.58" N 79°03'39.54"E	RS:154465
13.	Rough stone & Earth	C. Balamurugan	S/o.Chandran, Samathi Street, Maikan Village, Tindivanam Taluk	B/G&M/398/2016 dt.24.09.2017	0.79.0	24.09.2017	23.09.2022	-	-	19.03.2018	Working	Non Captive	Yes, letter No.DEIAA-File No.DIA/TN/MIN/5779/2017/DEIAA/2017, dated 01.08.2017	12°07'55.50" N to 12°07'59.47" N 79°36'24.94"E to 79°36'28.56"E (12°07'56.09"N 79°36'24.94"E)	RS:50100 E:15687
14.	Rough stone	E. Sridhar	S/o Elumalai, No.1019, Pillaiyar Koil Street, Devikapuram Village, Arani Taluk, Tiruvannamalai District	B/G&M/23 /10 dt. 10.05.2010	5.00.0	16.08.2010	15.08.2020	-	-	01.07.2011	Non Working	Non Captive	-	12°26'10.85" N to 12°26'03.38" N 79°21'48.29"E to 79°21'36.79"E (12°26'3.38"N 79°21'42.94"E)	RS:502898
15.	Rough stone & Earth	C.Selvam,	S/o Chellapu Mudaliyar, Sangeethamangala m Road, Anandapuram, Gingee Taluk.	B/G&M/1470/2013 dt.18.07.2014	0.60.0	18.07.2014	17.07.2019	-	-	07.01.2019	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2602/EC/1(a)/1454/2014 dated 25.06.2014	12°07'21"N to 12°07'27"N 79°22'40"E to 79°22'45"E (12°07'21"N 79°22'40"E)	RS:21493 E:1773
16.	Rough stone & Earth	A.S.Srinivasan	S/o.Senagodan, Athanur & Post, Rasipuram Taluk, Namakkal District	B/G&M/459/13 dt. 06.02.2015	3.35.0	06.02.2015	05.02.2020	-	-	Nil	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1882/EC/1(a)/1459/2014 dated 02.07.2014	11°37'09"N to 11°37'01"N (78°55'02"E to 78°54'53"E)	RS:330000 E:23373

17.	Rough stone	A.Muthusamy	S/o. Arthanari Gounder, Kattukottai, Paranginatham, Mulligarpady Post, Sankarapuram Taluk, Viluppuram District.	B/G&M/2012/10 dt. 31.12.2010.	1.00.0	14.02.2011	13.02.2021	-	-	21.07.2016	Non Working	Non Captive	-	-	-
18.	Rough stone & Earth	V.Sankar	S/o Vivekanandan, 14, Jayapuram Colony, Tindivanam Town & Taluk, Viluppuram District	A/G&M/360/2016 dated 20.09.2016	3.66.5	20.09.2016	19.09.2021	-	-	28.09.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5616/1(a)/EC.No.3694/2016 dated 06.09.2016	12°03'32"N to 12°03'40"N 79°40'16"E to 79°40'23"E (12°03'34"N 79°40'16"E)	RS:161930 E:9416
19.	Rough stone	A.Ramesh	S/o. Alangaramoopar, Malaikottalam, Kallakurichi Taluk	B/G&M/2019/2010 dt. 03.07.2016.	2.00.0	03.07.2016	02.07.2026	-	-	31.01.2017	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2683/EC/1(a)/1739/2014 dated 13.03.2015	12°03'43"N to 12°03'50"N 78°57'08"E to 78°57'13"E (12°03.729'N 78°57.148"E)	RS:45600
20.	Rough stone & Earth	V. Chandirasekaran	S/o. Velluvan, 2/4, School Street, Kattupaiyur Village, Tirukoilur Taluk.	B/G&M/334/2014 dt. 09.09.2016.	1.02.5	09.09.2016	08.09.2021	-	-	22.12.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4736/EC/1(a)/3196/2016 dated 11.07.2016	11°57'9.50"N to 11°57'14.14" N 79°10'16.12"E to 79°10'18.84"E (11°57'9.50"N 79°10'16.12"E)	RS:70235 E:13654
21.	Rough stone & Earth	P.Deivasigamani	S/o.Pattaiyan, T.Nallalam Village, Perumukkal Post, Tindivanam Taluk.	B/G&M/1898/12 dt.11.04.2015	1.03.0	11.04.2015	10.04.2020	-	-	26.05.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2831/EC/1(a)/1752/2014 dated 19.03.2015	12°11'51"N to 12°11'55"N 79°45'08"E to 79°45'15"E	RS:61305 E:20060

														(12°11'54"N 79°45'8"E)	
22.	Rough stone	A.Balaraman	S/o,Aanaikutti Gounder, Keelsiviri Village & Post, Tindivanam Taluk, Viluppuram District.	B/G&M/ 365/11 dt. 25.11.2011.	1.10.0	26.12.2011	25.12.2021	-	-	27.01.2012	Non Working	Non Captive	No	12°11'35.31" N 79°45'29.14"E	RS:15856
23.	Rough stone & Earth	T. Rajendiran	S/o.Thandapani Naidu, 8/66, Sivan Kovil Street, Elavanasurkottai Village &Post, Ulundurpet Taluk.	B/G&M/975/2015 dt. 22.08.2016.	1.97.5	22.08.2016	21.08.2021	-	-	28.09.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5148/EC/ I(a)/3197/2016 dated 06.07.2016	11°39'59.60" N to 11°40'06.64" N 79°12'16.58" E to 79°12'22.80"E (11°39'59.60" N 79°12'18.64"E)	RS:116185 E:5884
24.	Rough stone & Earth	S.Arulkannan	S/o.Subramani, 252, Kulakkarai, Ulagalampoondi, Vikkiravandi Taluk.	B/G&M/1059/2015 dt. 23.01.2017	1.14.5	23.01.2017	22.01.2022	-	-	25.01.2018	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5825 / I(a) /EC.No. 3879/2016 dated 14.11.2016	12°02'42.84" N to 12°02'48.45" N 79°28'49.08" E to 79°28'52.37"E (12°02'43.45" N 79°28'49.08"E)	RS:94010 E:15480
25.	Rough stone & Earth	Tmt.R.Sujatha	W/o. (late) L. Rameshbabu, No.5, Shankar Nagar, Thenpathi, Sirkali Taluk, Nagapattinam District	B/G&M/1053/2015 dt. 14.10.2016 & B/G&M/436/ 2018 Dated 19.11.2018	4.22.5	14.10.2016	13.10.2021	-	-	24.08.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5061 / I(a) /EC.No. 3611/2016 dated 24.08.2016	11°40'02"N to 11°40'12"N 79°12'23"E to 79°12'35"E (11°40'03"N 79°12'24"E)	RS:254672 E:61926

26.	Rough stone & Earth	K.Paramasivam	S/o.Kanesa Gounder, No.290/5, Mariamman Koil Street, Chokkanthangal, Keelsiviri Post, Marukkanam Taluk	B/G&M/674/2015 dt.03.03.2016	1.06.5	03.03.2016	02.03.2021	-	-	04.05.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4827 / 1(a) /EC.No. 2829/2016 dated 17.02.2016	12°13'06"N to 12°13'11"N 79°45'26"E to 79°45'30"E (12°13'07"N 79°45'26"E)	RS:80640 E:6564
27.	Rough stone & Earth	E.Pavadairayan	S/o.Ettiyappan, Mariyamman Kovil Street, Kovadi, Tindivanam Taluk.	B/G&M/1137/13 dt.14.05.2015	0.75.0	14.05.2015	13.05.2020	-	-	19.08.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3109 / EC/ 1(a) / 2148/2014 dated 01.04.2015	12°11'39"N to 12°11'43"N 79°45'10"E to 79°45'14"E (12°11'40"N 79°45'10"E)	RS:37700 E:16248
28.	Rough stone	S.Srinivasan	S/o Sanjeevi, No.9, Wahab Nagar, Mirakkanam Road, Tindivanam Taluk	B/G&M/2005/10dt 23.09.2014	0.72.0	23.09.2014	22.09.2019.	-	-	02.12.2009	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1862 / EC/ 1(a) / 1139A/2013 dated 27.02.2014	12°12'24"N to 12°12'19"N 79°44'55"E to 79°44'59"E (12°12'19"N 79°44'55"E)	RS:31745
29.	Rough stone & Earth	P.Srinivasan	S/o. Pattabi Reddiyar, No.142, Mosque Street, C.Pallavaram, Chennai	B/G&M/290/13 dt.13.11.2015	1.61.5	13.11.2015	12.11.2020	-	-	29.06.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2951 / EC/ 1(a) / 1768/2014 dated 19.03.2015	12°13'58"N to 12°14'03"N 79°45'17"E to 79°45'23"E (12°13'58"N 79°45'20"E)	RS:128380 E:20247
30.	Rough stone & Earth	M. Krishnamoorthi	S/o.Murugaiyan, No.1, Palayakara Street, Thiruvakkarai	A/G&M/422/2013 dated 15.10.2016	0.80.0	15.10.2016	14.10.2021	-	-	22.03.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5424 / 1(a) / EC.No. 3557/2016 dated 10.08.2016	12°2'23.90"N to 12°2'27.58"N 79°39'32.17" E to 79°39'35.05"E (12°2'24.38"N 79°39'32.17"E)	RS:56054 E:10386
31.	Rough stone & Earth	A.Selvaraj	S/o.Arumugam, No.135, 7th Cross Road, Housing Board, Gopalapuram,	B/G&M/1187/13 dt.24.04.2015	1.07.5	24.04.2015	23.04.2020	-	-	18.05.2015	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2779 / EC/ 1(a)	12°13'22"N to 12°13'28"N 79°44'03"E to 79°44'07"E	

			Manoor Village, Tindivanam Taluk, Viluppuram District.										/1747/2014 dated 13.03.2015	(12°13'22""N 79°44'04"E)	
32.	Rough stone & Earth	G.AnandKumar Jain	S/o Gajraj Jain, No.5, Radhakrishna Street, Venkatta Nagar, Pondicherry.	A/G&M/528/08 dated 16.03.2015	1.05.5	16.03.2015	15.03.2020	-	-	13.04.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1206/EC/1(a)/1244/2013 dated 08.05.2014	12°02'00"N 79°38'52"E	RS:29350 E:4028
33.	Rough stone & Earth	T.Aravindan	S/o.Tinakaran, Perumnukkal Village, Tindivanam Taluk.	B/G&M/693/2012 dt.08.02.2016	2.12.0	08.02.2016	07.02.2021	-	-	30.10.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2763/EC/1(a)/1738/2014 dated 13.03.2015	12°13'15"N to 12°13'09"N 79°45'22"E to 79°45'16"E (12°13'12"N 79°45'16"E)	RS:145135 E:50624
34.	Rough stone	S.Ragurainan	S/o.Subramaniyan, 8, Mettu Street, Eraiyur Village & Post, Vanur Taluk, Viluppuram District.	A/G&M/590/2013 dated 20.02.2016	1.13.0	20.02.2016	19.02.2021	-	-	10.03.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4512/EC/1(a)/2778/2015 dated 19.01.2016	12°02'10.25" N to 12°02'14.44" N 79°38'52.17" E to 79°38'59.91"E (12°02'10.25" N 79°38'52.17"E)	RS:28714
35.	Rough stone & Earth	M.Kalaiyarasi	W/o. Manokaran, 4/53, Mariyamman Kovil Street, Sivanthangal, Chennai-69.	A/G&M/1461/2013 dated 14.06.2016	2.57.5	14.06.2016	13.06.2021	-	-	06.03.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3101/EC/1(a)/1804/2014 dated 27.03.2015	12°04'31"N to 12°04'43"N 79°38'54"E to 79°38'59"E (12°04'32"N 79°38'57"E)	RS:110810 E:49335
36.	Rough stone & Earth	C.Ganesan	S/o Chinnaiya Gounder, 168, Mettu Street, Kansanur Village, V.Parangani Post, Vanur Taluk	A/G&M/168/2015 dated 22.08.2016	4.27.5	22.08.2016	21.08.2021	-	-	15.12.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5069/EC/1(a)/3326/2016 dated 15.07.2016	12°03'20"N to 12°03'27"N 79°39'58"E to 79°40'10"E (12°03'20"N 79°39'58"E)	RS:95740 E:6848

4.6

37.	Rough stone & Earth	V.Gnanaguru,	S/o. Velayutham, Elavalapakkam Village, Perumukkal, Tindivanam Taluk	B/G&M/1207/2012 dt.21.06.2014	1.28.0	21.06.2014	20.06.2019	-	-	29.04.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2327 / EC/ 1(a) /1251/2014 dated 09.05.2014	12°13'37"N to 12°13'32"N 79°44'11"E to 79°44'15"E (12°13'33"N 79°44'11"E)	RS:120530 E:24954
38.	Rough stone & Earth	T.Kuppusamy	S/o.Thoppalan No.667, Marakkanam Road, Brammadesam Village, Tindivanam Taluk	B/G&M/531/14 dt.31.12.2015	0.99.5	31.12.2015	30.12.2020	-	-	26.02.2016	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3365 / EC/ 1(a) /2338/2015 dated 02.11.2015	12°11'43"N to 12°11'49"N 79°45'39"E to 79°45'42"E (12°11'47"N 79°45'39"E)	RS:43050 E:5820
39.	Rough stone	D. Murugapandiyan	S/o. Darmaraj, Chokkanandhandal, Gingee Taluk.	B/G&M/2008/10 dt. 30.12.2016.	2.00.0	30.12.2016	29.12.2021	-	-	21.08.2017	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5048 / EC/ 1(a) /3722/2016 dated 16.09.2016	12°15'17"N to 12°15'20"N 79°27'02"E to 79°27'11"E (12°15'17"N 79°27'02"E)	RS:144805
40.	Rough stone	Tmt R. Dhanalakami	W/o. Ravi, Throwpathiamman Koil Street, Vembi Village and Post, Viluppuram Taluk and District	B/G&M/205/2010 dt. 13.04.2010	3.00.0	07.06.2010	06.06.2020	-	-	11.06.2010	Working	Non Captive		12°07'55.87" N 79°26'40.90" E	RS:313852
41.	Rough stone	R. Dhanalakshmi,	W/o.J.Ravi, Throwpathiamman Kovil Street,Vembi Village, Viluppuram Taluk.	B/G&M/2001/2010 dt. 31.08.2016	2.21.5	31.08.2016	30.08.2021	-	-	06.03.2017	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1424 / EC/ 1(a) /637/2013 dated 01.08.2013	12°02'51.37" N to 12°02'57.60" N 79°27'50.49" E to 79°27'57.29"E (12°02'57"N 79°27'55"E)	RS:179930
42.	Rough stone	K. Murugavel	S/o. Kali Gounder, Nangathur Village, Anniyur Via, Viluppuram Taluk.	B/G&M/2000/10 dt. 16.12.2010.	0.50.0	31.01.2011	30.01.2021	-	-	26.12.2011	Non Working	Non Captive	No	12°07'36.16" N 79°24'43.73" E	RS:16872
43.	Rough stone	P. Elancheziyan	S/o. Panneerselvam, Vadakkananthal post, Kallakurichi	B/G&M/198/09 dt.25.05.09	2.00.0	23.06.2009	22.06.2019	-	-	10.05.2010	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4872 /	11°45'23.82" N to 11°45'27.08" N	RS:44275

47

			Taluk, Viluppuram District										1(a) / EC.No.3486/2016 dated 29.07.2016	78°51'24.54"E to 78°51'31.13"E (11°45'23.82"N 78°51'24.54"E)	
44.	Rough stone	V.Ravi	S/o.Veerasamy, Perumukkal Village, Tindivanam Taluk.	B/G&M/2003/10 dt. 23.09.2014.	0.37.5	23.09.2014	22.09.2019	-	-	01.02.2019	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1757 / 1(a) / EC.No.866/2013 dated 12.11.2013	12°13'19"N to 12°13'16"N 79°46'07"E to 79°46'04"E (12°13'16"N 79°46'06"E)	RS:23700
45.	Rough stone	P.Ravichandiran	S/o.Periyasamy, 1/13, Throwpathiamman Kovil Street, Thiruvakkarai Village, Vanur Taluk, Viluppuram District.	A/G&M/513/13 dated 30.05.2014	1.42.5	30.05.2014	29.05.2019	-	-	27.06.2014	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1962 / EC/1(a) 1192/2013 dated 15.04.2014	12°01'52"N to 12°01'49"N 79°38'54"E to 79°39'01"E (12°01'52"N 79°38'55"E)	RS:67895 E:10360
46.	Rough stone & Earth	K. Gnanasekaran	S/o.Kannadi counder, Mettu Street, Karasanur Village, Vanur Taluk, Villupuram District.	A/G&M/483/2013 dated 24.09.2017	1.24.5	24.09.2017	23.09.2022	-	-	13.12.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.3425 / 1(a) / EC.No.392(i)/2016 dated 19.06.2017	12°03'36"N to 12°03'40"N 79°40'07"E to 79°40'12"E (12°03'324.73"N 79°40'15.44") E	RS:47100
47.	Rough stone	D.Narayanaswamy	S/o.Dachinamoorthy, 25, Pnikaran Street, Mariyamman Kovil Street, Cuddalore District.	A/G&M/702/2017 dt. 27.08.2018	2.53.0	27.08.2018	26.08.2023	-	-	18.09.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.12681 / EC.No.11/2018 dated 05.07.2018	12°05'51"N to 12°06'00"N 79°42'32"E to 79°42'40"E (12°05'55"N 79°42'32"E)	RS:144425
48.	Rough stone & Earth	M.Jaffer sait	S/o. Mohamed Ravuthar, Panayapuram Village,	B/G&M/848/2016 dt. 27.09.2018.	1.55.0	27.09.2018	26.09.2023	-	-	22.10.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7427 / EC.No.14/2017	11°39'53.90" N to 11°40'00.33" N	RS:96417 E:11874

48

			Viluppuram Taluk.										dated 04.02.2018	79°12'18.51" E to 79°12'23.14"E (11°39'55.69" N 79°12'18.51"E)	
49.	Rough stone	T.Anbazhagan	S/o.Thangavel, Nathamedu Street, Olakoor & Post, Tindivanam Taluk, Viluppuram District	B/G&M/364/17 dt. 28.02.2019.	0.99.0	28.02.2019	27.02.2024	-	-	Nil	Non Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.8096 / EC.No.31/2017 dated 04.12.2018	12°13'36.27" N 79°44'16.52" E	RS:32211
50.	Rough stone	A. Sathishkumar	S/o.Arumugam, Mettu Street, Thuruvai, Rayapudupakkam Post, Vanur Taluk.	B/G&M/1142/2017 dt. 08.03.2019.	1.00.0	08.03.2019	07.03.2024	-	-	Nil	Non Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15706 / EC.No.12/2018 dated 04.12.2018	12°01'48"N to 12°01'54"N 79°38'49"E to 79°38'55"E (12°01'49.67" N 79°38'54.89"E)	RS:51890
51.	Rough stone	C. Prabu	S/o. Chakravarthi, Indira Nagar, Kiliyanur Village & Post, Vanur Taluk, Viluppuram	B/G&M/1141/2017 dt. 08.03.2019.	1.00.0	08.03.2019	07.03.2024	-	-	09.05.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15708 / EC.No.13/2018 dated 04.12.2018	12°01'49"N to 12°01'55"N 79°38'51"E to 79°38'55"E (12°01'49.40" N 79°38'53.69"E)	RS:104810
52.	Rough stone & Earth	S. Ranganathan	S/o. Subramania Gounder, No.135, Pondy Road, Marakkanam, Viluppuram District.	B/G&M/260/15 dt.15.02.2019	2.13.0	15.02.2019	14.02.2024	-	-	08.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18539 / EC.No.22/2018 dated 04.12.2018	12°11'27.47" N to 12°11'34.31" N 79°45'41.19" E to 79°45'46.59"E (12°11'29.96" N 79°45'41.19"E)	Rx:106902 E:9207

49

53.	Rough stone	H. Chinnakannan	S/o. Harikrishnan, Eraiyur Village, Vanur Taluk, Viluppuram District	A/G&M/362/2017 dated 28.02.2019	2.81.5	28.02.2019	27.02.2024	-	-	08.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7699 / EC.No.7/2017 dated 04.02.2018	12°04'07"N to 12°04'14"N 79°39'32"E to 79°39'41"E	RS:412160
54.	Rough stone & Earth	S. Raguraman	S/o. Subramaniya Reddiyar, Thenkodipakkam Village, Vanur Taluk, Viluppuram District.	A/G&M/778/2017 dt.15.02.2019	2.54.5	15.02.2019	14.02.2024	-	-	28.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15201 / EC.No.14/2018 dated 05.07.2018	12°08'33"N to 12°08'40"N 79°43'28"E to 79°43'36"E (12°08'37.02" N 79°43'28.16" E)	RS:109143 E:10166
55.	Rough stone & Earth	M.Babu	No.2, Mailam Road, Indira Nagar, Tindivanam	B/G&M/1159/2017 dt.09.08.2018	3.94.0	09.08.2018	08.08.2023	-	-	19.08.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15483 / EC.No.17/2018 dated 05.07.2018	12°13'13.96" N to 12°13'24.92" N 79°46'15.51" E to 79°46'22.51"E (12°13'16.44" N 79°46'16.04" E)	RS:211615 E:32120
56.	Rough stone	Manikkam	S/o.Kali, Nangathur Village, Vikkiravandi Taluk, Villupuram District.	B/G&M/363/17 dt. 08.03.2018.	1.00.0	08.03.2018	07.03.2023	-	-	15.03.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7527 / EC.No.13/2017 dated 04.02.2018	12°07'34"N to 12°07'37"N 79°24'44"E to 79°24'50"E (12°07'34"N 79°24'44"E)	RS:137825
57.	Rough stone & Earth	D.Ramesh	S/o Devaraj Perumukkal Village & Post, Marakkanam Taluk, Viluppuram District.	B/G&M/100/2018 dt.28.02.2019	1.76.0	28.02.2019	27.02.2024	-	-	16.05.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18540 / EC.No.23/2017 dated 04.12.2018	12°11'07.87" N to 12°11'11.80" N 79°45'42.90" E to 79°45'51.85"E (12°11'09.72" N 79°45'42.90"E	RS:114505 E:29241

															)	
58.	Rough stone & Earth	R.Muralidaran	Manager, OM sakthi Constructions, Thollamur Village, Vanur Taluk.	A/G&M/1048/2017 dt..16.08.2018	2.06.0	16.08.2018	15.08.2023	-	-	31.08.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.14175 / FC.No.13/2018 dated 05.07.2018	12°03'28"N to 12°03'36.50" N 79°40'35.29" E to 79°40'39.92"E (12°03'29.79" N 79°40'35.29"E)	RS:235220 E:30040
59.	Rough stone & Earth	G.Raja,	S/o. Gopal, Sivaraj Street, Thiruneermalai, Chennai.	A/G&M/90/2018 dt..16.08.2018	2.42.5	16.08.2018	15.08.2023	-	-	Nil	Non Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15627 / EC.No.18/2018 dated 05.07.2018	12°03'13.14"N to 12°03'21.15"N 79°40'16.66" E to 79°40'24.21"E (12°03'17.09" N 79°40'16.66'E)	RS:206255 E:20042
60.	Rough stone	T.Vasudevan	S/o. Thangavel, Eraiyur Village, Vanur Taluk, Viluppuram District.	A/G&M/181/2018 dt.15.02.2019	4.83.5	15.02.2019	14.02.2024	-	-	06.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18345 / EC.No.19/2018 dated 04.12.2018	12°04'09"N to 12°04'19"N 79°38'34"E to 79°38'45"E (12°04'16.98" N 79°38'34.04'E)	RS:404793
61.	Rough stone	S. Sankar	S/o. Sampantham, S. Kottur Village, Kandachipuram Taluk, Villupuram District.	B/G&M/366/17 dt. 08.03.2018.	3.00.0	28.03.2018	27.03.2023	-	-	04.06.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.8297 / EC.No.10/2017 dated 04.02.2018	11°58'25"N to 11°58'32"N 79°14'24"E to 79°14'33"E (11°58'25"N 79°14'26'E)	RS:191318
62.	Rough stone	S. Revathi	W/o. Selvaraj B1, Krishna Apartment, Kavarai Village, Kallakurchi.	B/G&M/365/17 dt. 08.03.2018.	2.16.0	13.03.2018	12.03.2023	-	-	28.03.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.7596 / EC.No.12/2017 dated 04.02.2018	12°11'48.13" N 79°45'16.40" E	RS:151034

63.	Rough stone & Earth	D. Manokar	S/o. Dhamothiran, Anna Nagar, Eraiyur Village, Vanur Taluk.	A/G&M/176/2018 dt.15.02.2019	1.90.5	15.02.2019	14.02.2024	-	-	03.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18212 / EC.No.18/2018 dated 04.12.2018	12°03'46"N to 12°03'53"N 79°38'28"E to 79°38'33"E (12°03'47.31" N 79°38'29.29"E)	RS:222030 E:26970
64.	Rough stone	G. Tamilselvan	S/o. (late) M. Ganesan, Gounder, Melmampattu Village, Melmalayanur Post, Gingee Taluk.	B/G&M/193/09 Dt. 03.09.09. & B/G&M/950/2017 Dt. 09.08.2018	6.81.0	12.10.2009	11.10.2019	-	-	06.02.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18587 / EC.No.26/2018 dated 04.12.2018	12°20'20.51"E to 12°20'20.04"E 79°20'40.65"N to 79°20'48.88"N (12°20'20.13" E 79°20'40.65" N)	RS: 35567
65.	Rough stone & Earth	K.Balamurugan	S/o.Kuppusamy, Kurasanur & Post, Vanur Taluk.	A/G&M/138/2017 dt. 27.08.2018	2.12.0	27.08.2018	26.08.2023	-	-	13.11.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15355 / EC.No.15/2018 dated 05.07.2018	12°03'18"N to 12°03'26"N 79°40'05"E to 79°40'10"E (12°03'18"N 79°40'06"E)	RS:198055 E:10544
66.	Rough stone & Earth	E. Jayasankar	S/o. Elumalai, No.198, Vinayakar Koil Street, Eraiyur Village, Vanur Taluk, Viluppuram District	A/G&M/180/2018 dt.15.02.2019	3.37.5	15.02.2019	14.02.2024	-	-	06.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18349 / EC.No.20/2018 dated 04.12.2018	12°04'02"N to 12°04'13"N 79°38'35"E to 79°38'42"E (12°04'03.46" N 79°38'35.07" E)	RS:378010
67.	Rough stone & Earth	K. Mujeepur Ragman	S/o. Kalipulla Selam Main Road, Elavanasurkottai, Ulundurpet.	B/G&M/174/2015 dt. 10.10.2017.	1.40.5	10.10.2017	09.10.2022	-	-	07.12.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.5134 /1(a)/ EC.No.3912/2016 dated 07.06.2017	11°39'48"N to 11°39'54"N 79°12'17"E to 79°12'22"E 11°39'496"N 79°12'18"E	RS:24660 E:2790
68.	Rough stone & Earth	M. Moorthi	S/o. Munian, Mumarsamy Kovil Street, Thiruvakkarai	A/G&M/203/2018 dt.15.02.2019	3.93.5	15.02.2019	14.02.2024	-	-	14.03.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18543 / EC.No.24/2018	12°2'42.77"N to 12°2'53.80"N 79°39'50.80"E to	RS:355330 E:26818

			Village, Vanur Taluk.										dated 04.12.2018	79°39'57.78"E (12°2'46.77"N 79°39'50.80" E)	
69.	Rough stone & Earth	N. Venkatesh	S/o. Nataraj, No.158, Kurinji Nagar, Vellisemmandalam, Cuddalore.	B/G&M/1013/2017 dt.30.02.2019	2.30.5	30.02.2019	29.02.2024	-	-	20.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.17579 / EC.No.17/2018 dated 04.12.2018	12°13'32"N to 12°13'38"N 73°44'15"E to 73°44'51"E (12°13'32"N 73°44'15"E)	RS:195530 E:33669
70.	Rough stone & Earth	V.Sadaiyappan	No.18, Amal Nagar, West Tambaram, Chennai-600 045.	A/G&M/95/2018 dt. 16.08.2018	2.30.5	16.08.2018	15.08.2023	-	-	18.09.2018	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.15429 / EC.No.16/2018 dated 05.07.2018	12°13'331.97"N to 12°03'41.75'N 79°40'06.13"E to 79°40'16.50"E (12°03'32.44" N 79°40'06.13" E)	RS:277000 E:12934
71.	Rough stone & Earth	S. Thirumurugan	S/o. Sivaprakasam, Vinayagar Kovil Street, Kathirkamam, Puducherry.	A/G&M/269/2018 dt.15.02.2019	2.92.0	15.02.2019	14.02.2024	-	-	22.04.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18382 / EC.No.21/2018 dated 04.12.2018	12°02'30"N to 12°02'38"N 79°38'33"E to 79°38'40"E (12°02'31.21" N 79°38'34.83" E)	RS:240645 E:30336
72.	Rough stone & Earth	V.Nagaraj	S/o. Vaiyapuri, No.3/32A, South Street, Okaiyur Post, Kallkurichi Taluk, Viluppuram District.	B/G&M/118/2018 dt. 25.01.2019.	1.36.5	25.01.2019	24.01.2024	-	-	25.02.2019	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.17233 / EC.No.14/2018 dated 04.12.2018	11°39'40.39" N to 11°039'46.71" N 79°11'58.95"E to 79°12'05.54"E (12°02'31.21" N 79°38'34.83" E)	RS:72405 E:6796
73.	Rough stone & Earth	D.Selvakumar,	S/o.Dandapani, Mailam Village, Tindivanam Taluk.	B/G&M/70/2014 dt.17.07.2014	1.08.0	17.07.2014	16.07.2019	-	-	16.02.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2639 / EC/1(a)/1391/2014 dated 25.06.2014	12°07'50"N to12°07'55"N 79°36'24"E to 79°36'28"E (12°07'51"N 79°36'24"E)	RS:64000 E:21960

74.	Rough stone	N. Elangovan,	S/o. Nachiyappan, Devapandalam Village, Sankarapuram Taluk.	B/G&M/200/09 Dt. 27.05.2009	3.00.0	07.09.2009	06.09.2019	-	-	29.09.2009	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4757 / 1(a)/EC.No.3281 /2015 dated 11.07.2016	11°56'52.79" N to11°56'59.55 "N 78°52'47.46"E to 78°52'59.26"E (11°56'52.79" N 78°52'52.26"E)	RS:72461
75.	Rough stone	K. Arjunan,	S/o. Kuppusamy Gr., Malaiyarasankuppa m Village, Mazhavanthangal Post, Gingee taluk, Viluppuram District	B/G&M/24 /2010 dt. 18.02.2010	1.50.0	12.07.2010	11.07.2020.	-	-	17.12.2012	Non Working	Non Captive	No	12°05'55.99" N 79°17'11.65"E	RS:63044
76.	Rough stone	D.Ramachandran	S/o. Duraisamy, Thimmanandal Village, Arur post, Sankarapuram Taluk.	B/G&M/199/09 dt. 27.05.09	3.00.0	31.08.2009	30.08.2019	-	-	16.09.2009	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4725 / 1(a)/EC.No.3331 /2016 dated 15.07.2016	11°56'0.09"N to11°56'59.94 "N 78°51'57.68"E to 78°52'01.04"E (11°56'0.09"N 78°51'57.68"E)	RS:79353
77.	Rough stone	A. Sivananthan,	S/o. Anbazhagan, Mettu Street, Vadaneerkunam post, Tindivanam Taluk.	B/G&M/185/09 Dt. 11.06.2009	1.64.0	24.08.2009	23.08.2019	-	-	12.10.2009	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.4826 / 1(a)/EC.No.3347 /2016 dated 15.07.2016	12°13'08"N to 12°13'14"N 79°45'57"E to 79°46'03"E (12°13'10"N 79°45'57"E)	RS:80015
78.	Rough stone	Tmt.Saithanebee	W/o. K.S. Mesthan, 59, Desurpattai Salai, Krishnapuram, Gingee, Viluppuram District	B/G&M/2006/10 dt. 25.01.2011.	3.00.0	28.02.2011	27.02.2021	-	-	30.06.2017	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2484 / 1(a)/EC.No.3590 /2015 dated 19.08.2016	12°26'16"N to 12°26'21"N 79°23'05"E to 79°23'11"E	RS:155980
79.	Rough stone	P. Ramalingam,	S/o. Perumal, Palliyandur village Viluppuram Taluk Viluppuram District.	B/G&M/207/10 dt. 12.05.2010.	3.72.0	16.08.2010	15.08.2020.	-	-	17.09.2010	Working	Non Captive	Yes, letter No.DEIAA-TN/F.No.18617 / I(a)/EC.No.28/2 018 dated 04.12.2018	12°11'36.91" N 79°45'21.21"E	RS:55102

80.	Rough stone	Tmt. K. Parimala	W/o. Senthamil Selvan, Murugan Koil Street, Kalathumpattu Post, Gingee Taluk, Villupuram District	B/G&M/25 /2010 dt. 30.03.2010	2.50.0	16.04.2010	15.04.2020	-	-	23.04.2010	Non Working	Non Captive	No	12°13'25.45" N 79°18'46.08"E	RS:30566
81.	Rough stone & Earth	V.Kumar	S/o. Velayutham, Elavalapakkam Village, Perumukkal, Tindivanam Taluk	B/G&M/961/2012 dt.21.06.2014	2.33.0	21.06.2014	20.06.2019	-	-	21.07.2014	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2328 / EC/. 1(a)/ 1337/2014 dated 30.05.2014	12°14'54"N to 12°14'46"N 79°44'48"E to 79°44'41"E (12°14'46"N 79°44'45"E)	RS:255280 E:54491
82.	Rough stone & Earth	Tmt.L.Savithri	W/o.Loganathan, Eraiyur Village & post, Vanur taluk.	A/G&M/360/13 dated 30.05.2014	0.99.0	30.05.2014	29.05.2019	-	-	12.06.2014	Non Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.1650 / EC/ 1(a)/ 1169/2013 dated 20.03.2014	12°04'05"N to 12°04'08"N 79°39'33"E to 79°39'40"E (12°04'6"N 79°39'33"E)	RS:34640 E:5983
83.	Rough stone	S. Kamsaladevi	W/o. Surasingh, Eyyil Village & post, Gingee Taluk, Villupuram District.	B/G&M/192/09 dt. 11.06.2009.	3.00.0	23.06.09	22.06.2019	-	-	18.03.2010	Non Working	Non Captive	No	12°24'38.17" N 79°22'26.58"E	RS:231055
84.	Rough stone	B. Sakthivel	S/o. Balasubramaniyan Vadakurumbur, Ulundurpet Taluk, Villupuram District	B/G&M/367/17 dt.08.03.2018.	2.94.0	08.03.2018	07.03.2023	-	-	12.03.2018	Working	Non Captive	Yes, letter No.DIA/TN/MIN/ 6526/2017/DEIAA 2017,Ec.No.1, Dated:01.08.201 7	11°39'37"N to 11°39'44"N 79°12'09"E to 79°12'15"E (11°39'37"N 79°12'10"E)	RS:180180
85.	Rough stone	K.Ashokkumar	S/o.Kandasamy, Nallalam Kootroad, Perumukkal Village, Tindivanam Taluk.	B/G&M/1224/12 dt.16.04.2015	0.95.0	16.04.2015	15.04.2020	-	-	23.10.2015	Working	Non Captive	Yes, letter No.SEIAA-TN/F.No.2677 / EC/ 1(a)/ 1546/2014 dated 14.08.2014	12°13'13"N to 12°13'08"N 79°46'36"E to 79°46'44"E	RS:79075 E:24804

List of Letter of Intent (LOI) Holders in the District along with Mineral Resources:

Sl. No.	Name of the Mineral	Name of the Lessee	Address & Contact No. of letter of Intent Holder	Letter of Intent Grant Order No. & Date	Area of Mining lease to be allotted	Validity of LoI	Use (Captive/ Non-Captive)	Location of the Mining Lease (Latitude& Longitude)	Total resources in cbm
1	2	3	4	5	6	7	8	9	10
1.	Rough stone & Gravel	V.Ramesh	S/o. Venkatapathy, No.5, Thangaraj Street, HLL Colony, Pammal, Chennai – 75.	B/G&M/463/2018 dt.18.01.2019	3.53.0	-	Non Captive	12°03'10.49"N to 12°03'20.70"N 79°40'08.70"E to 79°40'16.98"E (12°03'11.13"N 79°40'09.94"E)	1295840 M^3 of RS & 64792 M^3 of Gravel
2.	Rough stone & Earth	Santhosh Blue Metals, Prop. S.V. Venkatesh	No.173, Sarkar Thoppu, Tindivanam.	B/G&M/357/2018 dt.04.01.2019	2.06.0	-	Non Captive	12°03'30"N to 12°03'36"N 79°40'23"E to 79°40'30"E (12°03'33"N 79°40'23"E)	914130 M^3 of RS & 40628 M^3 of E
3.	Rough stone & Earth	D. Dhandapani	S/o. Duraisamy, Eraiyur Village, Vanur Taluk, Viluppuram District.	B/G&M/423/2018 dt.18.01.2019	1.49.5	-	Non Captive	12°04'07.16"N to 12°04'13.93"N 79°38'59.73"E to 79°39'03.75"E (12°04'07.45"N 79°39'00.95"E)	569040 M^3 of RS & 28452 M^3 of E
4.	Rough stone & Earth	Sri Balaji Blue Metals & M.Sand	No.33/8, Mailam Road, Indira Nagar, Tindivanam	B/G&M/462/2018 dt.15.02.2019	2.85.5	-	Non Captive	12°13'05.47"N to 12°13'13.31"N 79°47'04.29"E to 79°47'10.26"E (12°13'06.53"N 79°47'04.83"E)	1284120 M^3 of RS & 85608 M^3 of E
5.	Rough stone	K. Balasubramanian	S/o. Karuppaiya, 28/4B, Raja Nagar, Kallakurichi – 606 202.	B/G&M/1143/2017 dt.17.01.2018	2.00.0	-	Non Captive	12°03'41.93"N to 12°03'48.98"N 78°57'09.17"E to 78°57'15.01"E (12°13'43.97"N 78°57'09.17"E)	803600 M^3 of RS

6.	Rough stone & Gravel	A.Aridass	School Street, Kadagampattu, Vanur Taluk, Viluppuram District.	A/G&M/337/2018 dt.30.01.2019	1.77.0	-	Non Captive	$12^0$03'55.01"N to $12^0$04'01.91"N $79^0$38'24.85"E to $79^0$38'32.27"E ($12^0$03'56.29"N $79^0$38'24.85"E)	1180270 M^3 of RS & 33722 M^3 of Gravel
7.	Rough stone & Earth	K.Gnanasekaran	S/o.Kannadi Gounder, Karasanur Village, Vanur Taluk, Viluppuram District.	A/G&M/277/2018 dt.04.01.2019	2.68.0	-	Non Captive	$12^0$03'20.03"N to $12^0$03'27.36"N $79^0$40'15.44"E to $79^0$40'23.75"E ($12^0$03'24.73"N $79^0$40'15.44"E)	1206000 M^3 of RS & 53600 M^3 of E

15) Quality/ Grade of Mineral available in the district

Rough Stone

Good exposures of charnockite series of rock are available in the district and it is mainly quarried as Roughstone. Charnockiteis blusih grey fine to medium grained massive rock which consists of potash feldspar, plagioclase ,quartz and hypersthene. Charnockite series of rock available in the district meets out the engineering, physical and chemical parameters specified by NHAI for the purpose of construction of roads and bridges.

16. Use of Mineral

Rough stone:

The massive charnockite series of rocks are having strong physical properties and therefore it can be crushed and sorted into various sizes for use in concrete, coated with bitumen for road construction and other civil works.

17. Demand and Supply of the Minerals in the last three years

Rough stone			
Year	**2016-17**	**2017-18**	**2018-19**
Demand (Cub.m)	782595.08	753676.27	928248.61
Supply (Cub.m)	782595.08	753676.27	928248.61

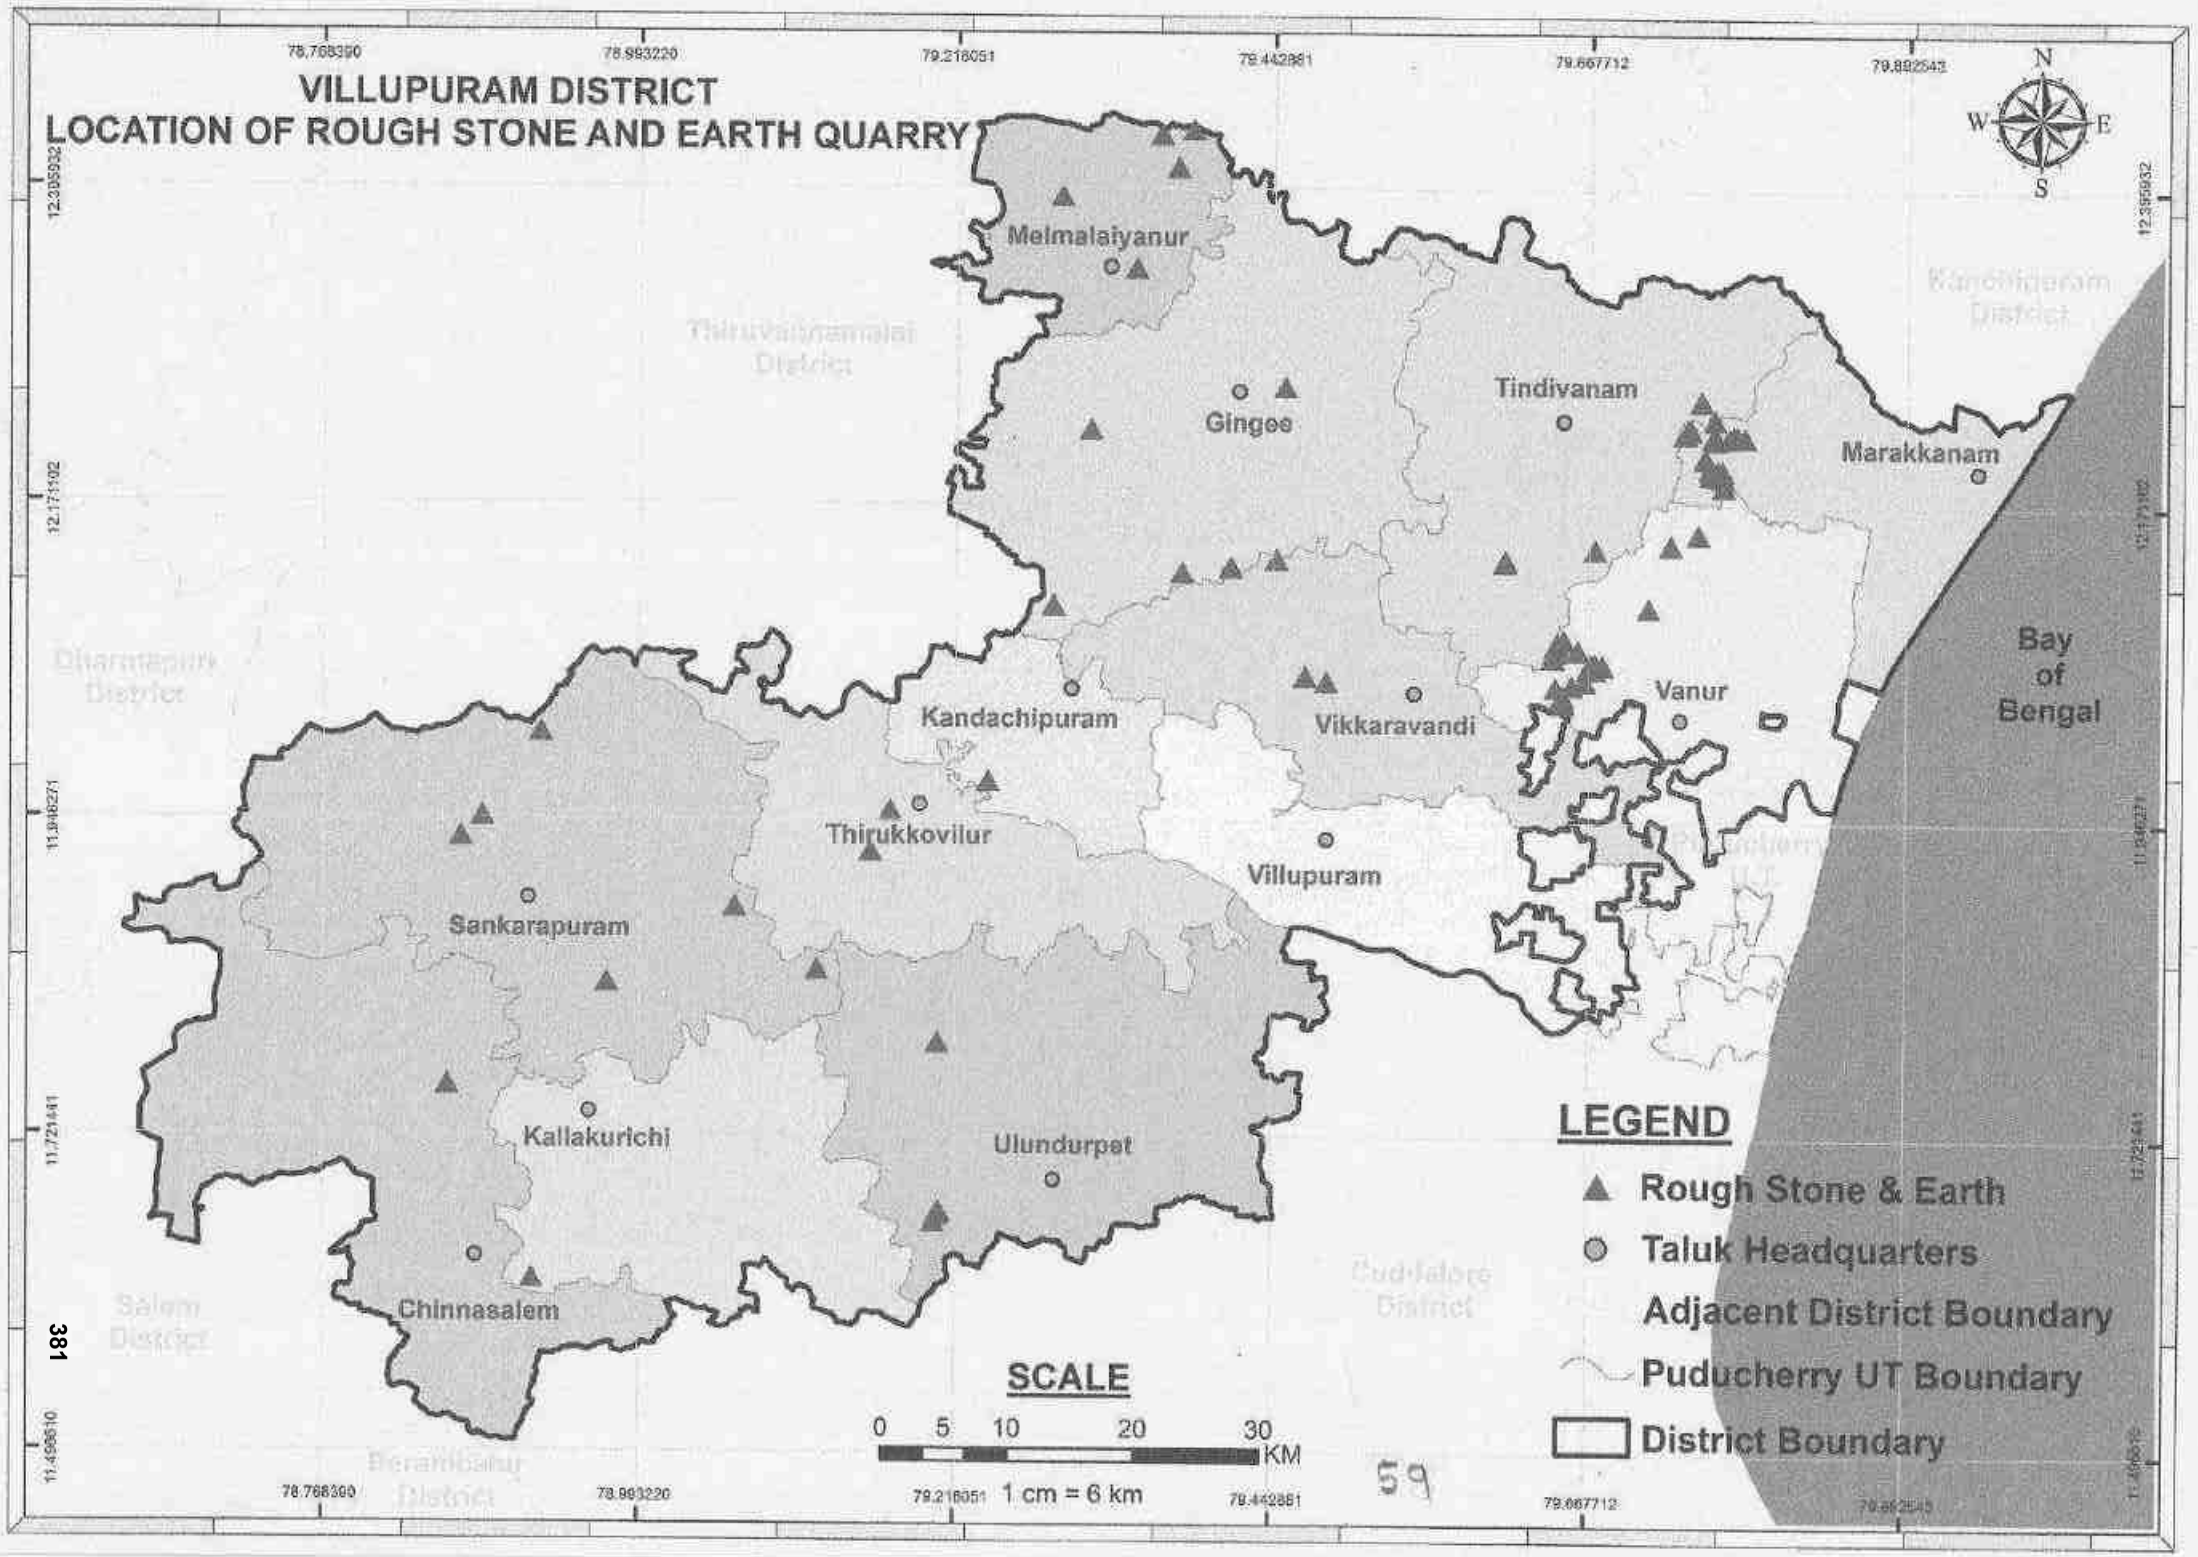
VILLUPURAM DISTRICT
LOCATION OF ROUGH STONE AND EARTH QUARRY
N
W
E
S
Melmalaiyanur
Gingee
Tindivanam
Marakkanam
Kandachipuram
Vikkaravandi
Vanur
Thirukkovilur
Villupuram
Sankarapuram
Kallakurichi
Ulundurpet
Chinnasalem
Bay of Bengal
Thiruvannamalai District
Kanchipuram District
Dharmapuri District
Cuddalore District
Salem District
Perambalur District
LEGEND
Rough Stone & Earth
Taluk Headquarters
Adjacent District Boundary
Puducherry UT Boundary
District Boundary
SCALE
0 5 10 20 30 KM
1 cm = 6 km

381

19. Details of the area where there is a cluster of mining leases :

Sl. No.	Cluster area	Number of mining leases	Location (Latitude and Longitude)	
1	Thiruvakkarai	7	1	12°01'52"N to 12°01'49"N 79°38'54"E to 79°39'01"E (12°01'52"N - 79°38'55"E)
			2	12°02'00"N - 79°38'52"E
			3	12°02'10.25"N to 12°02'14.44"N 79°38'52.17"E to 79°38'59.91"E (12°02'10.25"N - 79°38'52.17"E)
			4	12°2'23.90"N to 12°2'27.58"N 79°39'32.17"E to 79°39'35.05"E (12°2'24.38"N - 79°39'32.17"E)
			5	12°02'30"N to 12°02'38"N 79°38'33"E to 79°38'40"E (12°02'31.21"N - 79°38'34.83"E)
			6	12°01'49"N to 12°01'55"N 79°38'51"E to 79°38'55"E (12°01'49.40"N 79°38'53.69"E)
			7	12°01'48"N to 12°01'54"N 79°38'49"E to 79°38'55"E (12°01'49.67"N - 79°38'54.89"E)
2	Thollamur	10	1	12°03'230"N to 12°03'27"N 79°40'31"E to 79°40'38"E (12°03'27.55"N -79°40'32.65"E)
			2	12°03'25.80"N to 2°03'33.90"N 79°40'05.88"E to 79°40'13.76"E (12°03'20.53"N 79°40'10.84"E)
			3	12°03'20"N to 12°03'27"N 79°39'58"E to 79°40'10"E (12°03'20"N 79°39'58"E)
			4	12°03'32"N to 12°03'40"N 79°40'16"E to 79°40'23"E (12°03'34"N - 79°40'16"E)
			5	12°03'36"N to 12°03'40"N 79°40'07"E to 79°40'12"E (12°03'324.73"N 79°40'15.44"E)
			6	12°13'331.97"N to 12°03'41.75"N 79°40'06.13"E to 79°40'16.50"E (12°03'32.44"N - 79°40'06.13"E)
			7	12°03'13.14"N to 12°03'21.15"N 79°40'16.66"Eto79°40'24.21"E (12°03'17.09"N- 79°40'16.66'E)
			8	12°03'28"N to 12°03'36.50"N 79°40'35.29"E to79°40'39.92"E (12°03'29.79"N -79°40'35.29'E)
			9	12°03'18"N to 12°03'26"N 79°40'05"E to 79°40'10"E (12°03'18"N - 79°40'06"E)

60

			10	12°2'42.77"N to 12°2'53.80"N 79°39'50.80"E to 79°39'57.78"E (12°2'46.77"N - 79°39'50.80"E)
3	Eraiyur	8	1	12°04'07"N to 12°04'14"N 79°39'32"E to 79°39'41"E
			2	12°04'05"N to 12°04'08"N 79°39'33"E to 79°39'40"E (12°04'6"N 79°39'33"E)
			3	12°04'31"N to 12°04'43"N 79°38'54"E to 79°38'59"E (12°04'32"N 79°38'57"E)
			4	12°04'12"N to 12°04'19"N 79°38'39"E to 79°38'51"E (12°04'16"N 79°38'39"E)
			5	12°04'28"N to 12°04'24"N 79°38'39"E to 79°38'43"E (12°04'24"N - 79°38'39"E)
			6	12°04'09"N to 12°04'19"N 79°38'34"E to 79°38'45"E (12°04'16.98"N 79°38'34.04"E)
			7	12°04'02"N to 12°04'13"N 79°38'35"E to 79°38'42"E (12°04'03.46"N 79°38'35.07"E)
			8	12°03'46"N to 12°03'53"N 79°38'28"E to 79°38'33"E (12°03'47.31"N 79°38'29.29"E)
4	T.Nallalam	6	1	12°11'36.91"N - 79°45'21.21"E
			2	12°11'35.31"N - 79°45'29.14"E
			3	12°11'48.13"N - 79°45'16.40"E
			4	12°11'51"N to 12°11'55"N 79°45'08"E to 79°45'15"E (12°11'54"N - 79°45'8"E)
			5	12°11'39"N to 12°11'43"N 79°45'10"E to 79°45'14"E (12°11'40"N - 79°45'10"E)
			6	12°11'56"N to 12°11'46"N 79°45'33"E to 79°45'26"E (12°11'47"N 79°45'29"E)
5	Keelarungunam	4	1	12°13'36.27"N - 79°44'16.52"E
			2	12°13'37"N to 12°13'32"N 79°44'11"E to 79°44'15"E (12°13'33"N 79°44'11"E)
			3	12°13'15"N to 12°13'09"N 79°45'22"E to 79°45'16"E (12°13'12"N - 79°45'16"E)
			4	12°13'32"N to 12°13'38"N 79°44'15"E to 79°44'21"E (12°13'32"N- 73°44'15"E)

20. Details of Eco Sensitive Area:

Oussudu Lake Birds Sanctuary over an extent of 331.78.5 hectares falls in S.F.No.106 of Poothurai Village and S.F.No.1/1 of Perambai Village of Vanur Taluk, Viluppuram District.

21. Impact on the Environment (Air, Water, Noise, Soil Flora & Fauna, Land use, Agriculture, Forest etc.,) due to Mining Activity

Generally, the Environmental impacts can be categorized as either primary or secondary. Primary impacts are those, which are attributed directly by the project, secondary impacts are those, which are indirectly induced and typically include the associated investment and changed pattern of social and economic activities by the proposed action.

The impact has been ascertained for the project assuming that the pollution due to mining activity has been completely spelled out under the baseline environmental status for the entire ROM which is proposed to exploit from the mines.

Air:

Mining Operations are carried out by opencast semi mechanized/ Mechanized method, dust particles are generated due to various activities like, Excavation, Loading, handling of mineral and transportation. The air quality in the mining area depends upon the nature and concentration of emissions and meteorological conditions.

The major air pollutants due to mining activity includes:-

- Particulate Matter (Dust) of various sizes.
- Gases, such as, Sulphur Dioxide, Oxides of Nitrogen, Carbon Monoxide etc., from vehicular exhaust.
- Dust is the single Air pollutant observed in the open cast mines. Diesel operating drilling machines, small amount of blasting and movement of machinery/ vehicles produce NO_X,$SO_2$and CO emissions, usually at low

levels. Dust can be of significant nuisance surrounding land users and potential health risk in some circumstances.

Water Impact

The mining operation leads to intersect the water table cause ground water depletion. Due to the interruption surface water sources like River, Nallah, Odai etc., surface water system, Drainage pattern of the area is altered.

Noise

Noise pollution is mainly due to operation of Machineries and occasional plying of machineries. These activities will create Noise pollution in the surrounding area.

Land Environment

The topography of the area will change, due to the Topographical changes the entire Eco system will be altered.

Flora and Fauna

The impact on biodiversity is difficult to quantify because of its diverse and dynamic characteristics.

Mining activities generally result in the deforestation, land degradation, water, air and noise pollution which directly or indirectly affect the faunal and floral status of the project area.

However, occurrence and magnitude of these impacts are entirely dependent upon the project location, mode of operation and technology involved.

22. Remedial Measure to mitigate the impact of Mining on the Environment

Air

Mitigated measures suggested for air pollution controls are based on the baseline ambient air quality of the area

The following measures are proposed to adopted in the mines such as,

- Dust generation shall be reduced by using sharp teeth of shovels.
- Wet drilling shall be carried out to contain the dust.
- Controlled blasting techniques shall be adopted.
- Water spraying on haul roads, service roads and overburden dumps will help in reducing considerable dust pollution.
- Proper and regular maintenance of mining equipment's have to be considered.
- Transport of material in trucks covered with tarpaulin.
- The mine pit water can be utilized for dust suppression in and around mine areas.
- Information on wind direction and meteorology will be considered while planning, so that pollutants, which cannot be fully suppressed by engineering technique, will be prevented from reaching the nearby agriculture area.
- Comprehensive green belt around overburden dumps has to be carried out to reduce to fugitive dust emissions in order to create clean and healthy environment.

Water

- Construction of garland drains to divert surface run-off into the mining area.
- Construction of check dams / gully plugs at strategic places to arrest silt wash off from broken up area.
- Retaining walls with weep hole will be constructed around the mine boundariesto arrest silt wash off.
- The mined out pits shall be converted into the water reservoir at the end of mine life. This will help in recharging ground water table by acting as a water harvesting structure.
- Periodic analysis of mine pit water and ground water quality in nearby villages.

- Domestic sewage from site office & urinals/latrines provided in ML is discharged in septic tank followed by soak pits.

Noise

Mitigation measures

- Periodic maintenance of machinery, equipment'sshall be ensured to keep the noise generated at minimum.
- Development of thick green belt around mining area and haul roads to reduce the noise.
- Provision of earplugs to workers exposed to high noise generating activities. Workers and operators at work site will be provided with earmuffs.
- Conducting periodical medical checkup of all workers for any noise related health problems.
- Proper training to personnel to create awareness about adverse noise level effects.
- Periodic noise monitoring at suitable locations in the mining area and nearby habitations to assess efficacy of adopted control measures.
- During the blasting, optimum Spacing, Burden and charging of holes will be made under the supervision of competent qualified mines foreman, Mate as approved by Director of Mines safety.

Biological Environment

MITIGATION MEASURES:

- Development of gap filling saplings in the safety barrier left around the quarry area.
- Carrying out thick greenbelt with local flora species predominantly with long canopy leaves on the inactive mined out upperbenches.
- Development of dense poly-culture plantation using local flora species in the mining area at conceptual stage.
- Adoption of suitable air pollution control measures as suggested above.
- Transport of materials in trucks covered with tarpaulin.

- Construction of garland drains and settling tank to arrest silt wash off from lease area.
- Construction of retention walls around lower boundary of mining area to arrest silt washoff and roll down boulders.
- Retaining walls with weep hole will be constructed around the mine Boundaries to arrest silt wash off.

23. Reclamation of Mined out area (Best Practice already implemented in the district, requirement as per Rules and Regulation, Proposed reclamation plan)

In rough stone quarry lease permitted area the shallow holes of 32mm diameter and 1.5 feet depth will be drilled and conventional low power explosives such as Slurry Explosives, ordinary safety fuse only will be used for rough stone. Hence, ground vibration and noise pollution will be minimal and restriced within the quarry workings.

24. Risk Assessment and Disaster Management Plan

Risk Assessment

While designing Disaster Management plans for a particular region, different vulnerabilities for that region has to be assessed first to streamline different developmental plans.

VULNERABILITY ANALYSIS

The major rivers flowing through this District are as follows,

- Gedilam River - Flows through Tirukoilur and Ulundurpet Taluks.
- Malattar River - Joins Gedilam before flowing into the Bay of Bengal
- Pennaiyar River - Flows through Sankarapuram, Tirukoilur and Viluppuram Taluks.

- Sankarabarani River - Originates in Gingee Taluk, flows through Viluppuram.

The rivers are seasonal and could not be used for irrigation purpose to the expected level because of low precipitation in most of the days of a year. The North East Monsoon which sets in during October and November brings forth heavy rainfall in major parts of this district causing heavy floods and cyclone in the coastal areas from Marakkanam, Tirukoilur, Viluppuram, Ulundurpet, Tindivanam and Vanur Taluks.The vulnerable villages to natural calamities in each taluk and the flood prone areas in each taluk are detailed below with their maps.

LIST OF VILLAGES VULNERABLE TO NATURAL CALAMITIES

1. Since Marakkanam and Vanur blocks are facing Bay of Bengal, they face the risk of Tsunami directly.
2. Based on the history of rainfall and calamities way back a decade, the following 166 places are identified as vulnerable locations with regard to Flood and Cyclone.

ABSTRACT OF LIST OF VILLAGES VULNERABLE

Sl. No	Name of the Taluk	Highly Vulnerable	Vulnerable	Moderately Vulnerable	Low Vulnerability	Total No.of Vulnearable Location
1	VILUPPURAM	0	0	0	21	21
2	VIKRAVANDI	0	0	0	27	27
3	VANUR	0	0	0	7	7
4	TINDIVANAM	0	0	0	17	17
5	GINGEE	0	0	0	4	4
6	MELMALAIYANUR	0	0	0	0	0
7	MARAKKANAM	0	8	21	24	53
8	TIRUKOILUR	0	1	3	5	9
9	ULUNDURPET	3	0	1	5	9
10	KANDACHIPURAM	0	0	0	0	0

11	KALLAKURICHI	0	0	0	2	2
12	SANKARAPURAM	0	0	0	0	0
13	CHINNASALEM	0	0	0	0	0
14	WRO VPM	0	0	0	1	1
15	WRO KK	1	4	0	15	20
	TOTAL	4	13	25	128	170

District Disaster Management Plan

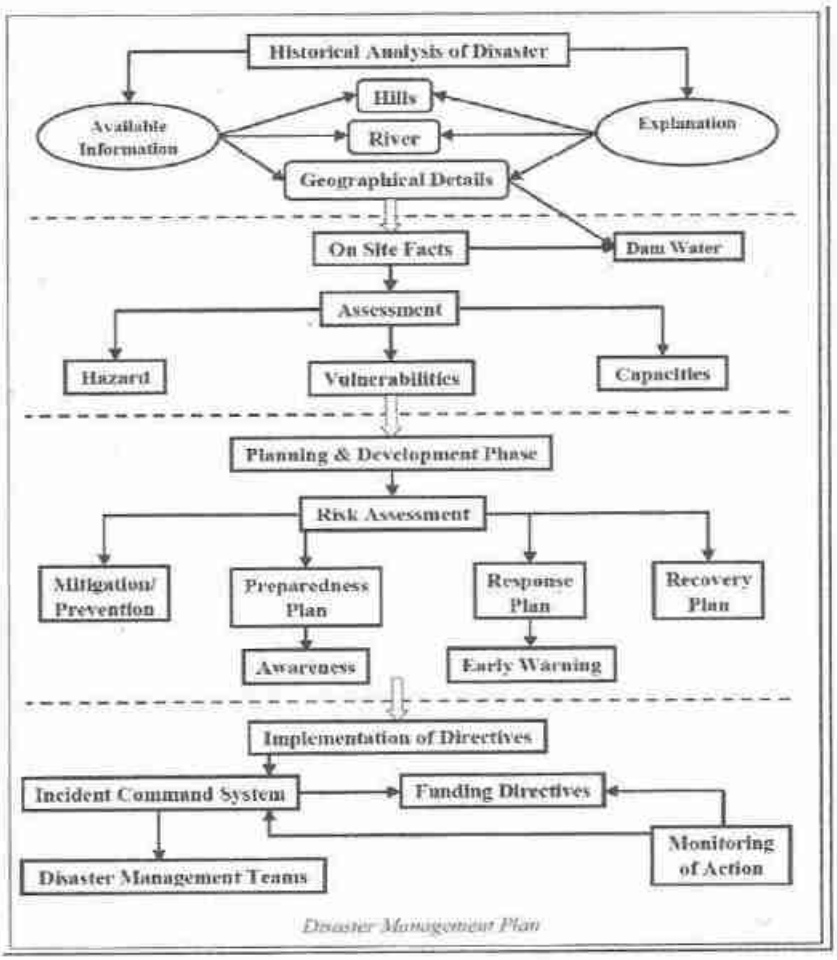

Disaster Management Plan

District Disaster Management Plan (DDMP)

The objective of the District Disaster Management Plan (DDMP) is to devise a set of guidelines for Distrit level disaster preparedness, prevention, mitigation and monitoring which will grow into becoming a well – defined protocol for disaster management that will be updated periodically. Every line department in the District will need to prepare their own Disaster Management Plans. The Emergency Support function s of various departments will be listed out in the plan. An inventory of resources in the district will be listed oput. All of this will converge into the state plan and mesh into one another. while the District Disaster Management Plan will form the framework for the entire district, it will be fine-tuned further by requirements of individual district units and emergency situation.

District Disaster Management Plan.-

1) Comprehensive flood protection strategies with reference to Gedilam river, Gomuki, Manimukthar River and 19 coastal habitations in the district prone to flood.
2) Building self-reliant coastal communities and empower them to manage their livelihoods in a sustainable manner.
3) Long term comprehensive pre and post disaster management programs linked to developmental activities.
4) De-centralize the decision making authority to the field level line department officials.
5) Participatory Management.
6) Increasing the awareness of long-term impact of relief program on development potential.
7) Emphasis on quality management of Relief measures.
8) Enhance the resilience of farmers to face the Vagaries of monsoon in rainfed areas.
9) To maintain the database capturing all the past experiences like Tsunami, Flood, Cyclone, Drought in the district.

10) To convene the meeting of District Disaster Management Authority for every quarter to discuss the preparedness of the line departments to meet any disasters.

11) Provide information about the rainfall, heat wave and other natural calamity to the public through District Emergency operation centre thereby to reduce the loss of lifes and property.

12) Proper Operation and Maintenance of VHF sets and Early Warning Systems installed in coastal habitations

13) Creating awareness through Mock Drills, communication drills regularly and periodically in association with line departments like Education, Health, Police, Fire and Rescue, SDRF, NDRF and SIRD trained CBDRM trainers.

14) Motivate the public about the importance of Water conservation works such as rain water harvesting, desilting of tanks and channels and kudimaramathu.

15) Effective implementation of G.O(Ms) No: 540 on Eviction of encroachments through Water Conservation and Water Management Committee and Encroachment Eviction Committee.

16) To avoid the construction of the buildings in low lying areas and to insist the Builders on the need to raise the construction site sufficiently thereby preventing the inundations during monsoons.

17) To reduce the direct disaster economic loss through Disaster Risk governance by identifying the vulnerable locations for various disaster and make the officials to realise their roles, their Hazard, Risk assessment and precautionary measures.

18) As a measure to reduce the damage to critical infrastructure and basic services, enabling the Highways, Police, Revenue, Fisheries and Fire & Rescue departments with latest equipments to handle disasters and vehicular traffic restoration immediately, and ensure that all infrastructure is built to withstand earthquake and floods and adequate engineering safety.

19) Effective utilization of Search, Rescue and Evacuation equipments of all the line departments.

20) Identify the list of swimmers, climbers and snake catchers for each of the vulnerable locations and update them in the district website.

21) To Develop local Disaster Risk Strategy through Sensitisation of all local body officials like Municipal Commissioners, Executive officers, Town panchayats and block development officers, Village level functionaries like VAO, VA and Panchayat clerk on their roles and responsibilities during disaster and understand the risk.

22) Sensitization of the officials of health department, Noon meal and anganwadi workers across the district on disaster management in particular Coastal areas.

23) Providing training to the Evacuation, Search and Rescue, Early warning, First aid and Shelter & Maintenance committee members in all 19 Coastal habitations.

24) Sensitise all the private institutions, hospitals, theatres, shopping malls and educational institutions on the need for a disaster contingency plan to tackle any major disaster.

25) To form the Inter Departmental Zonal Teams to oversee the preparatory works of pre and post disaster.

26) To Enhance international cooperation in relief operations by sharing the local technical and the traditional expertise.

27) To Successfully implement of Community based disaster risk management Project.

28) To identify all the Blackspots in the National Highways and make them accident free zones in the district.

29) To identify the places where fatal accidents occurred and provide them with Rubble strips, providing Barricades caution Boards etc, to alert the drivers of vehicles.

30) To provide double speed Brakers in all the sub – roads connecting the National Highways to reduce accidents.

31) To identify the major junctions in the National Highways and send proposals for Bridges construction like Road over Bridge /Road under Bridge as per their need.

32) To Create awareness among the explosive license owners by sensitizing them on the directions of sale and manufacturing procedures, the impact on lives and on economy in case of any explosive accident.

33) To issue proper instructions to Tamil Nadu Electricity Board to monitor the use of electric fencing if any used in the agricultural lands and sensitize the public to reduce their use.

34) A plan to increase the capacity of the Vidur Reservoir from existing 14.061 M.Cum to its original 17.136 M Cum by desiltation of 30,80,000 cu.m. that may cost around Rs.22.94 Cr. Proposal is under progress. This will be helpful to irrigate the entire 3200 acres ayacut and feed 8 Tanks.

35) A plan to increase the capacity of the Gomuki Nadhi Project Dam from existing 12.95 M.Cum to its original 15.86 M Cum by desiltation of 29,10,000 cu.m. that may cost around Rs.27.14 Cr. Proposal is under progress. This will be helpful to irrigate the entire 10860 acres ayacut and feed 37 Tanks.

36) A plan to increase the capacity of the Manimuktha Nadhi Project Dam from existing 18.27 M.Cum to its original 20.88 M Cum by desiltation 26,10,000 cu.m. that may cost around Rs.24.34 Cr. Proposal is under progress. This will be helpful to irrigate the whole 5493 acres ayacut and feed 5 Tanks.

37) A plan to increase the capacity of the Malattar River Project from existing 750 M to its original 347 Km Cum by desiltation 2225.81 Ha. that may cost around Rs.9.00 Cr. Proposal is under progress. This will be helpful to irrigate the actual 5000 acres ayacut and feed 13 Tanks.

38) A plan to increase the capacity of the Sornavur Anicut designed discharge of this anicut 5098.88 Cu.M that may cost around Rs.9.75 Cr. Proposal is under progress. This will be helpful to irrigate the actual 6053 acres ayacut and feed 8 Tanks.

39) Implementing Rain Water Harvesting techniques through Pit and Power Sump creation in the upcoming New Law College Buildings and New formation bifurcated Three Taluk Offices viz, Marakkanam, Melmalaiyanur, Kandachipuram (New Public Buildings)

40) To Maintain surface water quality and protect surface water bodies.

41) To Train local volunteers in Rain Water Harvesting at reduced costs. Encourage the use of any roofing material for the collection of rain water for household purpose.

42) Rainwater Harvesting process has an inherant tendency to arrest seawater ingress in coastal areas. They have also enhanced the yield of open wells, bore well and pumbs. It also improves the ground water quality by elimination of harmful chemicals and salts.

25. Details of the occupational Health issues:

RNTCP Tuberculosis Register Case

Sl. No.	Year	Total Case
1	2014	4931
2	2015	4527
3	2016	4669
4	2017	4534
5	2018	4647

Silicosis : -- Nil--

26. Plantation and Green Belt development in respect of leases already granted in the district.

It is necessary to develop Green Belt in and around the polluted site with suitable species to reduce the air pollution effectively. Implementation of afforestation program is of paramount importance. In addition to augmenting existing vegetation, it also checks soil erosion, make the ecosystem more complex and functionally more stable and make the climate more conductive.

27. Any other information

-NIL-

27/5/19

Assistant Director
Geology and Mining,
Viluppuram.

27/5/2019

District Collector
Viluppuram.

இணைப்பு-8

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2117

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2117	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	05.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	65.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	31.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	7.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2118	Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2118	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	05.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	54.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	26.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2119

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2119	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	06.03.2024	Test Completed on	16.03.2024
Temperature	34°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2120

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2120	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	06.03.2024	Test Completed on	16.03.2024
Temperature	34°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2121

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2121	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	07.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	50.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2122

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2122	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	07.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2123

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2123	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	08.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	26%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2124	Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2124	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	08.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	26%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	45.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2125

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2125	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	09.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	53.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	26.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2126

Report Date.	16.02.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2126	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	09.03.2024	Test Completed on	16.03.2024
Temperature	36°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2127

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2127	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	10.03.2024	Test Completed on	16.03.2024
Temperature	35°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2128

Report Date.	16.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2128	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	10.03.2024	Test Completed on	16.03.2024
Temperature	35°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2191

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2191	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	12.03.2024	Test Completed on	23.03.2024
Temperature	36°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2192

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2192	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	12.03.2024	Test Completed on	23.03.2024
Temperature	36°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2193

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2193	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	13.03.2024	Test Completed on	23.03.2024
Temperature	36°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2194

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2194	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	13.03.2024	Test Completed on	23.03.2024
Temperature	36°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	45.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

END OF THE REPORT

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2195	Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2195	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	14.03.2024	Test Completed on	23.03.2024
Temperature	37°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2196

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2196	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	14.03.2024	Test Completed on	23.03.2024
Temperature	37°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2197	Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2197	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	15.03.2024	Test Completed on	23.03.2024
Temperature	37°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	40.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2198	Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2198	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	15.03.2024	Test Completed on	23.03.2024
Temperature	37°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	37.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	14.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2199

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2199	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	16.03.2024	Test Completed on	23.03.2024
Temperature	36°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2200

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2200	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	16.03.2024	Test Completed on	23.03.2024
Temperature	36°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2201

Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2201	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	17.03.2024	Test Completed on	23.03.2024
Temperature	35°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2202	Report Date.	23.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2202	Sample Received on	18.03.2024
Sample Collected by	LABORATORY	Test Commenced on	18.03.2024
Sample Collected on	17.03.2024	Test Completed on	23.03.2024
Temperature	35°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd * Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2265

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2265	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	19.03.2024	Test Completed on	30.03.2024
Temperature	36°C	Relative Humidity	29%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	67.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	32.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	7.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2266	Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2266	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	19.03.2024	Test Completed on	30.03.2024
Temperature	36°C	Relative Humidity	29%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	59.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	28.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	7.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2267

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2267	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	20.03.2024	Test Completed on	30.03.2024
Temperature	36°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	62.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	30.0	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2268

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2268	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	20.03.2024	Test Completed on	30.03.2024
Temperature	36°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	56.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	27.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2269

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2269	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	21.03.2024	Test Completed on	30.03.2024
Temperature	34°C	Relative Humidity	43%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2270

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2270	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	21.03.2024	Test Completed on	30.03.2024
Temperature	34°C	Relative Humidity	43%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2271

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2271	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	22.03.2024	Test Completed on	30.03.2024
Temperature	36°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	38.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2272	Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2272	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	22.03.2024	Test Completed on	30.03.2024
Temperature	36°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	36.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	17.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2273

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2273	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	23.03.2024	Test Completed on	30.03.2024
Temperature	37°C	Relative Humidity	26%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2274

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2274	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	23.03.2024	Test Completed on	30.03.2024
Temperature	37°C	Relative Humidity	26%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	5.19	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2275

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2275	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	24.03.2024	Test Completed on	30.03.2024
Temperature	38°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2276

Report Date.	30.03.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2276	Sample Received on	25.03.2024
Sample Collected by	LABORATORY	Test Commenced on	25.03.2024
Sample Collected on	24.03.2024	Test Completed on	30.03.2024
Temperature	38°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2339

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2339	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	26.03.2024	Test Completed on	06.04.2024
Temperature	37°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2340

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2340	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	26.03.2024	Test Completed on	06.04.2024
Temperature	37°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2341

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2341	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	27.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2342

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2342	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	27.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2343

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2343	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	28.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	45.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2344

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2344	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	28.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.0	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2345	Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2345	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	29.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2346

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2346	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	29.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2347

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2347	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	30.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	56.0	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	26.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2348

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2348	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	30.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2349

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2349	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	31.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	59.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	28.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2350

Report Date.	06.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2350	Sample Received on	01.04.2024
Sample Collected by	LABORATORY	Test Commenced on	01.04.2024
Sample Collected on	31.03.2024	Test Completed on	06.04.2024
Temperature	38°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2413

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2413	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	02.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	20%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2414

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2414	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	02.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	20%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2415

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2415	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	03.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2416

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2416	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	03.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	38.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2417

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2417	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	04.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	36.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	17.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	5.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2418

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2418	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	04.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	35.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	16.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	5.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2419

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2419	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	05.04.2024	Test Completed on	13.04.2024
Temperature	41°C	Relative Humidity	18%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2420

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2420	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	05.04.2024	Test Completed on	13.04.2024
Temperature	41°C	Relative Humidity	18%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2421

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2421	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	06.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	20%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	37.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	5.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2422

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2422	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	06.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	20%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2423

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2423	Sample Received on	08.04.2024
Sample Collected by	LABORATORY	Test Commenced on	08.04.2024
Sample Collected on	07.04.2024	Test Completed on	13.04.2024
Temperature	40°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2424

Report Date.	13.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2424	Sample Received on	11.03.2024
Sample Collected by	LABORATORY	Test Commenced on	11.03.2024
Sample Collected on	07.04.2024	Test Completed on	16.03.2024
Temperature	40°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2487

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2487	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	09.04.2024	Test Completed on	20.04.2024
Temperature	36°C	Relative Humidity	34%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2488

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2488	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	09.04.2024	Test Completed on	20.04.2024
Temperature	36°C	Relative Humidity	34%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	45.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2489

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2489	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	10.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2490

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2490	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	10.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	30%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2491

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2491	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	11.04.2024	Test Completed on	20.04.2024
Temperature	38°C	Relative Humidity	29%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	37.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	5.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2492	Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2492	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	11.04.2024	Test Completed on	20.04.2024
Temperature	38°C	Relative Humidity	29%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	36.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	17.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	5.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2493

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2493	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	12.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	37%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2494

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2494	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	12.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	37%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	38.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2495

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2495	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	13.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	36%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2496

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2496	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	13.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	36%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	40.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2497

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2497	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	14.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2498

Report Date.	20.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2498	Sample Received on	15.04.2024
Sample Collected by	LABORATORY	Test Commenced on	15.04.2024
Sample Collected on	14.04.2024	Test Completed on	20.04.2024
Temperature	37°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2561

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2561	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	16.04.2024	Test Completed on	27.04.2024
Temperature	38°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	56.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	27.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2562

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2562	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	16.04.2024	Test Completed on	27.04.2024
Temperature	38°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	50.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

END OF THE REPORT

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2563

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2563	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	17.04.2024	Test Completed on	27.04.2024
Temperature	40°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	60.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	30.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2564

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2564	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	17.04.2024	Test Completed on	27.04.2024
Temperature	40°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	53.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	28.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2565

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2565	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	18.04.2024	Test Completed on	27.04.2024
Temperature	40°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2566

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2566	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	18.04.2024	Test Completed on	27.04.2024
Temperature	40°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2567

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2567	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	19.04.2024	Test Completed on	27.04.2024
Temperature	40°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2568	Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2568	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	19.04.2024	Test Completed on	27.04.2024
Temperature	40°C	Relative Humidity	28%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2569

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2569	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	20.04.2024	Test Completed on	27.04.2024
Temperature	42°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	50.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	26.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2570

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2570	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	20.04.2024	Test Completed on	27.04.2024
Temperature	42°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2571

Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2571	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	21.04.2024	Test Completed on	27.04.2024
Temperature	41°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2572	Report Date.	27.04.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2572	Sample Received on	22.04.2024
Sample Collected by	LABORATORY	Test Commenced on	22.04.2024
Sample Collected on	21.04.2024	Test Completed on	27.04.2024
Temperature	41°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2635

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2635	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	23.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2636

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2636	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	23.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2637

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2637	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	24.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2638

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2638	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	24.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2639

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2639	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	25.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2640

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2640	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	25.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	25%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2641

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2641	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	26.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2642

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2642	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	26.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2643

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2643	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	27.04.2024	Test Completed on	04.05.2024
Temperature	39°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.0	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2644

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2644	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	27.04.2024	Test Completed on	04.05.2024
Temperature	39°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2645

Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2645	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	28.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	26%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	54.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	26.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2646	Report Date.	04.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2646	Sample Received on	29.04.2024
Sample Collected by	LABORATORY	Test Commenced on	29.04.2024
Sample Collected on	28.04.2024	Test Completed on	04.05.2024
Temperature	40°C	Relative Humidity	26%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	50.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.0	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2709

Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2709	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	30.04.2024	Test Completed on	11.05.2024
Temperature	41°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2710

Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2710	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	30.04.2024	Test Completed on	11.05.2024
Temperature	41°C	Relative Humidity	21%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2711

Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2711	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	02.05.2024	Test Completed on	11.05.2024
Temperature	43°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	63.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	30.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	7.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2712

Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2712	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	02.05.2024	Test Completed on	11.05.2024
Temperature	43°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2713

Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2713	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	02.05.2024	Test Completed on	11.05.2024
Temperature	43°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.6	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2714	Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2714	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	02.05.2024	Test Completed on	11.05.2024
Temperature	43°C	Relative Humidity	23%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	42.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2715	Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2715	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	03.05.2024	Test Completed on	11.05.2024
Temperature	42°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2716	Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2716	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	03.05.2024	Test Completed on	11.05.2024
Temperature	42°C	Relative Humidity	22%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2717

Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2717	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	04.05.2024	Test Completed on	11.05.2024
Temperature	42°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	49.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2718	Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2718	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	04.05.2024	Test Completed on	11.05.2024
Temperature	42°C	Relative Humidity	27%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	53.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2719

Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2719	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	05.05.2024	Test Completed on	11.05.2024
Temperature	42°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2720	Report Date.	11.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2720	Sample Received on	06.05.2024
Sample Collected by	LABORATORY	Test Commenced on	06.05.2024
Sample Collected on	05.05.2024	Test Completed on	11.05.2024
Temperature	42°C	Relative Humidity	24%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	50.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2783

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2783	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	07.05.2024	Test Completed on	18.05.2024
Temperature	41°C	Relative Humidity	29%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	36.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2784	Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2784	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	07.05.2024	Test Completed on	18.05.2024
Temperature	41°C	Relative Humidity	29%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2785

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2785	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	08.05.2024	Test Completed on	18.05.2024
Temperature	24°C	Relative Humidity	88%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	38.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.0	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2786

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2786	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	08.05.2024	Test Completed on	18.05.2024
Temperature	24°C	Relative Humidity	88%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2787

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2787	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	09.05.2024	Test Completed on	18.05.2024
Temperature	39°C	Relative Humidity	31%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	37.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	5.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2788

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2788	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	09.05.2024	Test Completed on	18.05.2024
Temperature	39°C	Relative Humidity	31%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	35.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	17.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	5.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2789

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2789	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	10.05.2024	Test Completed on	18.05.2024
Temperature	39°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	39.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	19.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2790

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2790	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	10.05.2024	Test Completed on	18.05.2024
Temperature	39°C	Relative Humidity	32%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	37.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	18.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	3.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2791

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2791	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	11.05.2024	Test Completed on	18.05.2024
Temperature	38°C	Relative Humidity	36%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	57.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	27.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2792	Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2792	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	11.05.2024	Test Completed on	18.05.2024
Temperature	38°C	Relative Humidity	36%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	56.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	30.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2793

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2793	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	12.05.2024	Test Completed on	18.05.2024
Temperature	39°C	Relative Humidity	33%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.8	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2794

Report Date.	18.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2794	Sample Received on	13.05.2024
Sample Collected by	LABORATORY	Test Commenced on	13.05.2024
Sample Collected on	12.05.2024	Test Completed on	18.05.2024
Temperature	39°C	Relative Humidity	33%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	45.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2857

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2857	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	14.05.2024	Test Completed on	25.05.2024
Temperature	38°C	Relative Humidity	35%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	60.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	28.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2858

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2858	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	14.05.2024	Test Completed on	25.05.2024
Temperature	38°C	Relative Humidity	35%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.3	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2859

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2859	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	15.05.2024	Test Completed on	25.05.2024
Temperature	35°C	Relative Humidity	44%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.4	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2860

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2860	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	15.05.2024	Test Completed on	25.05.2024
Temperature	35°C	Relative Humidity	44%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2861

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2861	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	16.05.2024	Test Completed on	25.05.2024
Temperature	29°C	Relative Humidity	65%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2862

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2862	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	16.05.2024	Test Completed on	25.05.2024
Temperature	29°C	Relative Humidity	65%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2863

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2863	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	17.05.2024	Test Completed on	25.05.2024
Temperature	34°C	Relative Humidity	47%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	52.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2864

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu.
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2864	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	17.05.2024	Test Completed on	25.05.2024
Temperature	34°C	Relative Humidity	47%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	48.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2865

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2865	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	18.05.2024	Test Completed on	25.05.2024
Temperature	36°C	Relative Humidity	40%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	45.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.6	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.9	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.9	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2866

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2866	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	18.05.2024	Test Completed on	25.05.2024
Temperature	36°C	Relative Humidity	40%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	51.4	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.1	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2867

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2867	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	19.05.2024	Test Completed on	25.05.2024
Temperature	34°C	Relative Humidity	49%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.5	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/2868

Report Date.	25.05.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-2868	Sample Received on	20.05.2024
Sample Collected by	LABORATORY	Test Commenced on	20.05.2024
Sample Collected on	19.05.2024	Test Completed on	25.05.2024
Temperature	34°C	Relative Humidity	49%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	47.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.4	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.4	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3004

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3004	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	21.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	41%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.5	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3005

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3005	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	21.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	41%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	50.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.7	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3006

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A5-Ravanapuram
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3006	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	22.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	42%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.1	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3007

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A6-Tennampundi
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3007	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	22.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	42%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	53.1	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	25.0	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	9.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3008

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3008	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	23.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	45%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	45.8	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	22.3	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.0	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3009

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3009	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	23.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	45%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	46.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	23.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3010

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A3-Senalur
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3010	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	24.05.2024	Test Completed on	01.06.2024
Temperature	30°C	Relative Humidity	68%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	43.7	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	21.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3011

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A4-Kunnapakkam
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3011	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	24.05.2024	Test Completed on	01.06.2024
Temperature	30°C	Relative Humidity	68%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	40.9	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.5	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3012

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3012	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	25.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	40%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	50.5	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	24.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	5.7	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.1	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3013

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3013	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	25.05.2024	Test Completed on	01.06.2024
Temperature	36°C	Relative Humidity	40%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	54.6	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	26.9	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	6.6	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	8.3	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3014

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A1-PROPOSED MINE LEASE AREA
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3014	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Temperature	38°C	Relative Humidity	33%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	44.2	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.8	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.8	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	7.2	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45.

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3015

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	AMBIENT AIR QUALITY
Sampling Procedure	IS – 5182 (Part – 14: 2000 & Part – V: Reaffirmed - 2003), CPCB Guide lines

Sample Location	A2-Nalmukkal
Positioned height of Sampler	1.5 M above Ground Level

Customer Reference	By Mail	Sampling Duration	24 hrs
Sample Reference No	SARL/A/CHE-3015	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Temperature	38°C	Relative Humidity	33%
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results	*Limits
1	Particulate Matter less than 10micron size (PM_{10})	IS:5182: Part 23:2006	$\mu g/m^3$	41.3	100
2	Particulate Matter less than 2.5micron size ($PM_{2.5}$)	IS 5182 (Part 24):2019	$\mu g/m^3$	20.2	60
3	Sulphur dioxide (SO_2)	IS:5182: Part 02:2001	$\mu g/m^3$	4.2	80
4	Nitrogen Dioxide (NO_2)	IS:5182: Part 06:2006	$\mu g/m^3$	6.7	80
5	Carbon monoxide (CO)	SARL/IOP/013 (Issue No:01, Issue Date – 01.03.2023)	mg/m^3	BDL (D.L – 1.1)	-

Remarks: Limits: *National Ambient air quality standards from CPCB. BDL- Below detectable limit. DL –Detectable limit

.

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3028

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	NOISE LEVEL DATA

Customer Reference	As per work order	Sampling Method	SARL/IOP/023
Sample Reference No	SARL/N/CHE-3028	Date of Monitoring	25.05.2024/ 26.05.2024
Sample Collected by	LABORATORY		

Time in hrs	N1	N2	N3	N4	N5	N6
06.00	37.7	42.7	39.8	41.7	43.2	42.2
07.00	37.9	45.5	40.6	39.4	45.5	44.2
08.00	38.7	53.7	45.8	42.7	45.7	44.0
09.00	38.1	50.7	50.7	43.5	50.1	41.9
10.00	41.4	48.5	50.4	51.1	47.9	40.1
11.00	39.6	51.6	49.0	58.1	47.3	39.8
12.00	41.6	49.3	47.2	47.0	46.2	43.6
13.00	38.2	51.6	47.0	47.8	44.4	44.3
14.00	37.5	50.6	48.3	53.4	46.2	46.7
15.00	35.6	50.9	47.4	54.5	48.3	52.8
16.00	38.9	51.9	50.3	52.1	46.0	45.0
17.00	42.8	52.1	50.8	51.8	48.1	46.0
18.00	40.0	51.9	51.9	49.7	44.0	44.5
19.00	37.4	49.7	46.9	46.3	50.4	43.2
20.00	36.5	49.5	46.2	45.5	43.3	45.1
21.00	40.0	47.7	44.0	43.8	42.2	44.6
22.00	38.4	46.0	40.0	45.3	41.1	44.1
23.00	38.8	43.1	39.1	43.3	39.5	44.5
24.00	39.1	40.7	40.1	41.1	40.6	44.4
01.00	39.4	38.8	38.8	42.7	39.6	41.6
02.00	38.2	39.1	39.0	41.6	38.5	40.2
03.00	37.0	41.9	39.7	40.7	40.8	39.5
04.00	34.4	40.6	40.4	39.9	41.6	37.8
05.00	36.5	38.9	40.7	39.4	42.9	37.5

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3028

Report Date.	01.06.2024

	N1	N2	N3	N4	N5	N6
DAY EQUIVALENT	**39.3**	**50.5**	**48.3**	**50.9**	**46.8**	**45.5**
NIGHT EQUIVALENT	**38.0**	**41.8**	**39.8**	**42.2**	**40.8**	**42.0**
DAY & NIGHT EQUIVALENT	**38.9**	**49.0**	**46.9**	**49.4**	**45.6**	**44.6**

Remarks:

LOCATIONS:

N1-PROPOSED MINE LEASE AREA
N2-Nalmukkal
N3-Senalur
N4-Kunnapakkam
N5-Ravanapuram
N6-Tennampundi

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd. Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3022	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	SOIL
Sample Mark	S1-PROPOSED MINE LEASE AREA

Customer Reference	By Mail	Sampling Procedure	-
Sample Reference No	SARL/SO/CHE-3022	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results
1	pH at 25 °C	IS 2720: Part 26: 1987	-	5.94
2	Electrical Conductivity	IS 14767: 2000	µmhos/cm	70.24
3	Dry matter content	IS 15106: 2002	%	91.06
4	Water Content	IS 15106: 2002	%	8.94
5	Organic Matter	IS 2720: Part 22: 1972	%	1.63
6	Nitrogen and Nitrogenous compounds	IS 14684: 1999	mg/kg	212
7	Soil Texture	Methods Manual - Soil testing in India - P. No-67: 2011	%	LOAM
8	Grain Size Distribution i. Sand	Methods Manual - Soil testing in India - P. No-67: 2011	%	36.95
	ii. Silt	Methods Manual - Soil testing in India - P. No-67: 2011	%	53.74
	iii. Clay	Methods Manual - Soil testing in India - P. No-67: 2011	%	9.31
9	Phosphorus as P	IS 10158: 1982	mg/kg	1.21
10	Sodium as Na	USEPA 3050 B: 1996	mg/kg	845
11	Potassium as K	USEPA 3050 B: 1996	mg/kg	412
12	Total soluble sulphates	IS 2720: Part 27: 1977	%	BDL (D.L.0.02)
13	Porosity	SARL/SOP/SO/001 (Issue No:01, Issue Date – 01.03.2023): 2023	%	12.50
14	Water holding capacity	Methods Manual - Soil testing in India - P. No-76: 2011	Inches/foot	42

BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3023	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	SOIL
Sample Mark	S2-Nalmukkal

Customer Reference	By Mail	Sampling Procedure	-
Sample Reference No	SARL/SO/CHE-3023	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results
1	pH at 25 °C	IS 2720: Part 26: 1987	-	7.68
2	Electrical Conductivity	IS 14767: 2000	µmhos/cm	492.7
3	Dry matter content	IS 15106: 2002	%	88.49
4	Water Content	IS 15106: 2002	%	11.51
5	Organic Matter	IS 2720: Part 22: 1972	%	2.30
6	Nitrogen and Nitrogenous compounds	IS 14684: 1999	mg/kg	260
7	Soil Texture	Methods Manual - Soil testing in India - P. No-67: 2011	%	LOAM
8	Grain Size Distribution i. Sand	Methods Manual - Soil testing in India - P. No-67: 2011	%	4.89
	ii. Silt	Methods Manual - Soil testing in India - P. No-67: 2011	%	57.45
	iii. Clay	Methods Manual - Soil testing in India - P. No-67: 2011	%	66.25
9	Phosphorus as P	IS 10158: 1982	mg/kg	28.86
10	Sodium as Na	USEPA 3050 B: 1996	mg/kg	0.59
11	Potassium as K	USEPA 3050 B: 1996	mg/kg	921
12	Total soluble sulphates	IS 2720: Part 27: 1977	%	BDL (D.L.0.02)
13	Porosity	SARL/SOP/SO/001 (Issue No:01, Issue Date – 01.03.2023): 2023	%	13.1
14	Water holding capacity	Methods Manual - Soil testing in India - P. No-76: 2011	Inches/foot	45.6

BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3024

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	SOIL
Sample Mark	S3-Senalur

Customer Reference	By Mail	Sampling Procedure	-
Sample Reference No	SARL/SO/CHE-3024	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results
1	pH at 25 °C	IS 2720: Part 26: 1987	-	7.03
2	Electrical Conductivity	IS 14767: 2000	µmhos/cm	100.8
3	Dry matter content	IS 15106: 2002	%	90.40
4	Water Content	IS 15106: 2002	%	9.60
5	Organic Matter	IS 2720: Part 22: 1972	%	1.71
6	Nitrogen and Nitrogenous compounds	IS 14684: 1999	mg/kg	312
7	Soil Texture	Methods Manual - Soil testing in India - P. No-67: 2011	%	CLAY LOAM
8	Grain Size Distribution i. Sand	Methods Manual - Soil testing in India - P. No-67: 2011	%	41.47
	ii. Silt	Methods Manual - Soil testing in India - P. No-67: 2011	%	50.41
	iii. Clay	Methods Manual - Soil testing in India - P. No-67: 2011	%	8.12
9	Phosphorus as P	IS 10158: 1982	mg/kg	1.03
10	Sodium as Na	USEPA 3050 B: 1996	mg/kg	976
11	Potassium as K	USEPA 3050 B: 1996	mg/kg	724
12	Total soluble sulphates	IS 2720: Part 27: 1977	%	BDL (D.L.0.02)
13	Porosity	SARL/SOP/SO/001 (Issue No:01, Issue Date – 01.03.2023): 2023	%	11.9
14	Water holding capacity	Methods Manual - Soil testing in India - P. No-76: 2011	Inches/foot	44

BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3025

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	SOIL
Sample Mark	S4-Kunnapakkam

Customer Reference	By Mail	Sampling Procedure	-
Sample Reference No	SARL/SO/CHE-3025	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results
1	pH at 25 °C	IS 2720: Part 26: 1987	-	6.99
2	Electrical Conductivity	IS 14767: 2000	µmhos/cm	150.7
3	Dry matter content	IS 15106: 2002	%	85.94
4	Water Content	IS 15106: 2002	%	14.06
5	Organic Matter	IS 2720: Part 22: 1972	%	1.59
6	Nitrogen and Nitrogenous compounds	IS 14684: 1999	mg/kg	405
7	Soil Texture	Methods Manual - Soil testing in India - P. No-67: 2011	%	SILT LOAM
8	Grain Size Distribution i. Sand	Methods Manual - Soil testing in India - P. No-67: 2011	%	6.56
	ii. Silt	Methods Manual - Soil testing in India - P. No-67: 2011	%	42.69
	iii. Clay	Methods Manual - Soil testing in India - P. No-67: 2011	%	43.60
9	Phosphorus as P	IS 10158: 1982	mg/kg	1.22
10	Sodium as Na	USEPA 3050 B: 1996	mg/kg	732
11	Potassium as K	USEPA 3050 B: 1996	mg/kg	456
12	Total soluble sulphates	IS 2720: Part 27: 1977	%	BDL (D.L.0.02)
13	Porosity	SARL/SOP/SO/001 (Issue No:01, Issue Date – 01.03.2023): 2023	%	12.6
14	Water holding capacity	Methods Manual - Soil testing in India - P. No-76: 2011	Inches/foot	49

BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3026	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	SOIL
Sample Mark	S5-Ravanapuram

Customer Reference	By Mail	Sampling Procedure	-
Sample Reference No	SARL/SO/CHE-3026	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results
1	pH at 25 °C	IS 2720: Part 26: 1987	-	8.14
2	Electrical Conductivity	IS 14767: 2000	µmhos/cm	214.0
3	Dry matter content	IS 15106: 2002	%	88.09
4	Water Content	IS 15106: 2002	%	11.91
5	Organic Matter	IS 2720: Part 22: 1972	%	0.68
6	Nitrogen and Nitrogenous compounds	IS 14684: 1999	mg/kg	168
7	Soil Texture	Methods Manual - Soil testing in India - P. No-67: 2011	%	SANDY CLAY LOAM
8	Grain Size Distribution i. Sand	Methods Manual - Soil testing in India - P. No-67: 2011	%	4.27
	ii. Silt	Methods Manual - Soil testing in India - P. No-67: 2011	%	44.48
	iii. Clay	Methods Manual - Soil testing in India - P. No-67: 2011	%	62.07
9	Phosphorus as P	IS 10158: 1982	mg/kg	0.74
10	Sodium as Na	USEPA 3050 B: 1996	mg/kg	610
11	Potassium as K	USEPA 3050 B: 1996	mg/kg	795
12	Total soluble sulphates	IS 2720: Part 27: 1977	%	BDL (D.L.0.02)
13	Porosity	SARL/SOP/SO/001 (Issue No:01, Issue Date – 01.03.2023): 2023	%	13.6
14	Water holding capacity	Methods Manual - Soil testing in India - P. No-76: 2011	Inches/foot	46

BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/24/3027	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	SOIL
Sample Mark	S6-Tennampundi

Customer Reference	By Mail	Sampling Procedure	-
Sample Reference No	SARL/SO/CHE-3027	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

S. No.	Parameters	Protocol	Unit	Results
1	pH at 25 °C	IS 2720: Part 26: 1987	-	8.73
2	Electrical Conductivity	IS 14767: 2000	µmhos/cm	509.8
3	Dry matter content	IS 15106: 2002	%	91.15
4	Water Content	IS 15106: 2002	%	8.85
5	Organic Matter	IS 2720: Part 22: 1972	%	0.80
6	Nitrogen and Nitrogenous compounds	IS 14684: 1999	mg/kg	340
7	Soil Texture	Methods Manual - Soil testing in India - P. No-67: 2011	%	CLAY LOAM
8	Grain Size Distribution i. Sand	Methods Manual - Soil testing in India - P. No-67: 2011	%	5.78
	ii. Silt	Methods Manual - Soil testing in India - P. No-67: 2011	%	47.66
	iii. Clay	Methods Manual - Soil testing in India - P. No-67: 2011	%	55.84
9	Phosphorus as P	IS 10158: 1982	mg/kg	0.82
10	Sodium as Na	USEPA 3050 B: 1996	mg/kg	1002
11	Potassium as K	USEPA 3050 B: 1996	mg/kg	669
12	Total soluble sulphates	IS 2720: Part 27: 1977	%	BDL (D.L.0.02)
13	Porosity	SARL/SOP/SO/001 (Issue No:01, Issue Date – 01.03.2023): 2023	%	13.2
14	Water holding capacity	Methods Manual - Soil testing in India - P. No-76: 2011	Inches/foot	48

BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd
416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3016	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	WATER
Sample Mark	W1-PROPOSED MINE LEASE AREA

Customer Reference	By Mail	Sampling Procedure	IS 17614: Part 14: 2021
Sample Reference No	SARL/W/CHE-3016	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

Sl. No.	Parameters	Protocol	Unit	Result	*Limits Permissible
A.	**Physical parameters**				
1	Odour	IS 3025 (Part 5): 2018	-	Agreeable	Agreeable
2	Turbidity	APHA 24th Edition 2130 B: 2023	NTU	<1.0	5.0
3	pH at 25 ˚C	APHA 24th Edition 4500 – H+ B: 2023	-	7.17	6.50-8.50
4	Electrical Conductivity	APHA 24th Edition 2510 B: 2023	(µS/cm)	949.9	-
B.	**Chemical parameters**				
5	Total Dissolved Solids	APHA 24th Edition 2540-C: 2023	mg/L	570	2000
6	Total hardness (as CaCO3)	APHA 24th Edition 2340 C: 2023	mg/L	372	600
7	Calcium (as Ca)	IS 3025 (Part 40): 1991	mg/L	106	200
8	Magnesium (as Mg)	IS 3025 (Part 46): 1994	mg/L	25.7	100
9	Calcium Hardness (as CaCO3)	APHA 24th Edition 3500 Ca B: 2023	mg/L	265	-
10	Magnesium Hardness (as CaCO3)	APHA 24th Edition 3500 Mg B: 2023	mg/L	107	-
11	Total alkalinity (as CaCO3)	APHA 24th Edition 2320 B: 2023	mg/L	303	600
12	Chloride (as Cl)	APHA 24th Edition 4500 Cl- B: 2023	mg/L	139	1000

Shrient Analytical and Research Labs Pvt. Ltd
416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3016

Report Date.	01.06.2024

Sl. No.	Parameters	Protocol	Unit	Result	*Limits
					Permissible
13	Free Residual chlorine	APHA 24th Edition 4500 Cl- B: 2023	mg/L	BDL (D.L - 0.2)	1.0
14	Sulphate as (SO42-)	APHA 24th Edition 4500 SO42- E: 2023	mg/L	97.0	400
15	Iron (as Fe)	APHA 24th Edition 3500 Fe B: 2023	mg/L	0.05	0.3
16	Nitrate (as NO3)	IS 3025 (Part 34): 1988	mg/L	2.39	45
17	Fluoride (as F)	APHA 24th Edition 4500 F- D: 2023	mg/L	0.26	1.5
18	Manganese (as Mn)	APHA 24th Edition 3500 Mn B: 2023	mg/L	BDL (D.L - 0.05)	0.3

Remarks: *Drinking Water Specifications as per IS – 10500:2012. BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3017	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	WATER
Sample Mark	W2-Nalmukkal

Customer Reference	By Mail	Sampling Procedure	IS 17614: Part 14: 2021
Sample Reference No	SARL/W/CHE-3017	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

Sl. No.	Parameters	Protocol	Unit	Result	*Limits Permissible
A.	**Physical parameters**				
1	Odour	IS 3025 (Part 5): 2018	-	Agreeable	Agreeable
2	Turbidity	APHA 24th Edition 2130 B: 2023	NTU	<1.0	5.0
3	pH at 25 ˚C	APHA 24th Edition 4500 – H+ B: 2023	-	7.12	6.50-8.50
4	Electrical Conductivity	APHA 24th Edition 2510 B: 2023	(µS/cm)	1103	-
B.	**Chemical parameters**				
5	Total Dissolved Solids	APHA 24th Edition 2540-C: 2023	mg/L	666	2000
6	Total hardness (as CaCO3)	APHA 24th Edition 2340 C: 2023	mg/L	261	600
7	Calcium (as Ca)	IS 3025 (Part 40): 1991	mg/L	82.4	200
8	Magnesium (as Mg)	IS 3025 (Part 46): 1994	mg/L	13.3	100
9	Calcium Hardness (as CaCO3)	APHA 24th Edition 3500 Ca B: 2023	mg/L	206	-
10	Magnesium Hardness (as CaCO3)	APHA 24th Edition 3500 Mg B: 2023	mg/L	55	-
11	Total alkalinity (as CaCO3)	APHA 24th Edition 2320 B: 2023	mg/L	311	600
12	Chloride (as Cl)	APHA 24th Edition 4500 Cl- B: 2023	mg/L	194	1000

Shrient Analytical and Research Labs Pvt. Ltd
416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3017

Report Date.	01.06.2024

Sl. No.	Parameters	Protocol	Unit	Result	*Limits
					Permissible
13	Free Residual chlorine	APHA 24th Edition 4500 Cl- B: 2023	mg/L	BDL (D.L - 0.2)	1.0
14	Sulphate as (SO42-)	APHA 24th Edition 4500 SO42- E: 2023	mg/L	186	400
15	Iron (as Fe)	APHA 24th Edition 3500 Fe B: 2023	mg/L	0.06	0.3
16	Nitrate (as NO3)	IS 3025 (Part 34): 1988	mg/L	2.14	45
17	Fluoride (as F)	APHA 24th Edition 4500 F- D: 2023	mg/L	0.32	1.5
18	Manganese (as Mn)	APHA 24th Edition 3500 Mn B: 2023	mg/L	BDL (D.L - 0.05)	0.3

Remarks: *Drinking Water Specifications as per IS – 10500:2012. BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd * Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:
(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd
416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3018	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	WATER
Sample Mark	W3-Senalur

Customer Reference	By Mail	Sampling Procedure	IS 17614: Part 14: 2021
Sample Reference No	SARL/W/CHE-3018	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

Sl. No.	Parameters	Protocol	Unit	Result	*Limits Permissible
A.	**Physical parameters**				
1	Odour	IS 3025 (Part 5): 2018	-	Agreeable	Agreeable
2	Turbidity	APHA 24th Edition 2130 B: 2023	NTU	<1.0	5.0
3	pH at 25 ˚C	APHA 24th Edition 4500 – H+ B: 2023	-	7.12	6.50-8.50
4	Electrical Conductivity	APHA 24th Edition 2510 B: 2023	(µS/cm)	1058	-
B.	**Chemical parameters**				
5	Total Dissolved Solids	APHA 24th Edition 2540-C: 2023	mg/L	640	2000
6	Total hardness (as CaCO3)	APHA 24th Edition 2340 C: 2023	mg/L	376	600
7	Calcium (as Ca)	IS 3025 (Part 40): 1991	mg/L	63.4	200
8	Magnesium (as Mg)	IS 3025 (Part 46): 1994	mg/L	52.3	100
9	Calcium Hardness (as CaCO3)	APHA 24th Edition 3500 Ca B: 2023	mg/L	158	-
10	Magnesium Hardness (as CaCO3)	APHA 24th Edition 3500 Mg B: 2023	mg/L	218	-
11	Total alkalinity (as CaCO3)	APHA 24th Edition 2320 B: 2023	mg/L	412	600
12	Chloride (as Cl)	APHA 24th Edition 4500 Cl- B: 2023	mg/L	180.0	1000

Shrient Analytical and Research Labs Pvt. Ltd
416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3018

Report Date.	01.06.2024

Sl. No.	Parameters	Protocol	Unit	Result	*Limits
					Permissible
13	Free Residual chlorine	APHA 24th Edition 4500 Cl- B: 2023	mg/L	BDL (D.L - 0.2)	1.0
14	Sulphate as (SO42-)	APHA 24th Edition 4500 SO42- E: 2023	mg/L	89.2	400
15	Iron (as Fe)	APHA 24th Edition 3500 Fe B: 2023	mg/L	0.02	0.3
16	Nitrate (as NO3)	IS 3025 (Part 34): 1988	mg/L	1.69	45
17	Fluoride (as F)	APHA 24th Edition 4500 F- D: 2023	mg/L	0.44	1.5
18	Manganese (as Mn)	APHA 24th Edition 3500 Mn B: 2023	mg/L	BDL (D.L - 0.05)	0.3

Remarks: *Drinking Water Specifications as per IS – 10500:2012. BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

END OF THE REPORT

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd
416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3019	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	WATER
Sample Mark	W4-Kunnapakkam

Customer Reference	By Mail	Sampling Procedure	IS 17614: Part 14: 2021
Sample Reference No	SARL/W/CHE-3019	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

Sl. No.	Parameters	Protocol	Unit	Result	*Limits Permissible
A.	**Physical parameters**				
1	Odour	IS 3025 (Part 5): 2018	-	Agreeable	Agreeable
2	Turbidity	APHA 24th Edition 2130 B: 2023	NTU	<1.0	5.0
3	pH at 25 ˚C	APHA 24th Edition 4500 – H+ B: 2023	-	7.48	6.50-8.50
4	Electrical Conductivity	APHA 24th Edition 2510 B: 2023	(µS/cm)	1103	-
B.	**Chemical parameters**				
5	Total Dissolved Solids	APHA 24th Edition 2540-C: 2023	mg/L	670	2000
6	Total hardness (as CaCO3)	APHA 24th Edition 2340 C: 2023	mg/L	253	600
7	Calcium (as Ca)	IS 3025 (Part 40): 1991	mg/L	76.0	200
8	Magnesium (as Mg)	IS 3025 (Part 46): 1994	mg/L	15.2	100
9	Calcium Hardness (as CaCO3)	APHA 24th Edition 3500 Ca B: 2023	mg/L	190	-
10	Magnesium Hardness (as CaCO3)	APHA 24th Edition 3500 Mg B: 2023	mg/L	63.4	-
11	Total alkalinity (as CaCO3)	APHA 24th Edition 2320 B: 2023	mg/L	307	600
12	Chloride (as Cl)	APHA 24th Edition 4500 Cl- B: 2023	mg/L	196	1000

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3019

Report Date.	01.06.2024

Sl. No.	Parameters	Protocol	Unit	Result	*Limits
					Permissible
13	Free Residual chlorine	APHA 24th Edition 4500 Cl- B: 2023	mg/L	BDL (D.L - 0.2)	1.0
14	Sulphate as (SO42-)	APHA 24th Edition 4500 SO42- E: 2023	mg/L	179.0	400
15	Iron (as Fe)	APHA 24th Edition 3500 Fe B: 2023	mg/L	0.05	0.3
16	Nitrate (as NO3)	IS 3025 (Part 34): 1988	mg/L	3.64	45
17	Fluoride (as F)	APHA 24th Edition 4500 F- D: 2023	mg/L	0.41	1.5
18	Manganese (as Mn)	APHA 24th Edition 3500 Mn B: 2023	mg/L	BDL (D.L - 0.05)	0.3

Remarks: *Drinking Water Specifications as per IS – 10500:2012. BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd * Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3020	Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	WATER
Sample Mark	W5-Ravanapuram

Customer Reference	By Mail	Sampling Procedure	IS 17614: Part 14: 2021
Sample Reference No	SARL/W/CHE-3020	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

Sl. No.	Parameters	Protocol	Unit	Result	*Limits Permissible
A.	**Physical parameters**				
1	Odour	IS 3025 (Part 5): 2018	-	Agreeable	Agreeable
2	Turbidity	APHA 24th Edition 2130 B: 2023	NTU	<1.0	5.0
3	pH at 25 ˚C	APHA 24th Edition 4500 – H+ B: 2023	-	6.98	6.50-8.50
4	Electrical Conductivity	APHA 24th Edition 2510 B: 2023	(µS/cm)	1529	-
B.	**Chemical parameters**				
5	Total Dissolved Solids	APHA 24th Edition 2540-C: 2023	mg/L	930	2000
6	Total hardness (as CaCO3)	APHA 24th Edition 2340 C: 2023	mg/L	507	600
7	Calcium (as Ca)	IS 3025 (Part 40): 1991	mg/L	109	200
8	Magnesium (as Mg)	IS 3025 (Part 46): 1994	mg/L	56.1	100
9	Calcium Hardness (as CaCO3)	APHA 24th Edition 3500 Ca B: 2023	mg/L	273	-
10	Magnesium Hardness (as CaCO3)	APHA 24th Edition 3500 Mg B: 2023	mg/L	234	-
11	Total alkalinity (as CaCO3)	APHA 24th Edition 2320 B: 2023	mg/L	416	600
12	Chloride (as Cl)	APHA 24th Edition 4500 Cl- B: 2023	mg/L	256	1000

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3020

Report Date.	01.06.2024

Sl. No.	Parameters	Protocol	Unit	Result	*Limits Permissible
13	Free Residual chlorine	APHA 24th Edition 4500 Cl- B: 2023	mg/L	BDL (D.L - 0.2)	1.0
14	Sulphate as (SO42-)	APHA 24th Edition 4500 SO42- E: 2023	mg/L	220	400
15	Iron (as Fe)	APHA 24th Edition 3500 Fe B: 2023	mg/L	0.04	0.3
16	Nitrate (as NO3)	IS 3025 (Part 34): 1988	mg/L	4.85	45
17	Fluoride (as F)	APHA 24th Edition 4500 F- D: 2023	mg/L	0.36	1.5
18	Manganese (as Mn)	APHA 24th Edition 3500 Mn B: 2023	mg/L	BDL (D.L - 0.05)	0.3

Remarks: *Drinking Water Specifications as per IS – 10500:2012. BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd * Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:

(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

Shrient Analytical and Research Labs Pvt. Ltd

416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3021

Report Date.	01.06.2024

Customer Name & Address	Rough stone & Gravel Quarry of Thiru.V. Nagarajan extent of 4.75.00 Ha in S.F.Nos. 34/1B1, 35/2B, 35/3 and 35/4 of Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu
Sample Description	WATER
Sample Mark	W6-Tennampundi

Customer Reference	By Mail	Sampling Procedure	IS 17614: Part 14: 2021
Sample Reference No	SARL/W/CHE-3021	Sample Received on	27.05.2024
Sample Collected by	LABORATORY	Test Commenced on	27.05.2024
Sample Collected on	26.05.2024	Test Completed on	01.06.2024
Sample Condition	Fit for Analysis		

Sl. No.	Parameters	Protocol	Unit	Result	*Limits Permissible
A.	**Physical parameters**				
1	Odour	IS 3025 (Part 5): 2018	-	Agreeable	Agreeable
2	Turbidity	APHA 24th Edition 2130 B: 2023	NTU	<1.0	5.0
3	pH at 25 ˚C	APHA 24th Edition 4500 – H+ B: 2023	-	6.97	6.50-8.50
4	Electrical Conductivity	APHA 24th Edition 2510 B: 2023	(µS/cm)	723.7	-
B.	**Chemical parameters**				
5	Total Dissolved Solids	APHA 24th Edition 2540-C: 2023	mg/L	440	2000
6	Total hardness (as CaCO3)	APHA 24th Edition 2340 C: 2023	mg/L	234	600
7	Calcium (as Ca)	IS 3025 (Part 40): 1991	mg/L	64.9	200
8	Magnesium (as Mg)	IS 3025 (Part 46): 1994	mg/L	17.1	100
9	Calcium Hardness (as CaCO3)	APHA 24th Edition 3500 Ca B: 2023	mg/L	162	-
10	Magnesium Hardness (as CaCO3)	APHA 24th Edition 3500 Mg B: 2023	mg/L	71.3	-
11	Total alkalinity (as CaCO3)	APHA 24th Edition 2320 B: 2023	mg/L	263	600
12	Chloride (as Cl)	APHA 24th Edition 4500 Cl- B: 2023	mg/L	102.0	1000

Shrient Analytical and Research Labs Pvt. Ltd
416/15, Dhargas Road, West Tambaram, Chennai- 600045
Phone Number +91 82208 36377 Email: - **info@shrientanalytical.com**
www.shrientanalytical.com

TEST REPORT

Report No.	SARL/2024/3021

Report Date.	01.06.2024

Sl. No.	Parameters	Protocol	Unit	Result	*Limits
					Permissible
13	Free Residual chlorine	APHA 24th Edition 4500 Cl- B: 2023	mg/L	BDL (D.L - 0.2)	1.0
14	Sulphate as (SO42-)	APHA 24th Edition 4500 SO42- E: 2023	mg/L	82.6	400
15	Iron (as Fe)	APHA 24th Edition 3500 Fe B: 2023	mg/L	0.02	0.3
16	Nitrate (as NO3)	IS 3025 (Part 34): 1988	mg/L	3.26	45
17	Fluoride (as F)	APHA 24th Edition 4500 F- D: 2023	mg/L	0.42	1.5
18	Manganese (as Mn)	APHA 24th Edition 3500 Mn B: 2023	mg/L	BDL (D.L - 0.05)	0.3

Remarks: *Drinking Water Specifications as per IS – 10500:2012. BDL – Below Detectable limit (DL - Detectable limit).

For Shrient Analytical and Research Labs Pvt. Ltd

Verified

Shrient Analytical & Research Labs Pvt. Ltd * Chennai - 45

Authorized Signatory
J. GNANAPRAKASAM
Technical Manager

*****END OF THE REPORT*****

Please Contact:
For any Technical Issues & Complaints: vimalnath@shrientanalytical.com

Terms and conditions:
(1) The test items will not be retained for more than 15 days from the date of issue of test report. (2) The results relate only to the items tested (3) The test report shall not be reproduced except in full without the written approval of the laboratory (4) Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4. (5) The correctness of the information related to sample(s) in the Test Request Form/Customer letterhead/Email is the customer's responsibility. The laboratory reports the said information in the test report and is not liable for the same.

இணைப்பு-9

National Accreditation Board for Testing and Calibration Laboratories

CERTIFICATE OF ACCREDITATION

SHRIENT ANALYTICAL & RESEARCH LABS PRIVATE LIMITED

has been assessed and accredited in accordance with the standard

ISO/IEC 17025:2017

"General Requirements for the Competence of Testing & Calibration Laboratories"

for its facilities at

416/15, DHARGAS ROAD, PERUNGALATHUR, WEST TAMBARAM, CHENNAI, KANCHIPURAM, TAMIL NADU, INDIA

in the field of

TESTING

Certificate Number: TC-12339

Issue Date: 30/09/2023 **Valid Until:** 29/09/2025

This certificate remains valid for the Scope of Accreditation as specified in the annexure subject to continued satisfactory compliance to the above standard & the relevant requirements of NABL.
(To see the scope of accreditation of this laboratory, you may also visit NABL website www.nabl-india.org)

Name of Legal Entity: SHRIENT ANALYTICAL AND RESEARCH LABS PRIVATE LIMITED

Signed for and on behalf of NABL

N. Venkateswaran
Chief Executive Officer

இணைப்பு-10

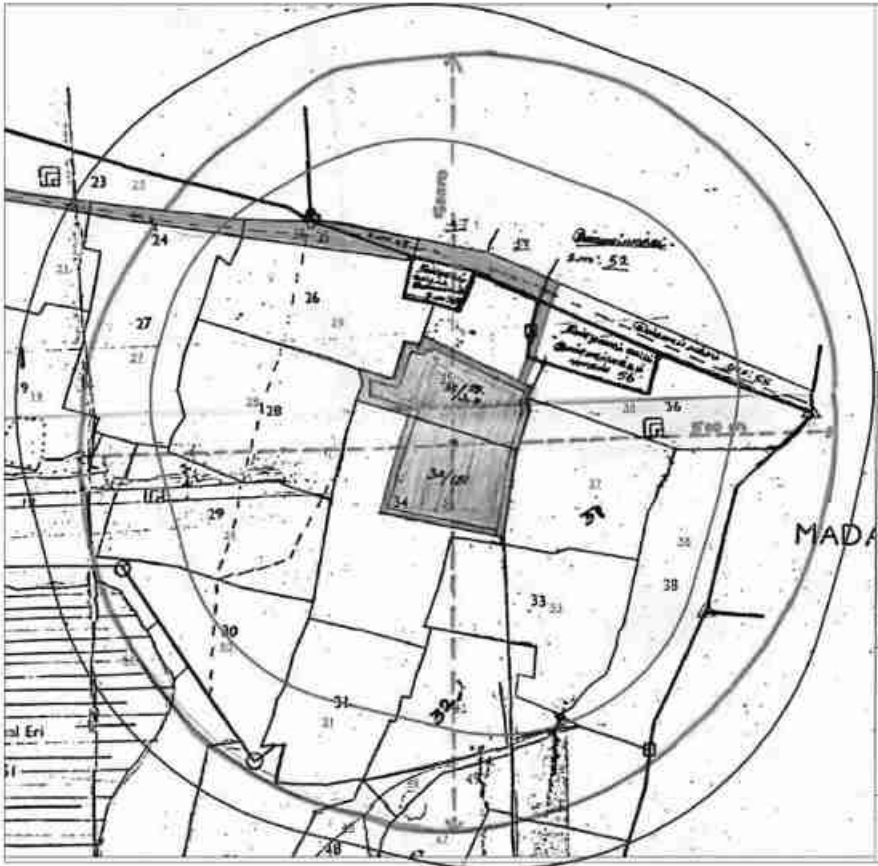

APPLICANT:

THIRU.V.NAGARAJAN,
W/o VARATHARAO GOUNDER,
NO:65, MARAKKANAM ROAD,
PERUMUKKAL VILLAGE,
MARAKKANAM TALUK,
VILUPPURAM DISTRICT.

QUARRY LEASE APPLIED AREA:

S.F.NO'S : 34/1B1, 35/2B, 35/3 & 35/4,
EXTENT : 4.75.00 Hs.
VILLAGE : NALMUKKAL
TALUK : MARAKKANAM.
DISTRICT : VILUPPURAM.

INDEX

Q.L. APPLIED AREA

300m RADIUS

500m RADIUS

Global

இணைப்பு-11

PROPOSED ROUGH STONE AND GRAVEL QUARRY OF THIRU.V.NAGARAJAN OVER AN EXTENT 4.75.00HA LOCATED AT S.F.NO.34/1B1, 35/2B, 35/3, AND 35/4, OF NALMUKKAL VILLAGE, MARAKKANAM TALUK, VILUPPURAM DISTRICT, TAMIL NADU STATE.

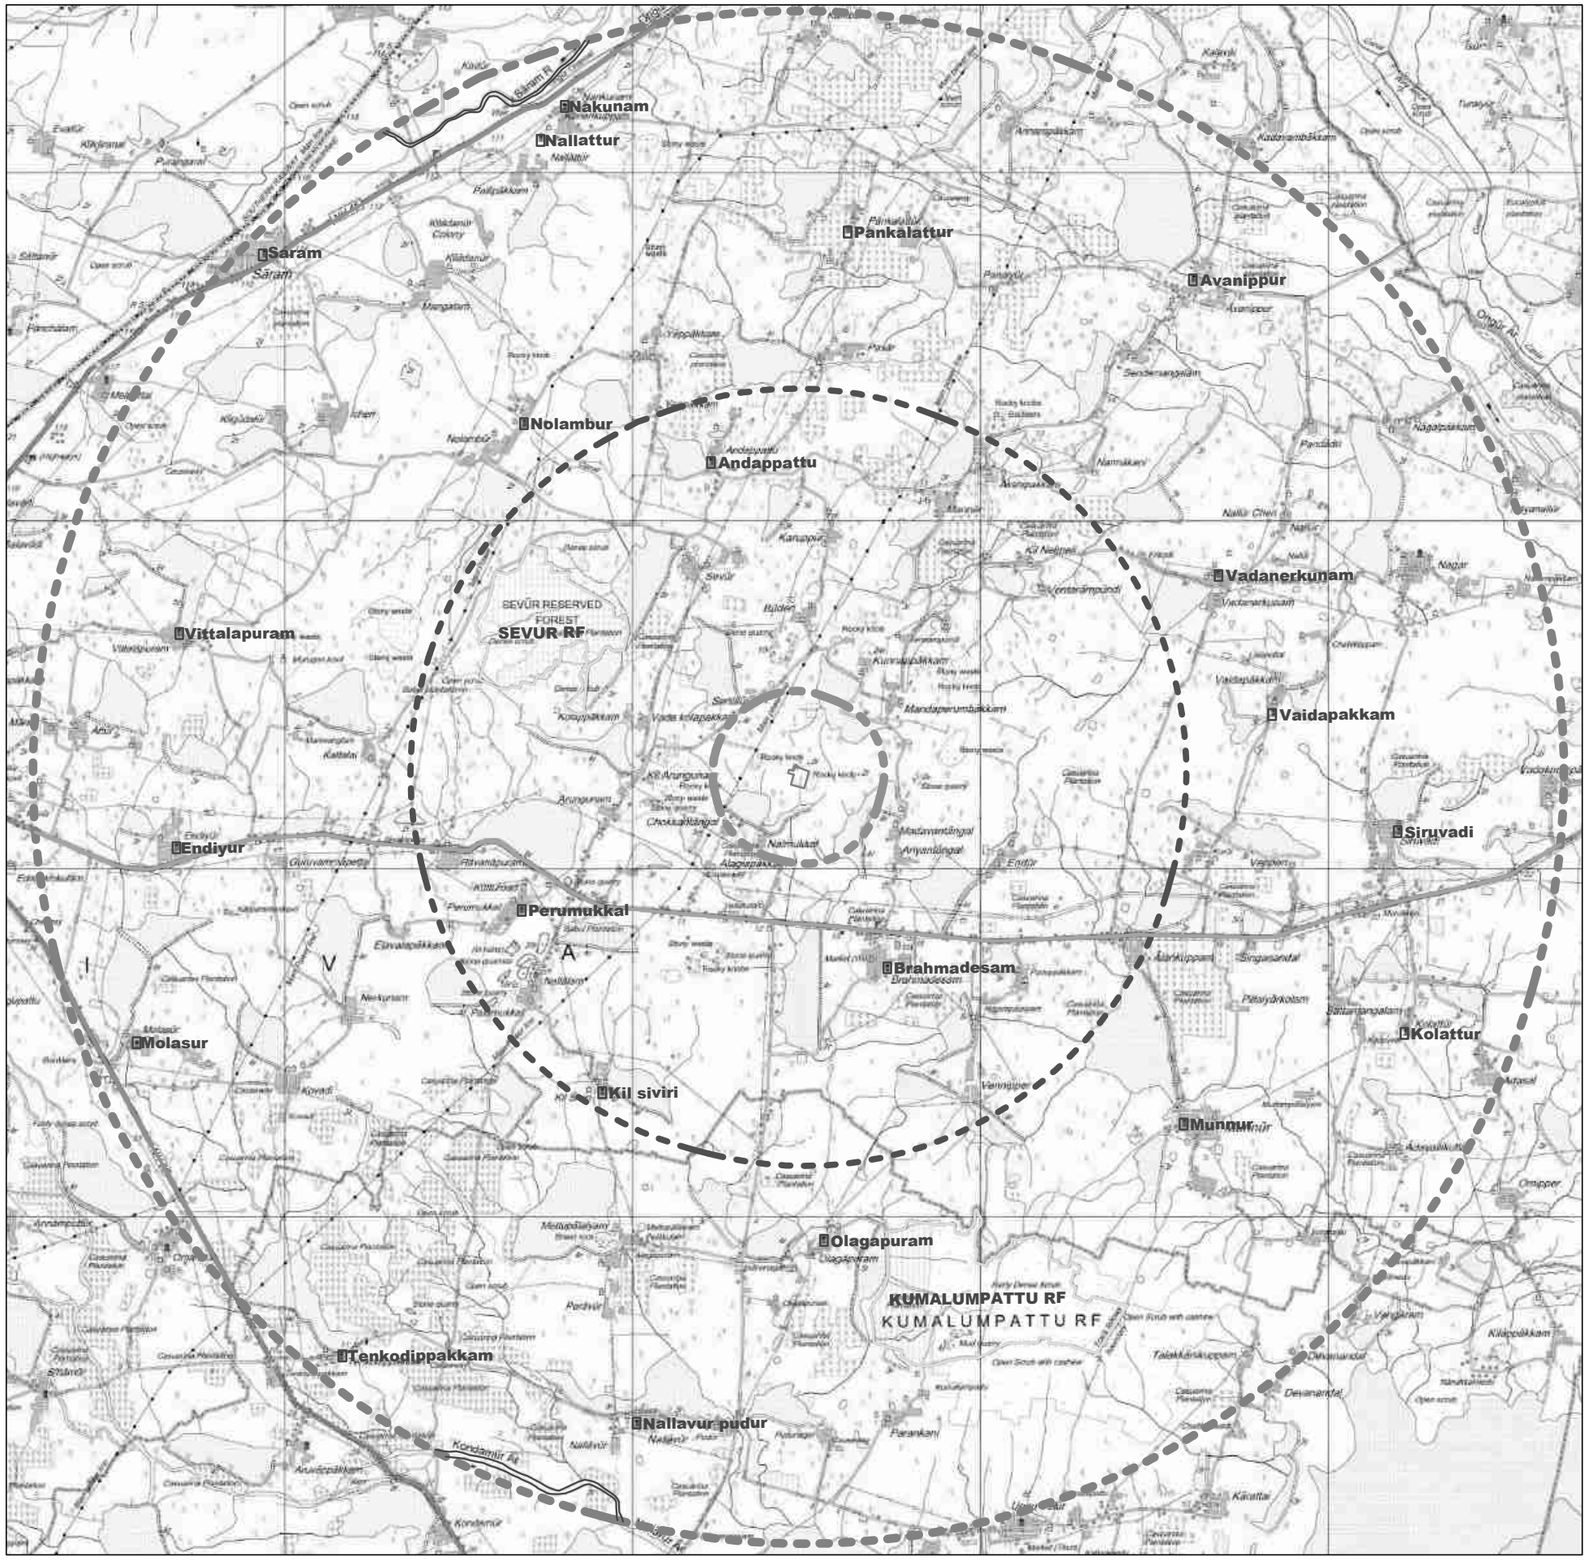

INDEX

TOPO SHEET NO: 57P/11, 57P/12, 57P/15, 57P/16

Q.L.APPLIED AREA	
10km RADIUS	
5.0km RADIUS	
1.0km RADIUS	
STATE HIGHWAY	
NATIONAL HIGHWAY	
HABITATION	
RIVER	
FOREST	

Global Mining Solutions

567

இணைப்பு-12

(5)

भारतीय गैर न्यायिक

एक सौ रुपये Rs. 100

रु. 100 ONE HUNDRED RUPEES

सत्यमेव जयते

भारत INDIA

INDIA NON JUDICIAL

தமிழ்நாடு तमिलनाडु TAMILNADU 20.05.2024

Rs. 100/
DR 082407

V. Nagarajan
Viluppuram

M. Jail

வி. நாகராஜன் (எ) தமிழ்ராசி, மு.தா.எ
உரிமம் எண்: 6206-14/91
கச்சேரி வீதி, ஒம்லூர்
சேலம் மாவட்டம்

AFFIDAVIT TO SEIAA - TAMIL NADU

I, Thiru.V.Nagarajan, S/o. Varadharaj Gounder, residing at No.65, Marakkanam Road, Perumukkal Village, Marakkanam Taluk, Viluppuram District, applying for Terms of Reference under Category B1 to SEIAA - Tamil Nadu for my proposed Rough stone and Gravel Quarry lease over an extent of 4.75.00 Ha located at the S.F.Nos.34/1B1, 35/2B, 35/3 and 35/4 in Nalmukkal Village, Marakkanam Taluk, Viluppuram District, Tamil Nadu State, do hereby solemnly declare and sincerely affirm that;

1. There are no protected areas notified under the Wildlife (Protection) Act, 1972 (NBWL) is located within a 10 km radius from the proposed quarry site.

2. There are a few Reserve Forests and waterbodies located within a 10 km radius of the proposed quarry site are listed below.

Reserve Forest	
Kilsevur R.F.	4.04 Km (NW)

NOTARY K. SRINIVASARAN, B.L., ADVOCATE Salem/Dt-636 455 Regn No. 10987/2015 Exp.Dt. 22.02.2025 GOVT. OF INDIA

Kumalampattu R.F.	7.17 Km (S)

3. There are no critically polluted areas as notified by the central pollution control board constituted under the Water (Prevention and Control of Pollution) Act 1974.
4. My proposal for Corporate Environment Responsibility (CER) activities is given as follows;

PROPOSED CER ACTIVITIES	PROJECT COST (INR)	CER COST 2.0% OF PROJECT COST (INR)
To implement various social development activities for the nearby government school	**Rs.1,30,70,000/-**	**2,61,400/-**
	EMP COST	6,70,000/-
Revised CER budget allotted	**5,00,000 (3.8 % of the project cost)**	

I assure you that, I will complete the above proposed Corporate Environment Responsibility (CER) activities before the commencement of the quarrying operations.

5. **Details of quarries located within a 500m radius from the applied mine lease area:**

S.No	Name of the Quarry Owner	S.F. Nos, Taluk, Village & Extent (Ha)	Lease Period	Remarks
a. Abandoned Quarry				
Nil				
b. Existing Quarry				
1.	Thiru.N. Gopinath, S/o.Natarajan, No.19, Nattamaikarar Street, Polambakkam Village, Cheyyur Village, Kanchipuram District	S.F.No: 33/5 (0.545 Ha), 37/3(1.14 Ha), 37/4(0.685 Ha), 37/5(0.40 Ha), 37/6(0.31 Ha), 37/7(0.27 Ha) Marakkanam Taluk, Nalmukkal Village, Villupuram District	Lease period of 21.03.2022 to 20.03.2027	Existing Rough stone & Gravel Quarry
2.	Thiru.D.Durai S/o, Dhanapal Gounder,	S.F.Nos 27/6 (0.40.5 Ha),	Lease period of 06.12.2022 to 05.12.2027	Existing Rough stone & Gravel

NOTARY K.SITHESWARAN, B.L., ADVOCATE Salem Dt:636 455 Regn No. 10987/2015 Exp.Dt. 22.02.2025 GOVT OF INDIA

	Keelarungunam Village, Perumukkal Post, Marakkanam Taluk, Viluppuram District	27/7 (0.39 Ha), 27/8 (0.405 Ha) Marakkanam Taluk, Nalmukkal Village, Villupuram District		Quarry
3.	Thiru. Ravichandiran S/o. Varatharaj Gounder, No.63/19, Perumukkal Village & Post, Marakkanam Taluk, Viluppuram District	S.F. Nos. 26/1B1(0.77 Ha), 27/3A(0.145 Ha), 27/3B(0.435 Ha) Marakkanam Taluk, Nalmukkal Village, Villupuram District	Lease period of 29.12.2022 to 28.12.2027	Existing Rough stone & Gravel Quarry
Area of total Existing Quarry		**5.90.00 Ha**		
c. Proposed Quarry				
1.	Thiru.V.Nagarajan S/o. Varadharaj Gounder, No.65, Marakkanam Road, Perumukkal Village, Marakkanam Taluk, Viluppuram District. Pin Code– 604301	S.F.No.34/1B1 (2.43 Ha), 35/2B(0.28 Ha), 35/3(0.88 Ha) and 35/4(1.16 Ha), Marakkanam Taluk, Nalmukkal Village, Villupuram District	-	Proposed
Area of Proposed Quarry		**4.75.00 Ha**		

The total lease within the 500m radius (Proposed + Existing) (1no + 3nos) works out to 10.65.00 Ha including this lease area.

6. There will be no hindrance/disturbance due to the proposed quarrying activities to the people living nearby my proposed quarry site.

7. There are no approved habitations within a 300m radius from the periphery of my proposed quarry lease.

8. I assure you that the greenbelt will be developed and maintained before commencing the quarrying operations as proposed in the EC application.

9. I assure you that the required life insurance policy for the employees engaged in the quarrying operations will be taken without fail.

10. The existing main road connecting the quarry road will be maintained in

good condition and it will be utilized for mineral transportation.

11. I assure you that I will not engage any child for labor in the quarrying operations and I am aware that engaging in child labor is punishable under the law.

12. Personnel Protective Equipment (PPE) will be provided to all the employees engaged in the quarrying operations.

13. No permanent structures, such as temples, etc., are located within a 300 meter radius of the periphery of our quarry.

14. I will erect the wire fence with barbed wires all around the periphery of the quarry lease before the commencement of mining activities.

15. The mining operations will be carried out in a systematic and scientific manner by employing a qualified statutory person as per the requirements of the Mines Act, Mines Rules, and other guidelines issued by the Govt.

16. I will inform DGMS before the commencement of mining activities.

17. To the best of our knowledge, I ensure to do the social and environmental commitments as mentioned in the mining plan.

Notary Sign & Seal

NOTARY K. SITHESWARAN, B.L., ADVOCATE Salem Dt-636 455 Regn No. 10987/2015 Exp Dt. 22.02.2025 GOVT. OF INDIA

Lessee Sign & Seal

V.Nagarajan

21/5/2024

K. SITHESWARAN, B.L.,
Advocate & Notary Public
Opp. BDO Office, Omalur (Tk),
SALEM (Dt) - 636 455.
Regn. No: 10987/2015
Cell: 94435 16211

இணைப்பு-13

"நம் பள்ளி" "நம் பெருமை"

பள்ளி மேலாண்மைக் குழு

ஊராட்சி ஒன்றிய தொடக்கப் பள்ளி

கீழ்அருங்குணம்-604 301,விழுப்புரம் மாவட்டம்.

தலைவர்
1.வெ.லதா
அலைபேசி எண்:9043451027
துணைத் தலைவர்
2.மு.மாலா
அலைபேசி எண்:6382352580
கூட்டஅழைப்பாளர்
(தலைமையாசிரியர்)
3. திரு.இரா.இரவிமணி
அலைபேசி எண்:9842930978
உறுப்பினர்கள்:
ஆசிரியர் பிரதிநிதி
4.க.வைஜெயந்தி
பெற்றோர் பிரதிநிதிகள்:
5.நா.திவ்யா
6.ச.சரவணன்
7.வி.மங்கலட்சுமி
8.பூ.சூரியா
9.ச.ஜீவிதா
10.த.சத்யா
11.வே.சரிதா
12.ச.புவனேஸ்வரி
13.ச.காமாட்சி
14.வே.புனிதா
15.வி.ஜெயம்மாள்
16.கு.மகாதேவி
உள்ளாட்சிப் பிரதிநிதிகள்:
17.ச.காமாட்சி
18.ப.சதிஷ்
கல்வியாளர்/அரசு சாரா
அமைப்பினர்/
ஓய்வு பெற்ற அலுவலர்
19.ச.பாக்கியலட்சுமி
சுய உதவிக்குழு உறுப்பினர்(பெற்றோர்)
20.வ.அம்பிகா

அனுப்புநர்:

க. [illegible]

தலைமை ஆசிரியர்

உ.ஒ.தொ.பள்ளி

கீழ்அருங்குணம்

நாள்: 2.4.2024

பெறுநர்:

திரு.வ.நாகராஜன் அரசுராஜ்கமிட்டி

மரக்காணம் ஒன்றியம்

மரக்காணம், விழுப்புரம் மாவட்டம்

பொருள்: மாணவர்கள் அமர்வதற்கு Table chair 10. கோரி

1. மாணவர்களுக்கு நிதியுதவி கோருதல்.
2. BSNL connection.
3. சுற்றுச் சுவரில் 20 மீட்டர் அளவிற்கு நாசி.

ஐயா வணக்கம்,

விழுப்புரம் மாவட்டம் மரக்காணம் ஒன்றியம் கீழ்அருங்குணம் உ.ஒ.தொ.பள்ளியில் 35 மாணவர்கள் பயிலுகின்றனர். அய்யா அவர்கள் மேலே குறிப்பிட்ட தேவைகளை மாணவர்களின் நலன் கருதி உடனடியாக நிறைவேற்றி தருமாறு தங்களை தாழ்மையுடன் கேட்டுக் கொள்கிறோம்.

நன்றி வணக்கம்.

தலைமை ஆசிரியர்,
உ.ஒ.தொ.பள்ளி, கீழ்அருங்குணம்,
மரக்காணம் ஒன்றியம்-604 301.